## **Submittal Data**

PROJECT:	UNIT TAG:	QUANTITY:	
	TYPE OF SERVICE:		
REPRESENTATIVE:	SUBMITTED BY:	DATE:	
ENGINEER:	APPROVED BY:	DATE:	
CONTRACTOR:	ORDER NO.:	DATE:	



## CRN 64-1-1 A-G-A-E-HQQE


Vertical, multistage centrifugal pump with suction and discharge ports on the same level. Pump materials in contact with the liquid are in high-grade stainless steel (EN 1.4401)

Note! Product picture may differ from actual product

Conditions	of Service
Liquid:	Water
Temperature:	68 °F
Specific Gravity:	1.000


Pump Data			
Max pressure at stated temp:	232 psi / 250 °F		
Liquid temperature range:	-40 248 °F		
Maximum ambient temperature:	104 °F		
Shaft seal:	HQQE		
Product number:	99918329		

Motor Data		
Rated power - P2:	10 HP	
Rated voltage:	208-230 V	
Mains frequency:	60 Hz	
Enclosure class:	IP55	
Insulation class:	F	
Motor protection:	NONE	
Motor type:	WEG	
Eta 1/1:	86.5 %	

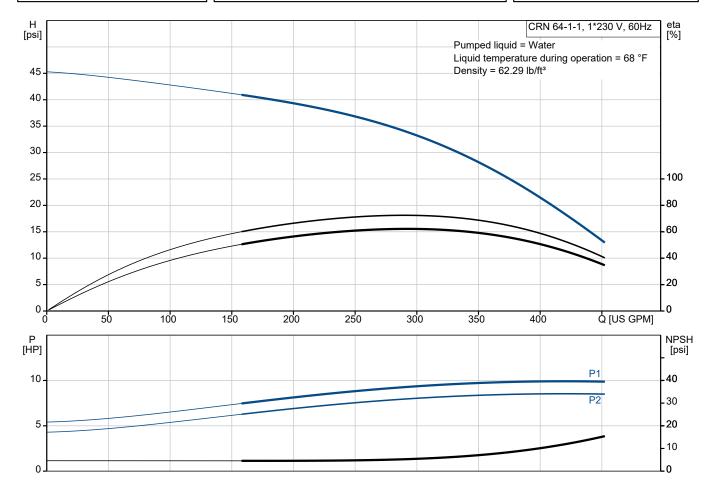

1

# Submittal Data

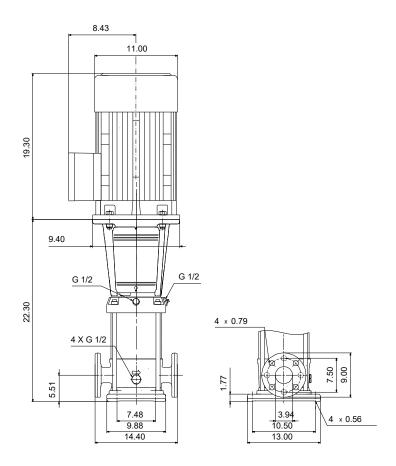

### Materials:

Base: Stainless steel
Base: EN 1.4408
Base: AISI 316
Impeller: Stainless steel
Impeller: AISI 316
Impeller: EN 1.4401

Material code: A
Code for rubber: E



**Date:** 02/05/2024

Qty. | Description

1 CRN 64-1-1 A-G-A-E-HQQE



Product No.: 99918329

Vertical, multistage centrifugal pump with inlet and outlet ports on same the level (inline). Pump materials in contact with the liquid are in high-grade stainless steel. A cartridge shaft seal ensures high reliability, safe handling, and easy access and service. Power transmission is via a rigid split coupling. Pipe connection is via ANSI flanges.

The pump is fitted with a 1-phase, fan-cooled asynchronous motor.

### **Further product details**

Steel, cast iron and aluminium components have an epoxy-based coating made in a cathodic electro-deposition (CED) process.

CED is a high-quality dip-painting process where an electrical field around the products ensures deposition of paint particles as a thin, well-controlled layer on the surface.

An integral part of the process is a pretreatment.


The entire process consists of these elements:

- 1) Alkaline-based cleaning.
- 2) Zinc phosphating.
- 3) Cathodic electro-deposition.
- 4) Curing to a dry film thickness 18-22 my m.


The colour code for the finished product is NCS 9000/RAL 9005.

### **Pump**

A standard split coupling connects the pump and motor shaft. It is enclosed in the pump head/motor stool by means of two coupling guards.



The motor stool connects the pump head and motor. The pump head has a combined 1/2" priming plug and vent screw.

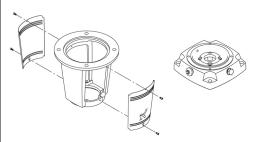

The pump is fitted with a balanced O-ring seal unit with a rigid torque-transmission system.

This seal type is assembled in a cartridge unit which makes replacement safe and easy.

Due to the balancing, this seal type is suitable for high-pressure applications.



**Date:** 02/05/2024

### Qty. | Description

1 The cartridge construction also protects the pump shaft from possible wear from a dynamic O-ring between pump shaft and shaft seal.

#### Seal faces:

- Rotating seal ring material: silicon carbide (SiC)
- Stationary seat material: silicon carbide (SiC)

This material pairing is used where higher corrosion resistance is required. The high hardness of this material pairing offers good resistance against abrasive particles.

Secondary seal material: EPDM (ethylene-propylene rubber)

EPDM has excellent resistance to hot water. EPDM is not suitable for mineral oils.





The shaft seal is retained in the pump head by a cover and screws. It can be replaced without removing the motor.

The chambers and impellers are made of stainless-steel sheet. The chambers are provided with a PTFE neck ring offering improved sealing and high efficiency. The impellers have smooth surfaces, and the shape of the blades ensure a high efficiency.


The pump has a stainless-steel base mounted on a separate base plate.

The base and base plate are kept in position by the tension of the staybolts which hold the pump together.

Both the inlet and the outlet side of the base have two pressure gauge tappings.

The pump is secured to the foundation by four bolts through the base plate.

The flanges are fastened to the base by means of locking rings.



#### Motor

The motor is a totally enclosed, fan-cooled motor with principal dimensions to IEC and DIN standards. The motor is flange-mounted with free-hole flange (FF).

Motor-mounting designation in accordance with IEC 60034-7: IM B 5 (Code I) / IM 3001 (Code II). Electrical tolerances comply with IEC 60034.

The motor does not incorporate motor protection and must be connected to a motor-protective circuit breaker which can be manually reset. The motor-protective circuit breaker must be set according to the rated current of the motor (I1/1).

The motor has built-in thermal protection (PTO current and temperature sensors) in accordance with IEC 60034-11 and requires no further motor protection. The protection reacts to both slow- and quick-rising temperatures, e.g. constant overload and stalled conditions.

As the thermal protection incorporates automatic reset, the motor must be connected in a way which ensures that the automatic reset cannot cause accidents.

#### **Technical data**

Liquid:

Pumped liquid: Water
Liquid temperature range: -40 .. 248 °F
Selected liquid temperature: 68 °F
Density: 62.29 lb/ft³



**Date:** 02/05/2024

### Qty. | Description

1 Technical:

Pump speed on which pump data are based: 3508 rpm

339 US GPM Rated flow: Rated head: 29.53 psi Actual impeller diameter: 5.59 in Pump orientation: Vertical Shaft seal arrangement: Single Code for shaft seal: **HQQE CURUS** Approvals: Approvals for drinking water: NSF/ANSI 61 Curve tolerance: ISO9906:2012 3B

Materials:

Impeller:

Base: Stainless steel

EN 1.4408 AISI 316 Stainless steel

EN 1.4401 AISI 316

Bearing: SIC Support bearing: Graflon

Installation:

Maximum ambient temperature: 104 °F
Maximum operating pressure: 232.06 psi
Max pressure at stated temp: 232 psi / 250 °F
232 psi / -40 °F

Type of connection: ANSI

Size of inlet connection: 4 inch
Size of outlet connection: 4 inch
Pressure rating for connection: PN 16
Flange rating inlet: 150 lb
Flange size for motor: 213TC

Electrical data:

Motor standard: NEMA
Motor type: WEG
Rated power - P2: 10 HP
Power (P2) required by pump: 10 HP
Mains frequency: 60 Hz

Rated voltage: 1 x 208-230 V

Service factor: 1.15 Rated current: 42.5-38.1 A Starting current: 720 % Cos phi - power factor: 0.99 Rated speed: 3510 rpm IE efficiency: 86.5% Motor efficiency at full load: 86.5 % Motor efficiency at 3/4 load: 85.5 % Motor efficiency at 1/2 load: 81.5 % Number of poles: 2 Enclosure class (IEC 34-5): IP55

Insulation class (IEC 85): F

Motor No: 99883306

Controls:

Frequency converter: None



**Date:** 02/05/2024

### Qty. | Description

1 Others:


DOE Pump Energy Index CL: 0.93
Net weight: 301 lb
Gross weight: 319 lb
Shipping volume: 17.5 ft³
Country of origin: US

Custom tariff no.: 8413.70.2040




**Date:** 02/05/2024

# 99918329 CRN 64-1-1 A-G-A-E-HQQE 60 Hz

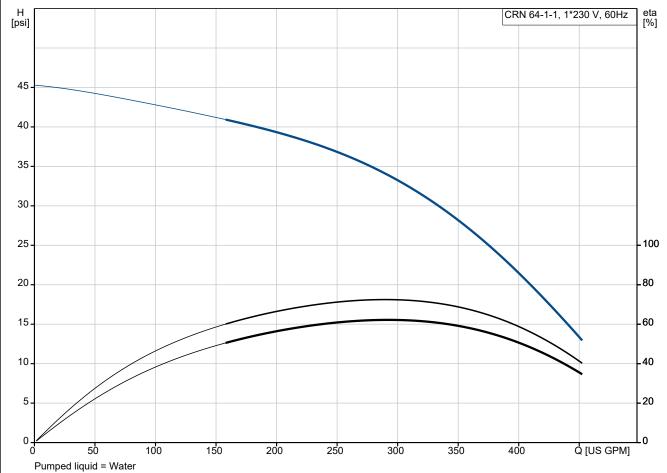


Liquid temperature during operation = 68 °F Density = 62.29 lb/ft³

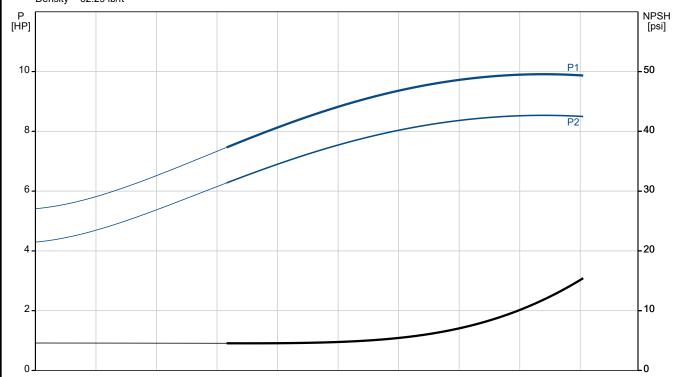





Date: 02/05/2024

Description	Value
eneral information:	
Product name:	CRN 64-1-1 A-G-A-E-HQQE
roduct No:	99918329
AN number:	5715114131964
echnical:	
ump speed on which pump data are ased:	3508 rpm
Rated flow:	339 US GPM
Rated head:	29.53 psi
laximum head:	45.43 psi
ctual impeller diameter:	5.59 in
tages:	1
npellers:	1
lumber of reduced-diameter impellers:	1
ow NPSH:	N
ump orientation:	Vertical
haft seal arrangement:	Single
ode for shaft seal:	HQQE
approvals:	CURUS
pprovals for drinking water:	NSF/ANSI 61
curve tolerance:	ISO9906:2012 3B
ump version:	Α
lodel:	В
ooling:	IC 411
aterials:	
ase:	Stainless steel
Base:	EN 1.4408
ase:	AISI 316
mpeller:	Stainless steel
mpeller:	EN 1.4401
npeller:	AISI 316
laterial code:	A
ode for rubber:	E
earing:	SIC
support bearing:	Graflon
nstallation:	
faximum ambient temperature:	104 °F
laximum operating pressure:	232.06 psi
lax pressure at stated temp:	232 psi / 250 °F
Max pressure at stated temp:	232 psi / -40 °F
Type of connection:	ANSI
ize of inlet connection:	4 inch
Size of outlet connection:	4 inch
ressure rating for connection:	PN 16
lange rating inlet:	150 lb
lange rating inlet.	213TC
connect code:	G G
	J
iquid:	Water
umped liquid:	Water
iquid temperature range:	-40 248 °F
selected liquid temperature:	68 °F
Density:	62.29 lb/ft³
lectrical data:	
lotor standard:	NEMA
Notor type:	WEG
Rated power - P2:	10 HP
ower (P2) required by pump:	10 HP

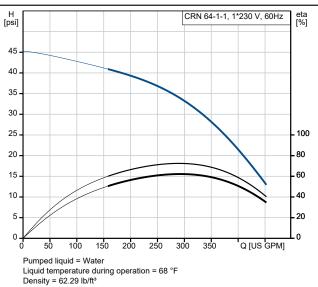

Density = 62.29 lb/ft<sup>3</sup>
PHP
INPSH
[psi]
10
8
P2
40
40
20
10

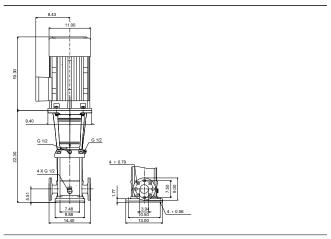

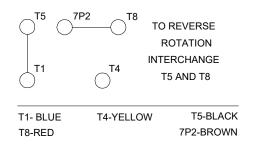




**Date:** 02/05/2024

Description	Value
Mains frequency:	60 Hz
Rated voltage:	1 x 208-230 V
Service factor:	1.15
Rated current:	42.5-38.1 A
Starting current:	720 %
Full load SF current:	42.5/43.8 A
Cos phi - power factor:	0.99
Rated speed:	3510 rpm
IE efficiency:	86.5%
Motor efficiency at full load:	86.5 %
Motor efficiency at 3/4 load:	85.5 %
Motor efficiency at 1/2 load:	81.5 %
Number of poles:	2
Enclosure class (IEC 34-5):	IP55
Insulation class (IEC 85):	F
Built-in motor protection:	NONE
Motor No:	99883306
Controls:	
Frequency converter:	None
Others:	
DOE Pump Energy Index CL:	0.93
Net weight:	301 lb
Gross weight:	319 lb
Shipping volume:	17.5 ft³
Country of origin:	US
Custom tariff no.:	8413.70.2040



**Date:** 02/05/2024


# 99918329 CRN 64-1-1 A-G-A-E-HQQE 60 Hz

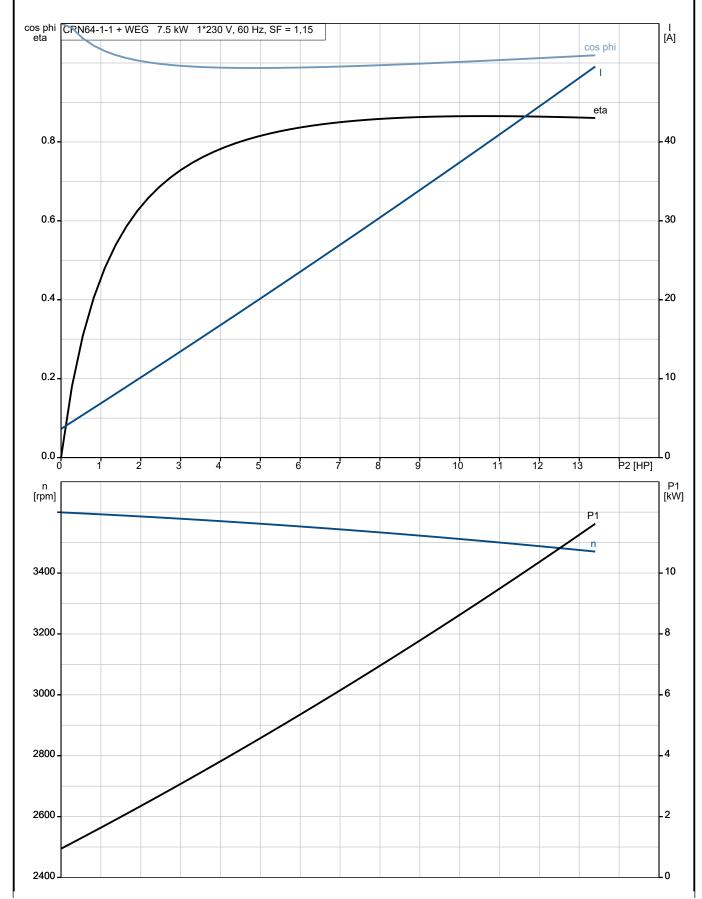




02/05/2024 Date:

# 99918329 CRN 64-1-1 A-G-A-E-HQQE 60 Hz

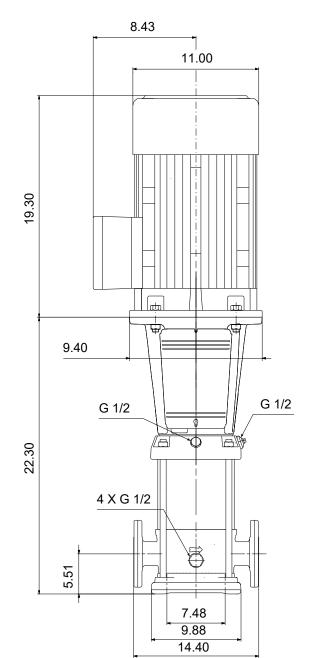

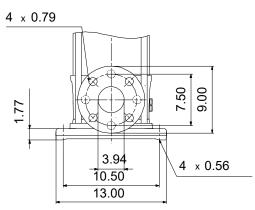

Note! All units are in [in] unless others are stated. Disclaimer: This simplified dimensional drawing does not show all details.



Date:

02/05/2024

# 99918329 CRN 64-1-1 A-G-A-E-HQQE 60 Hz

TO REVERSE **8 L** 

**7P2** 

ROTATION INTERCHANGE T5 AND T8

7P2-BROWN

T4-YELLOW

Note! All units are in [in] unless others are stated.