Submittal Data

PROJECT:	UNIT TAG:	QUANTITY:
	TYPE OF SERVICE:	
REPRESENTATIVE:	SUBMITTED BY:	DATE:
ENGINEER:	APPROVED BY:	DATE:
CONTRACTOR:	ORDER NO.:	DATE:




CRN 64-4 A-G-A-V-HQQV


Vertical, multistage centrifugal pump with suction and discharge ports on the same level. Pump materials in contact with the liquid are in high-grade stainless steel (EN 1.4401)

Note! Product picture may differ from actual product

Conditions of Service		Pump Data	Motor Data		
Liquid: Temperature: Specific Gravity:	Water 68 °F 1.000	Max pressure at stated temp: Liquid temperature range: Maximum ambient temperature: Shaft seal: Product number:	435 psi / 194 °F -4 194 °F 104 °F HQQV 99918354	Rated power - P2: Rated voltage: Mains frequency: Enclosure class: Insulation class: Motor protection: Motor type: Eta 1/1:	50 HP 230/460 V 60 Hz IP55 F NONE WEG 93 %

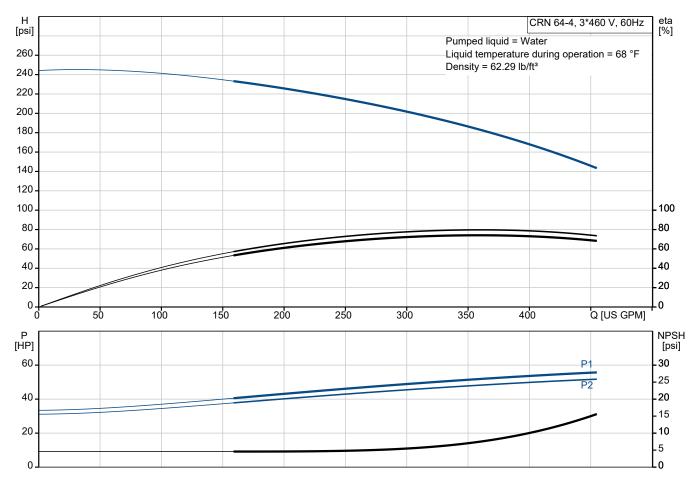

Submittal Data

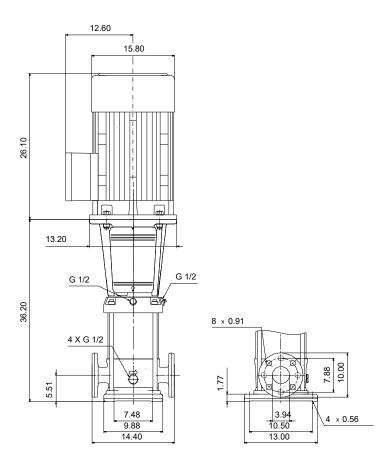

Materials:

Base:	Stainless steel
Base:	EN 1.4408
Base:	AISI 316
Impeller:	Stainless steel
Impeller:	AISI 316
Impeller:	EN 1.4401
Material code:	А
Code for rubber:	V

	GRUNDFOS	Company na Created by: Phone:	ame:	
		Date:	09/05/2024	
Qty.	Description			
1	CRN 64-4 A-G-A-V-HQQV			
	Product No.: 99918354			
	Vertical, multistage centrifugal pump with inlet and out with the liquid are in high-grade stainless steel. A cartr access and service. Power transmission is via a rigid s	idde shaft seal ei	nsures high reliability, safe handling, and easy	
	The pump is fitted with a 3-phase, fan-cooled asynchro	onous motor.		
	Further product details			
	Steel, cast iron and aluminium components have an eq (CED) process.	poxy-based coati	ng made in a cathodic electro-deposition	
	CED is a high-quality dip-painting process where an el particles as a thin, well-controlled layer on the surface.	ectrical field arou	ind the products ensures deposition of paint	
	particles as a thin, well-controlled layer on the surface. An integral part of the process is a pretreatment.			
	 The entire process consists of these elements: 1) Alkaline-based cleaning. 2) Zinc phosphating. 3) Cathodic electro-deposition. 4) Curing to a dry film thickness 18-22 my m. The colour code for the finished product is NCS 9000/I 	RAL 9005.		
Pump A long split coupling connects the pump and motor shaft. It is enclosed in the motor stool by means of two cou guards. The long coupling makes it possible to replace the shaft seal without removing the motor from the pum				
	Cara			
	The motor stool connects the pump head and motor. T screw.	he pump head h	as a combined 1/2" priming plug and vent	
	The pump is fitted with a balanced O-ring seal unit with	n a rigid torque-tr	ansmission system.	



09/05/2024

Qty. | Description

1

This seal type is assembled in a cartridge unit which makes replacement safe and easy.

Due to the balancing, this seal type is suitable for high-pressure applications.

The cartridge construction also protects the pump shaft from possible wear from a dynamic O-ring between pump shaft and shaft seal.


Seal faces:

- Rotating seal ring material: silicon carbide (SiC)
- Stationary seat material: silicon carbide (SiC)

This material pairing is used where higher corrosion resistance is required. The high hardness of this material pairing offers good resistance against abrasive particles.

Secondary seal material: FKM (fluorocarbon rubber)

FKM has excellent resistance to oils and chemicals. Above 90 °C, FKM should only be used in media without water.



The shaft seal is retained in the pump head by a cover and screws. It can be replaced without removing the motor.


The chambers and impellers are made of stainless-steel sheet. The chambers are provided with a PTFE neck ring offering improved sealing and high efficiency. The impellers have smooth surfaces, and the shape of the blades ensure a high efficiency.

The pump has a stainless-steel base mounted on a separate base plate.

The base and base plate are kept in position by the tension of the staybolts which hold the pump together. Both the inlet and the outlet side of the base have two pressure gauge tappings.

The pump is secured to the foundation by four bolts through the base plate.

The flanges are fastened to the base by means of locking rings.



Motor

The motor is a totally enclosed, fan-cooled motor with principal dimensions to IEC and DIN standards. The motor is flange-mounted with free-hole flange (FF).

Motor-mounting designation in accordance with IEC 60034-7: IM B 5 (Code I) / IM 3001 (Code II).

Electrical tolerances comply with IEC 60034.

The motor efficiency is classified as premium efficiency in accordance with EISA2007.

The motor does not incorporate motor protection and must be connected to a motor-protective circuit breaker which can be manually reset. The motor-protective circuit breaker must be set according to the rated current of the motor (I1/1).

The motor can be connected to a variable speed drive for adjustment of pump performance to any duty point. Grundfos CUE offers a range of variable speed drives. Please find more information in Grundfos Product Center.

Technical data


Liquid:	
Pumped liquid:	Water
Liquid temperature range:	-4 194 °F
Selected liquid temperature:	68 °F



			Date:	09/05/2024	
•	Description				
	Density:	62.29 lb/ft ³			
	T - shuis - sh				
	Technical:	hd. 2550.			
	Pump speed on which pump data		rpm		
	Rated flow:	339 US GPM			
	Rated head:	191.1 psi			
	Actual impeller diameter:	5.59 in			
	Pump orientation:	Vertical			
	Shaft seal arrangement:	Single			
	Code for shaft seal:	HQQV			
	Approvals:	CURUS			
	Curve tolerance:	ISO9906:2012 3B			
	Materials:				
	Base:	Stainless steel			
		EN 1.4408			
		AISI 316			
	Impeller:	Stainless steel			
		EN 1.4401			
		AISI 316			
	Bearing:	SIC			
	Support bearing:	Graflon			
	Installation:				
	Maximum ambient temperature:	104 °F			
	Maximum operating pressure:	435.11 psi			
	Max pressure at stated temp:	435 psi / 194 °F			
	······ [·······	435 psi / -4 °F			
	Type of connection:	ANSI			
	Size of inlet connection:	4 inch			
	Size of outlet connection:	4 inch			
	Pressure rating for connection:	PN 40			
	Flange rating inlet:	300 lb			
	Flange size for motor:	324TC			
	Electrical data:				
	Motor standard:	NEMA			
	Motor type:	WEG			
	Rated power - P2:	50 HP			
	Power (P2) required by pump:	50 HP			
	Mains frequency:	60 Hz			
	Rated voltage:	3 x 230/460 V			
	Service factor:	1.25			
	Rated current:	112/56.1 A			
	Starting current:	620 %			
	Cos phi - power factor:	0.89			
	Rated speed:	3550 rpm			
	IE efficiency:	IE3 93%			
	IE Efficiency class:	IE3 / NEMA Premiu	m		
	Motor efficiency at full load:	93 %			
	Motor efficiency at 3/4 load:	93 %			
	Motor efficiency at 1/2 load:	93 %			
	Number of poles:	2			
	Enclosure class (IEC 34-5):	IP55			
	Insulation class (IEC 85):	F			
	Motor No:	99883252			



	GRUNDF	OS X	Phone:		
			Date:	09/05/2024	
Qty.	Description				
1	Frequency converter:	None			
	Others:				
	DOE Pump Energy Index CL:	0.93			
	Net weight:	783 lb			
	Gross weight:	801 lb 39.9 ft ³			
	Shipping volume: Country of origin:	US			
	Custom tariff no.:	8413.70.2040			

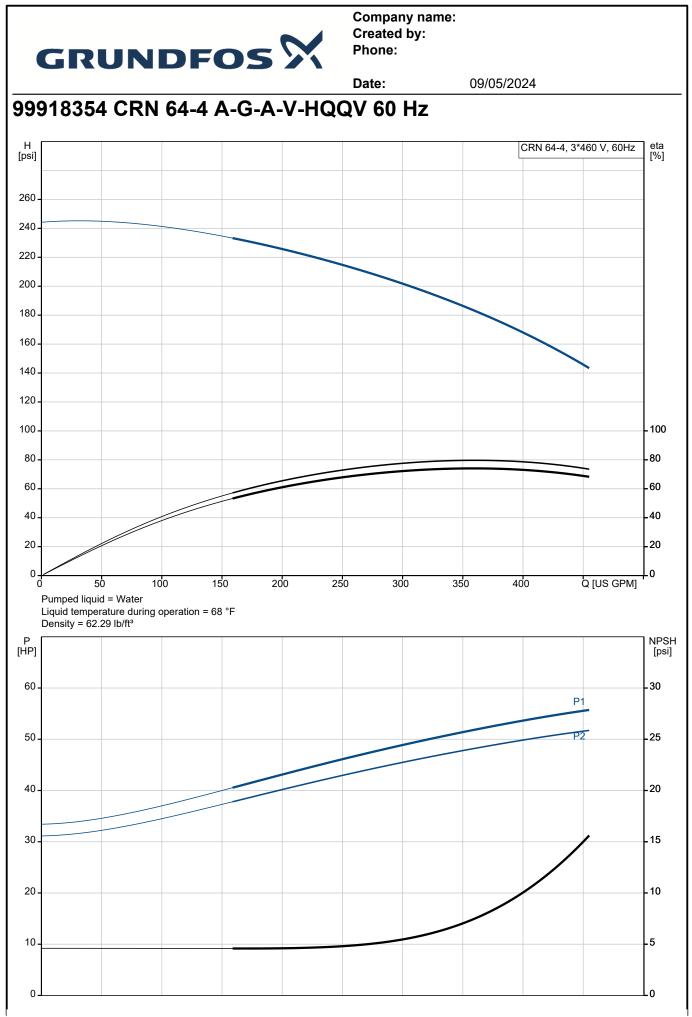





		Date: 09/05/2024
Description	Value	[psi]
General information:		260 -
Product name:	CRN 64-4 A-G-A-V-HQQV	240
Product No:	99918354	200
EAN number:	5715114132213	180 -
Technical:		
Pump speed on which pump data are based:	3550 rpm	140
Rated flow:	339 US GPM	120 -
Rated head:	191.1 psi	100 - 100
Maximum head:	243.6 psi	80
Actual impeller diameter:	5.59 in	60 - 60
Stages:	4	40 - 40
Impellers:	4	20 - 20
Number of reduced-diameter impellers:	0	0 0 50 100 150 200 250 300 350 Q [US GPM]
Low NPSH	N	
	Vertical	Pumped liquid = Water Liquid temperature during operation = 68 °F
Pump orientation:		Density = 62.29 lb/ft ³
Shaft seal arrangement: Code for shaft seal:	Single HQQV	P NPS [HP]
Approvals:	CURUS	
Curve tolerance:	ISO9906:2012 3B	50 - P2 - 25
Pump version:	A	40 - 20
Model:	В	
Cooling:	IC 411	30 15
Materials:		20 10
Base:	Stainless steel	
Base:	EN 1.4408	105
Base:	AISI 316	
Impeller:	Stainless steel	
Impeller:	EN 1.4401	•
Impeller:	AISI 316	15.80
Material code:	А	
Code for rubber:	V	
Bearing:	SIC	
Support bearing:	Graflon	
Installation:		
Maximum ambient temperature:	104 °F	
Maximum operating pressure:	435.11 psi	
Max pressure at stated temp:	435 psi / 194 °F	G 1/2
Max pressure at stated temp:	435 psi / -4 °F	
Type of connection:	ANSI	
Size of inlet connection:	4 inch	
Size of outlet connection:	4 inch	
Pressure rating for connection:	PN 40	7.48 9.88 14.40 13.00 13.00
Flange rating inlet:	300 lb	13.00
Flange size for motor:	324TC	
Connect code:	G	
Liquid:	9	
	Wator	$ \geq$ 15 16 14 $\frac{17}{4}$ 15 16 14
Pumped liquid:	Water	$ \gamma$ γ γ γ γ γ γ γ γ γ
Liquid temperature range:	-4 194 °F	$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$
Selected liquid temperature:	68 °F	
Density:	62.29 lb/ft ³	\wedge L2 L3 L1 $\stackrel{4}{\bullet}$ \wedge L2 L3 L1
Electrical data:		
Motor standard:	NEMA	
Motor type:	WEG	
Rated power - P2:	50 HP	
Power (P2) required by pump:	50 HP	
Mains frequency:	60 Hz	



		Date:	09/05/2024	
Description	Value			
Rated voltage:	3 x 230/460 V	_		
Service factor:	1.25			
Rated current:	112/56.1 A			
Starting current:	620 %			
Full load SF current:	140/70.1 A			
Cos phi - power factor:	0.89			
Rated speed:	3550 rpm			
IE efficiency:	IE3 93%			
IE Efficiency class:	IE3 / NEMA Premium			
Motor efficiency at full load:	93 %			
Motor efficiency at 3/4 load:	93 %			
Motor efficiency at 1/2 load:	93 %			
Number of poles:	2			
Enclosure class (IEC 34-5):	IP55			
Insulation class (IEC 85):	F			
Built-in motor protection:	NONE			
Motor No:	99883252			
Controls:				
Frequency converter:	None			
Others:				
DOE Pump Energy Index CL:	0.93			
Net weight:	783 lb			
Gross weight:	801 lb			
Shipping volume:	39.9 ft ³			
Country of origin:	US			
Custom tariff no.:	8413.70.2040			

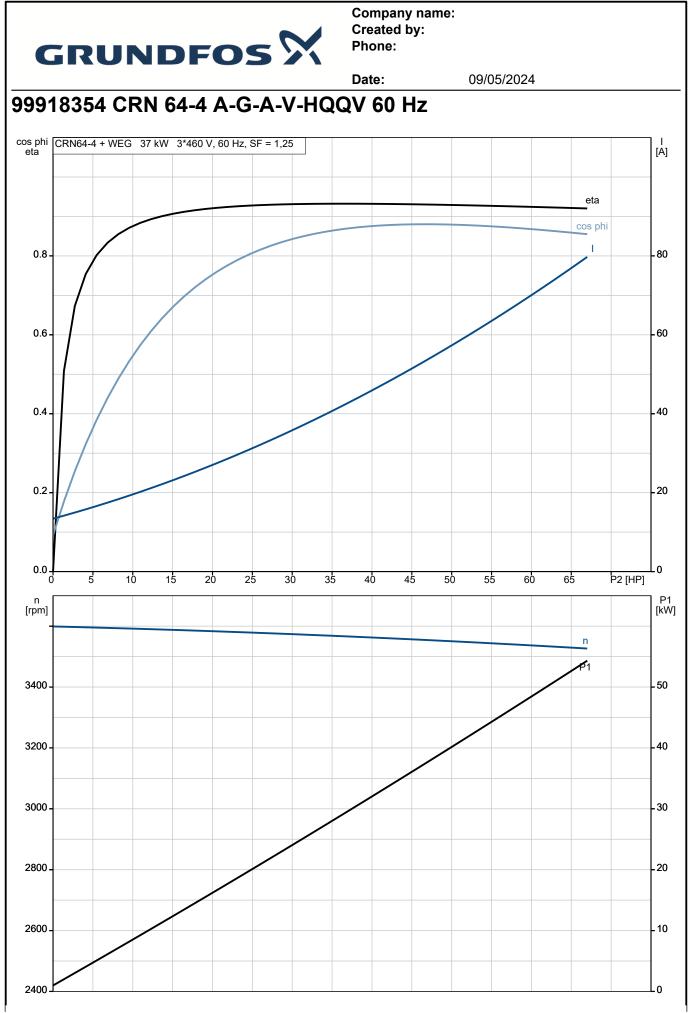


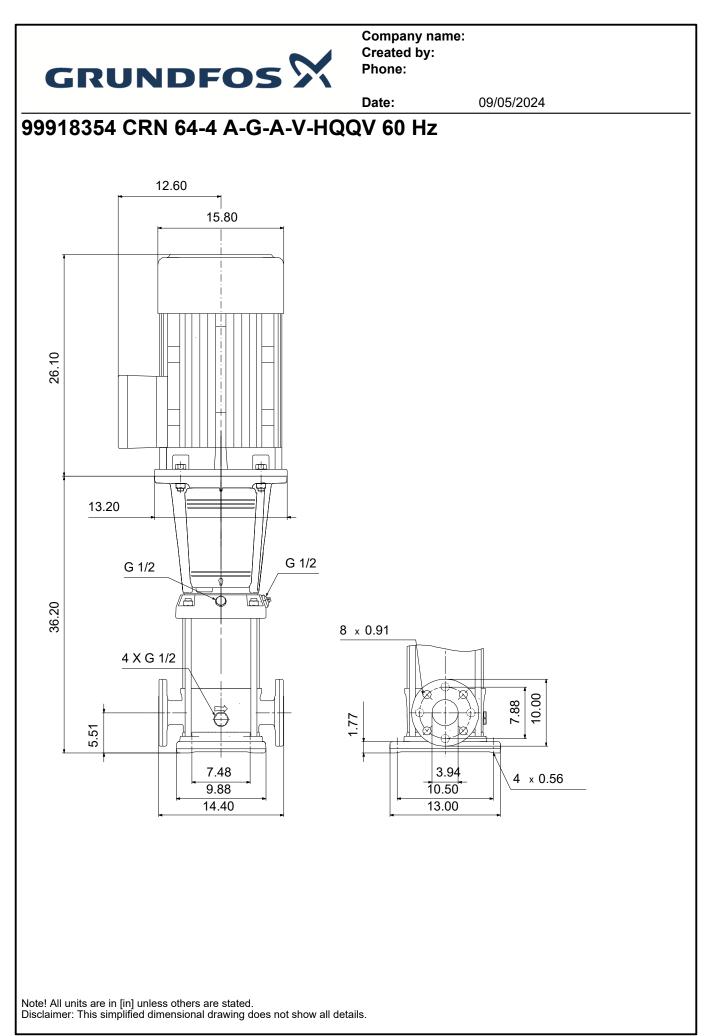




09/05/2024

99918354 CRN 64-4 A-G-A-V-HQQV 60 Hz

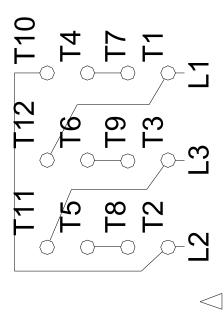

460//380-415

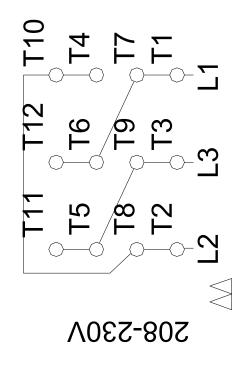

Note! All units are in [in] unless others are stated.