

Submittal Data

PROJECT:	UNIT TAG:	QUANTITY:
REPRESENTATIVE: _____	TYPE OF SERVICE:	DATE: _____
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:
	ORDER NO.:	DATE:




CRE 32-3-2 N-G-A-E-HQQE


Vertical, multistage centrifugal pump with integrated frequency converter. The pump head and base are in cast iron - all other wetted parts are in stainless steel (EN 1.4301)

Note! Product picture may differ from actual product

Conditions of Service	Pump Data	Motor Data
Liquid: Water Temperature: 68 °F Specific Gravity: 1.000	Max pressure at stated temp: 232 psi / 250 °F Liquid temperature range: -22 .. 248 °F Maximum ambient temperature: 122 °F Shaft seal: HQQE Product number: 99076527	Rated power - P2: 10 HP Rated voltage: 440-480 V Mains frequency: 60 Hz Enclosure class: IP55 Insulation class: F Motor protection: ELEC Motor type: 132F Eta 1/1: 92.5 %

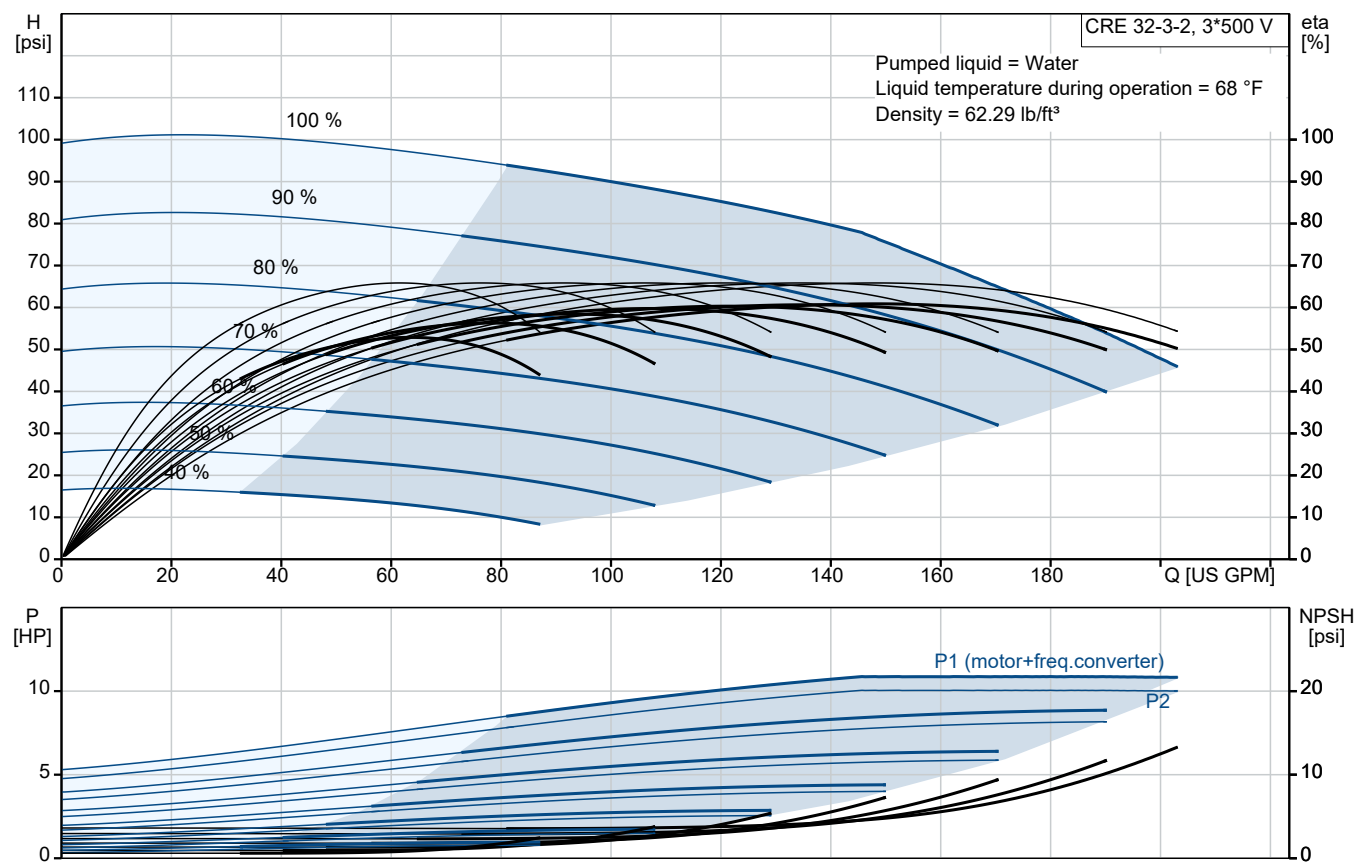

# Submittal Data

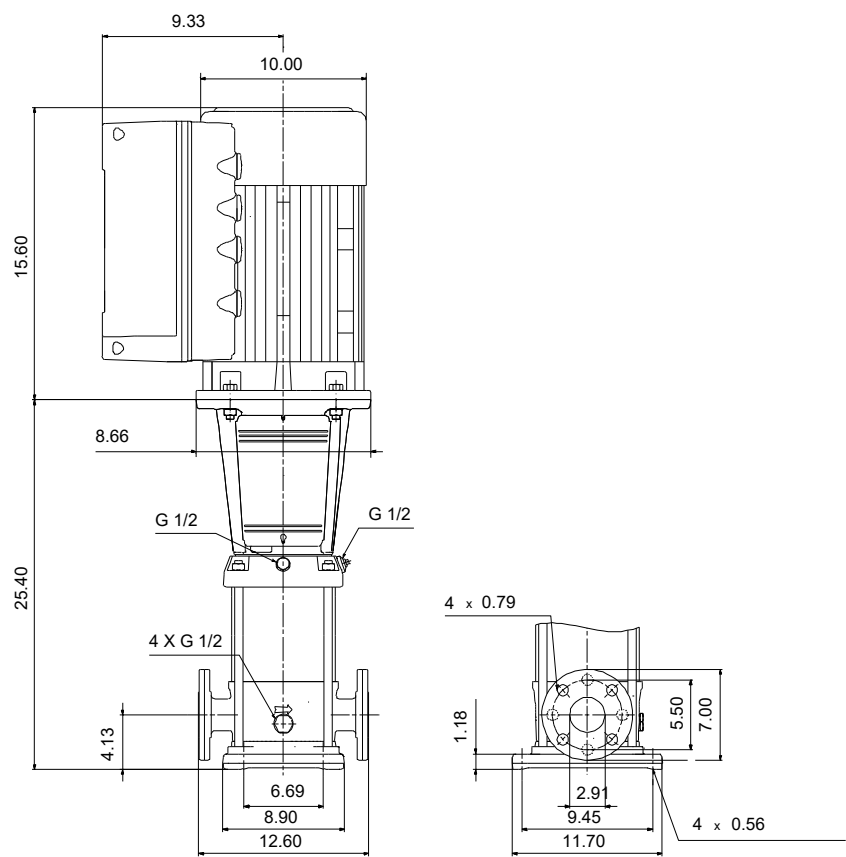

**Materials:**

Base:	Cast iron
Base:	EN 1563 EN-GJS-500-7
Base:	ASTM A536 80-55-06
Impeller:	Stainless steel
Impeller:	AISI 304
Impeller:	EN 1.4301
Material code:	A
Code for rubber:	E

## Qty. Description

1

**CRE 32-3-2 N-G-A-E-HQQE**



**Note! Product picture may differ from actual product**

Product No.: [99076527](#)

Vertical, multistage centrifugal pump with inlet and outlet ports on same the level (inline). The pump head and base are in cast iron – all other wetted parts are in stainless steel. A cartridge shaft seal ensures high reliability, safe handling, and easy access and service. Power transmission is via a rigid split coupling. Pipe connection is via ANSI flanges.

The pump is fitted with a 3-phase, fan-cooled, permanent-magnet, synchronous motor. The motor efficiency is classified as IE5 in accordance with IEC 60034-30-2.

The motor includes a frequency converter and PI controller in the motor terminal box. This enables continuously variable control of the motor speed, which again enables adaptation of the performance to a given requirement. The operating panel on the motor terminal box features a four-inch TFT display, push-buttons and the Grundfos Eye indicator.

The display gives an intuitive and user-friendly interface to all functions.

The push-buttons are used to navigate through the menu structure to access pump and performance data on site and enable setting of required setpoint as well as setting of pump to "Min." or "Max." operation or to "Stop".

The Grundfos Eye indicator on the operating panel provides visual indication of pump status:

- "Power on": Motor is running (rotating green indicator lights) or not running (permanently green indicator lights)
- "Warning": Motor is still running (rotating yellow indicator lights) or has stopped (permanently yellow indicator lights)
- "Alarm": Motor has stopped (flashing red indicator lights).

Communication with the pump is also possible by means of Grundfos GO Remote (accessory). The remote control enables further settings as well as reading out of a number of parameters such as "Actual value", "Speed", "Power input" and total "Power consumption".

The terminal box has a number of inputs and outputs enabling the motor to be used in advanced applications where many inputs and outputs are required:



- two dedicated digital inputs
- three analog inputs, 0(4)-20 mA, 0-5 V, 0-10 V, 0.5 - 3.5 V; the factory-fitted pressure sensor is connected to one of these inputs
- 5 V voltage supply to potentiometer and sensor
- one analog output, 0-10 V, 0(4)-20 mA
- two configurable digital inputs or open-collector outputs
- two Pt100/Pt1000 inputs
- LiqTec, dry-running protection sensor input
- Grundfos Digital Sensor input and output
- 24 V voltage supply for sensors
- two signal-relay outputs (potential-free contacts)
- GENIbus connection
- interface for Grundfos CIM fieldbus module.

### Further product details

The pump is equipped with a pressure sensor registering pump outlet pressure and enabling controlled pump operation based on constant pressure.


The operating panel on the motor terminal box features a four-inch TFT display, push-buttons and the Grundfos Eye indicator.

The display gives an intuitive and user-friendly interface to all functions.

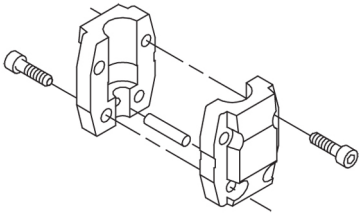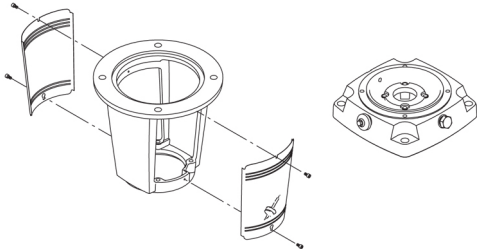Qty.	Description
1	<p>The push-buttons are used to navigate through the menu structure to access pump and performance data on site and enable setting of required setpoint as well as setting of pump to "Min." or "Max." operation or to "Stop".</p> <p>The Grundfos Eye indicator on the operating panel provides visual indication of pump status:</p> <ul style="list-style-type: none"> <li>"Power on": Motor is running (rotating green indicator lights) or not running (permanently green indicator lights)</li> <li>"Warning": Motor is still running (rotating yellow indicator lights) or has stopped (permanently yellow indicator lights)</li> <li>"Alarm": Motor has stopped (flashing red indicator lights).</li> </ul> <p>Communication with the pump is also possible by means of Grundfos GO Remote (accessory). The remote control enables further settings as well as reading out of a number of parameters such as "Actual value", "Speed", "Power input" and total "Power consumption".</p> <p>Steel, cast iron and aluminium components have an epoxy-based coating made in a cathodic electro-deposition (CED) process.</p> <p>CED is a high-quality dip-painting process where an electrical field around the products ensures deposition of paint particles as a thin, well-controlled layer on the surface.</p> <p>An integral part of the process is a pretreatment.</p> <p>The entire process consists of these elements:</p> <ol style="list-style-type: none"> <li>1) Alkaline-based cleaning.</li> <li>2) Zinc phosphating.</li> <li>3) Cathodic electro-deposition.</li> <li>4) Curing to a dry film thickness 18-22 my m.</li> </ol> <p>The colour code for the finished product is NCS 9000/RAL 9005.</p> <p><b>Pump</b></p> <p>A standard split coupling connects the pump and motor shaft. It is enclosed in the pump head/motor stool by means of two coupling guards.</p>  <p>The motor stool connects the pump head and motor. The pump head has a combined 1/2" priming plug and vent screw.</p>  <p>The pump is fitted with a balanced O-ring seal unit with a rigid torque-transmission system. This seal type is assembled in a cartridge unit which makes replacement safe and easy. Due to the balancing, this seal type is suitable for high-pressure applications. The cartridge construction also protects the pump shaft from possible wear from a dynamic O-ring between pump shaft and shaft seal.</p> <p>Seal faces:</p> <ul style="list-style-type: none"> <li>Rotating seal ring material: silicon carbide (SiC)</li> <li>Stationary seat material: silicon carbide (SiC)</li> </ul> <p>This material pairing is used where higher corrosion resistance is required. The high hardness of this material pairing offers good resistance against abrasive particles.</p> <p>Secondary seal material: EPDM (ethylene-propylene rubber)</p> <p>EPDM has excellent resistance to hot water. EPDM is not suitable for mineral oils.</p>

## Qty. Description


1

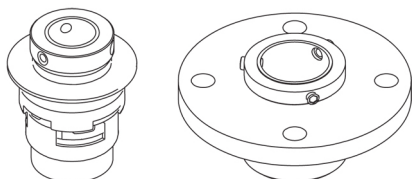

The shaft seal is retained in the pump head by a cover and screws. It can be replaced without removing the motor.

The chambers and impellers are made of stainless-steel sheet. The chambers are provided with a PTFE neck ring offering improved sealing and high efficiency. The impellers have smooth surfaces, and the shape of the blades ensure a high efficiency.

The base is made of cast iron. Both the inlet and the outlet side of the base have two pressure gauge tapings. The pump is secured to the foundation by four bolts through the base plate. The flanges are fastened to the base by means of locking rings.



### Motor

The motor is a totally enclosed, fan-cooled motor with principal dimensions to IEC and DIN standards. The motor is flange-mounted with free-hole flange (FF).

Motor-mounting designation in accordance with IEC 60034-7: IM B 5 (Code I) / IM 3001 (Code II).

Electrical tolerances comply with IEC 60034.

The motor efficiency is classified as IE5 in accordance with IEC 60034-30-2.

The motor requires no external motor protection. The motor control unit incorporates protection against slow- and quick-rising temperatures, e.g. constant overload and stalled conditions.

### Technical data

Liquid:

Pumped liquid: Water

Liquid temperature range: -22 .. 248 °F

Selected liquid temperature: 68 °F

Density: 62.29 lb/ft<sup>3</sup>

Technical:

Pump speed on which pump data are based: 3470 rpm

Rated flow: 159 US GPM

Rated head: 77.95 psi

Actual impeller diameter: 4.66 in

Pump orientation: Vertical

Shaft seal arrangement: Single

Code for shaft seal: HQQE

Approvals: CURUS

Approvals for drinking water: NSF/ANSI 61

Curve tolerance: ISO9906:2012 3B

Materials:

Base: Cast iron  
EN 1563 EN-GJS-500-7

ASTM A536 80-55-06

Impeller: Stainless steel



Company name:

Created by:


Phone:

Date:


10/10/2024

Qty.	Description
1	<div>EN 1.4301</div> <div>AISI 304</div> <div>Bearing: SIC</div> <div>Support bearing: Graflon</div> <div>Installation:</div> <div>Maximum ambient temperature: 122 °F</div> <div>Maximum operating pressure: 232.06 psi</div> <div>Max pressure at stated temp: 232 psi / 250 °F</div> <div>232 psi / -22 °F</div> <div>Type of connection: ANSI</div> <div>Size of inlet connection: 2 1/2 inch</div> <div>Size of outlet connection: 2 1/2 inch</div> <div>Pressure rating for connection: PN 16</div> <div>Flange rating inlet: 150 lb</div> <div>Flange size for motor: 213TC</div> <div>Electrical data:</div> <div>Motor standard: NEMA</div> <div>Motor type: 132F</div> <div>Rated power - P2: 10 HP</div> <div>Power (P2) required by pump: 10 HP</div> <div>Over/undersize motor: Standard motor size</div> <div>Mains frequency: 60 Hz</div> <div>Rated voltage: 3 x 440-480 V</div> <div>Service factor: 1.15</div> <div>Rated current: 12.4-11.5 A</div> <div>Cos phi - power factor: 0.91-0.90</div> <div>Rated speed: 360-4000 rpm</div> <div>IE Efficiency class: IE5</div> <div>Motor efficiency at full load: 92.5 %</div> <div>Enclosure class (IEC 34-5): IP55</div> <div>Insulation class (IEC 85): F</div> <div>Motor No: 99256776</div> <div>Controls:</div> <div>Frequency converter: Built-in</div> <div>Pressure sensor: Y</div> <div>Others:</div> <div>Terminal box position: 6</div> <div>DOE Pump Energy Index VL: 0.40</div> <div>Net weight: 220 lb</div> <div>Gross weight: 238 lb</div> <div>Shipping volume: 17.5 ft³</div> <div>Country of origin: US</div> <div>Custom tariff no.: 8413.70.2040</div>


## 99076527 CRE 32-3-2 N-G-A-E-HQQE 60 Hz

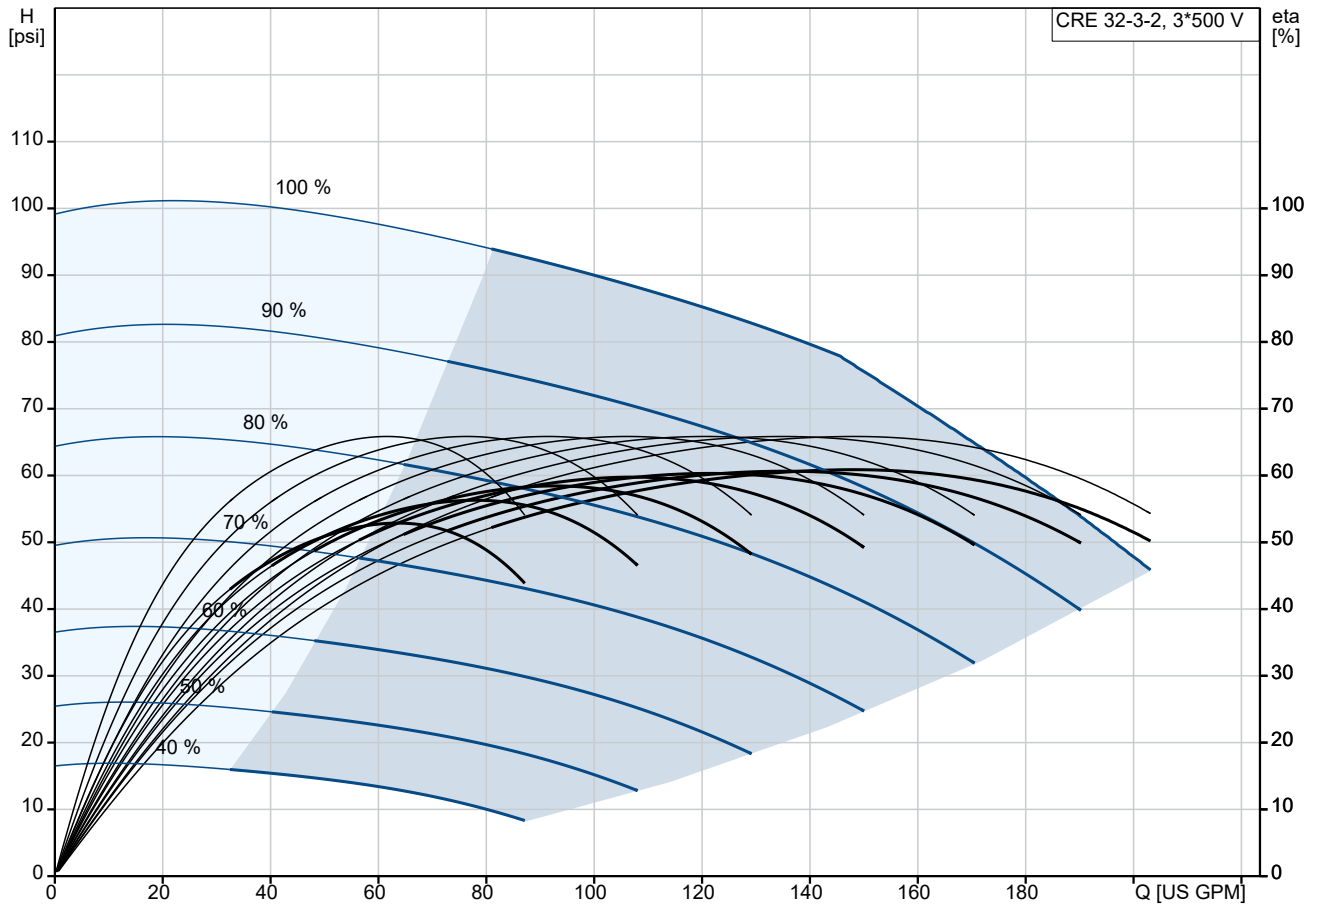




Pumped liquid = Water  
Liquid temperature during operation = 68 °F  
Density = 62.29 lb/ft³

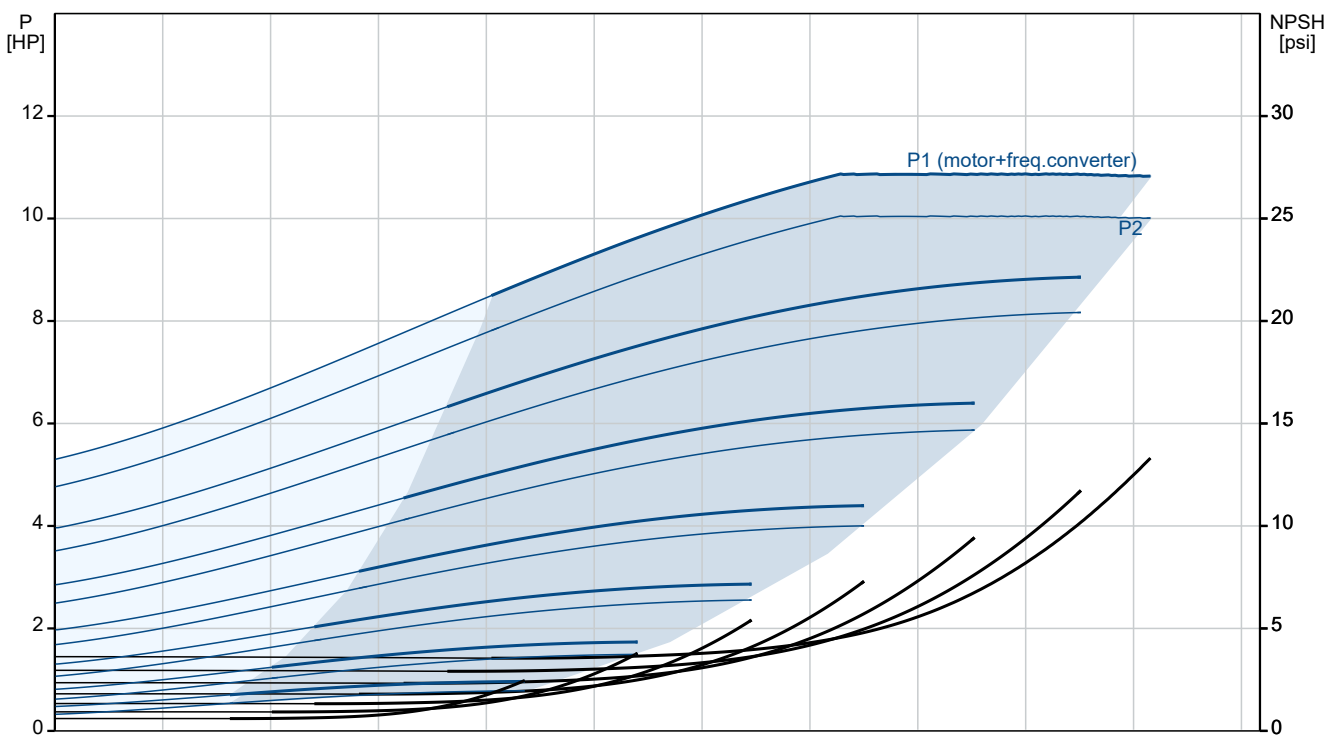

Description	Value
<b>General information:</b>	
Product name:	CRE 32-3-2 N-G-A-E-HQQE
Product No:	99076527
EAN number:	5712606285808
<b>Technical:</b>	
Pump speed on which pump data are based:	3470 rpm
Rated flow:	159 US GPM
Rated head:	77.95 psi
Maximum head:	104.5 psi
Actual impeller diameter:	4.66 in
Stages:	3
Impellers:	3
Number of reduced-diameter impellers:	2
Low NPSH:	N
Pump orientation:	Vertical
Shaft seal arrangement:	Single
Code for shaft seal:	HQQE
Approvals:	CURUS
Approvals for drinking water:	NSF/ANSI 61
Curve tolerance:	ISO9906:2012 3B
Pump version:	N
Model:	B
<b>Materials:</b>	
Base:	Cast iron
Base:	EN 1563 EN-GJS-500-7
Base:	ASTM A536 80-55-06
Impeller:	Stainless steel
Impeller:	EN 1.4301
Impeller:	AISI 304
Material code:	A
Code for rubber:	E
Bearing:	SIC
Support bearing:	Graflon
<b>Installation:</b>	
Maximum ambient temperature:	122 °F
Maximum operating pressure:	232.06 psi
Max pressure at stated temp:	232 psi / 250 °F
Max pressure at stated temp:	232 psi / -22 °F
Type of connection:	ANSI
Size of inlet connection:	2 1/2 inch
Size of outlet connection:	2 1/2 inch
Pressure rating for connection:	PN 16
Flange rating inlet:	150 lb
Flange size for motor:	213TC
Connect code:	G
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	-22 .. 248 °F
Selected liquid temperature:	68 °F
Density:	62.29 lb/ft³
<b>Electrical data:</b>	
Motor standard:	NEMA
Motor type:	132F
Rated power - P2:	10 HP
Power (P2) required by pump:	10 HP
Over/undersize motor:	Standard motor size

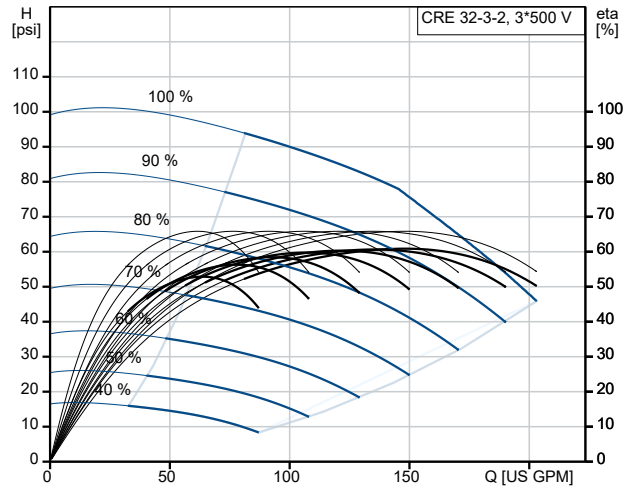

Pumped liquid = Water  
Liquid temperature during operation = 68 °F  
Density = 62.29 lb/ft³

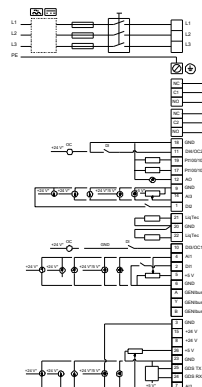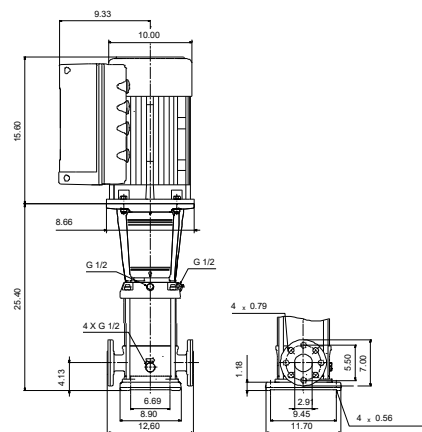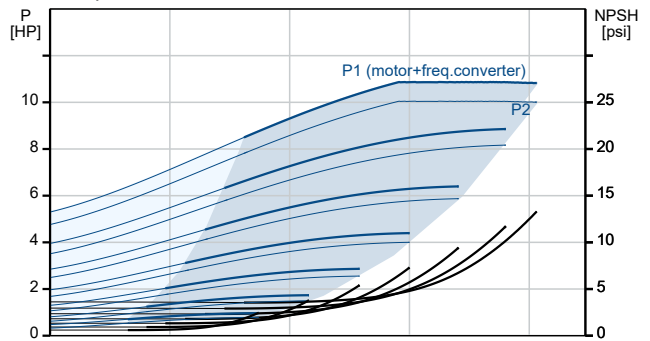





Company name:

Created by:


Phone:

Date:


10/10/2024

Description	Value
Mains frequency:	60 Hz
Rated voltage:	3 x 440-480 V
Service factor:	1.15
Rated current:	12.4-11.5 A
Cos phi - power factor:	0.91-0.90
Rated speed:	360-4000 rpm
IE Efficiency class:	IE5
Motor efficiency at full load:	92.5 %
Enclosure class (IEC 34-5):	IP55
Insulation class (IEC 85):	F
Built-in motor protection:	ELEC
Motor No:	99256776
<b>Controls:</b>	
Control panel:	Graphical
Function Module:	FM300 - Advanced
Frequency converter:	Built-in
Pressure sensor:	Y
<b>Others:</b>	
Terminal box position:	6
DOE Pump Energy Index VL:	0.40
Net weight:	220 lb
Gross weight:	238 lb
Shipping volume:	17.5 ft³
Config. file no:	99074286
Country of origin:	US
Custom tariff no.:	8413.70.2040

## 99076527 CRE 32-3-2 N-G-A-E-HQQE 60 Hz

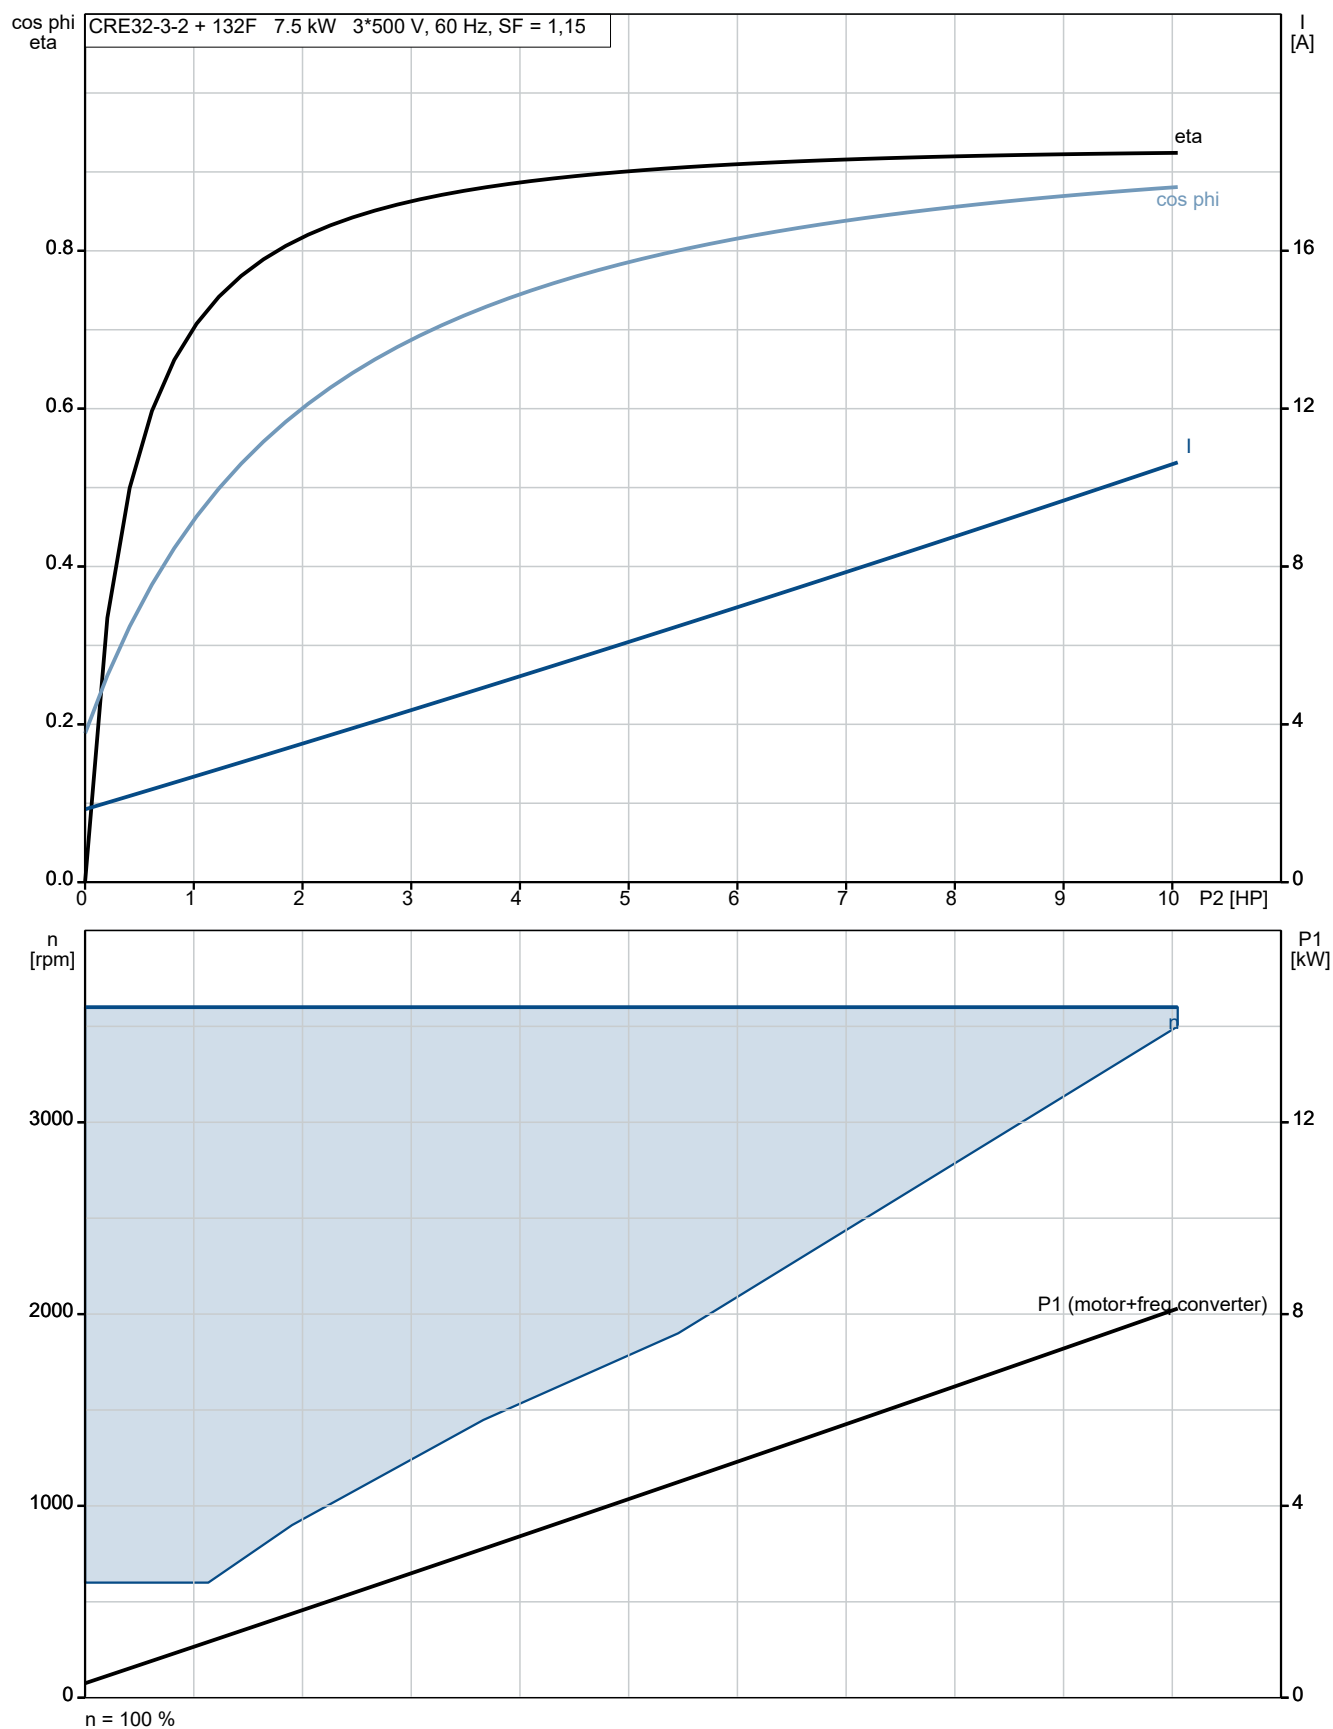


## 99076527 CRE 32-3-2 N-G-A-E-HQQE 60 Hz

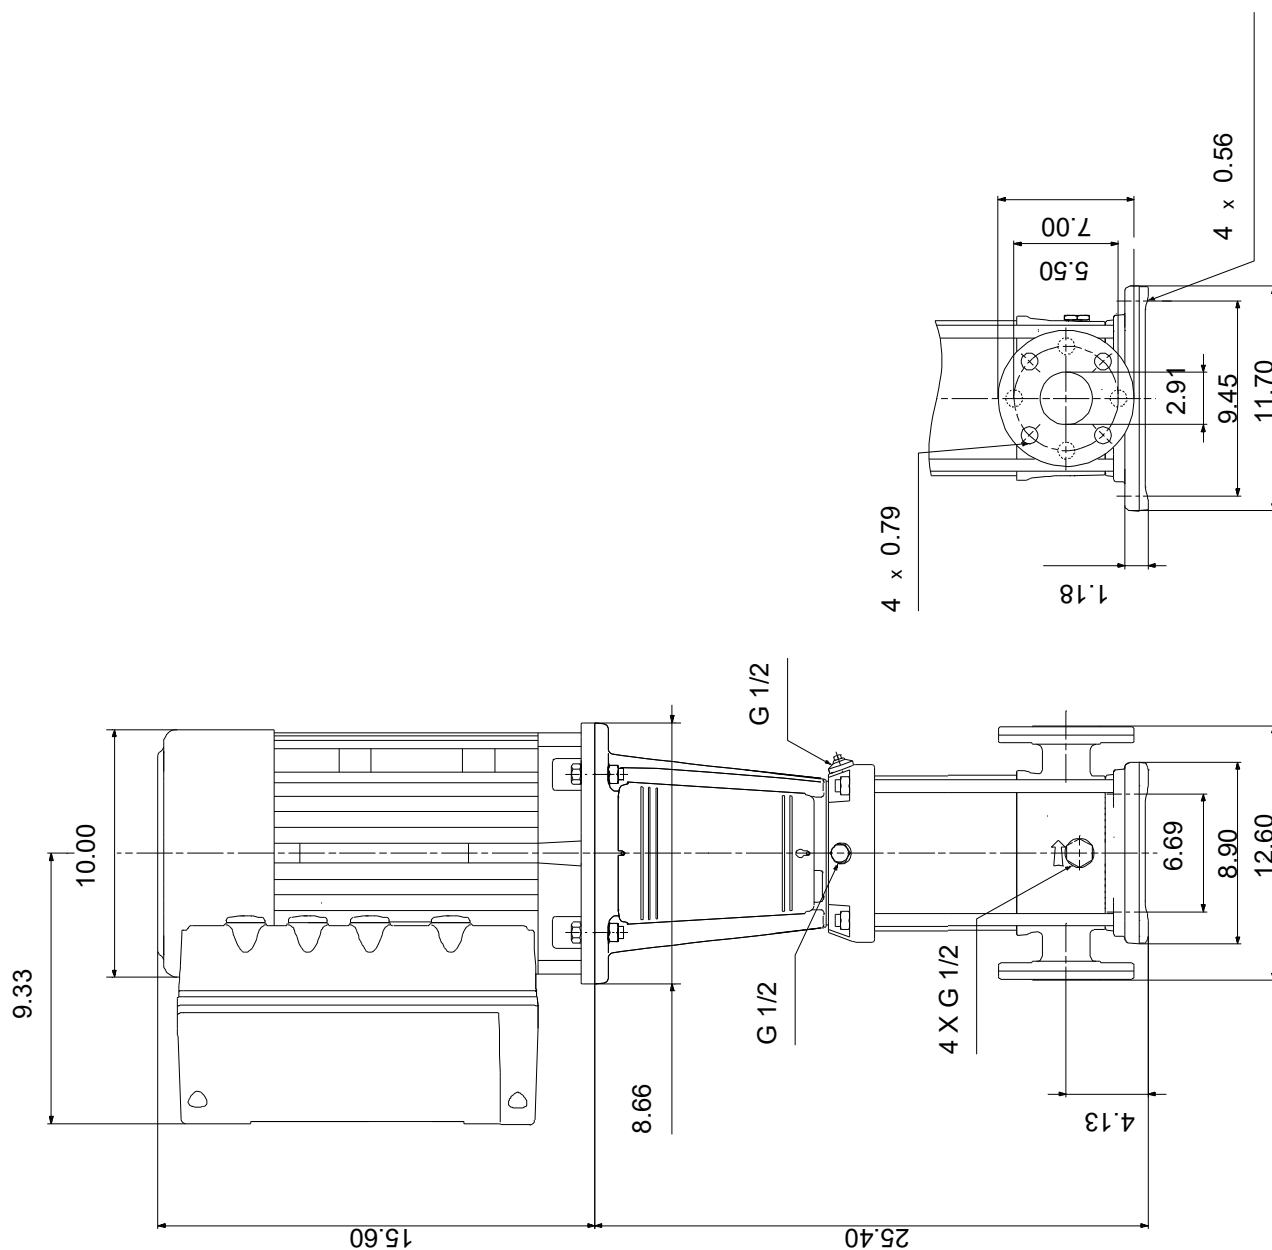

Note! All units are in [in] unless others are stated.

Disclaimer: This simplified dimensional drawing does not show all details.

## 99076527 CRE 32-3-2 N-G-A-E-HQQE 60 Hz

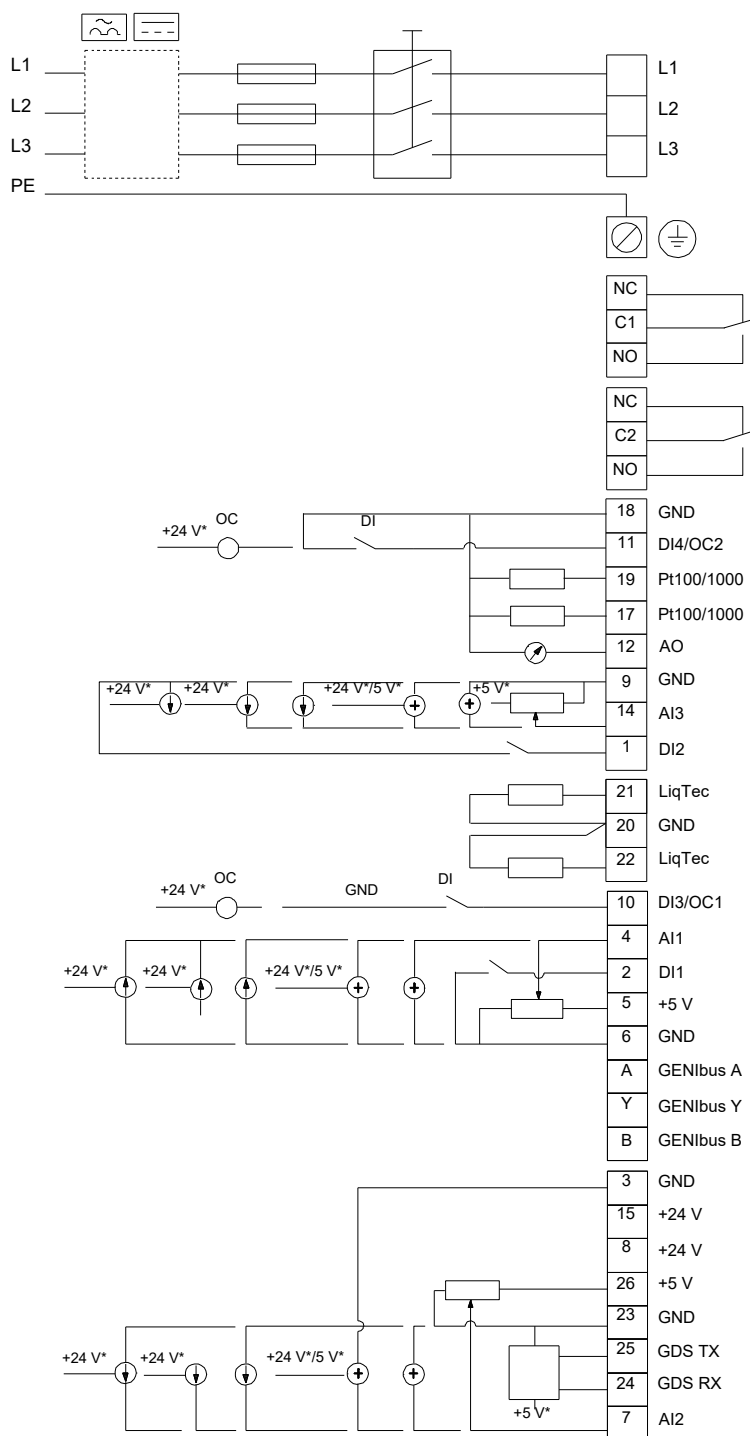

Note! All units are in [in] unless others are stated.