



Customer information packet

SPM4410TR-4

125HP, 1790RPM, 3PH, 60HZ, 444T, A4480M, TEFC

PFC EQUIPMENT INC

Class - CLI GP A,B,C,D; CLII GP F,G

Division - Division II

Specifications

Enclosure	TEFC
Frame	444T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CLI GP A,B,C,D; CLII GP F,G
Haz Area Division	Division II
Motor Letter Type	Three Phase
Output @ Frequency	125.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	CCSAUSEEV CURUSEEV NEMA PREMIUM NEMA_PREMIUM
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Base Indicator	Rigid
Bearing Grease Type	Mobil SHC 220 (Athens Only)
Current @ Voltage	142.000 A @ 460.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	96.2 %
Feedback Device	NO FEEDBACK
Heater Indicator	No Heater
High Voltage Full Load Amps	142.0 a
Insulation Class	F
Inverter Code	Inverter Duty
KVA Code	H
Lifting Lugs	Standard Lifting Lugs
Max Speed	2700 rpm

Part detail

Revision	B
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	A44WG6731
Layout	617439-171
Eff. date	08-22-2024
CD Diagram	416820-036
Poles	04
Leads	3#2 Y
Proprietary	False
Created date	09-15-2023

Motor Lead Quantity/Wire Size	3 @ 2 AWG
Motor Standards	NEMA
Motor Type	A4480M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	44.97 IN
Power Factor	86
Product Family	General Industrial
Pulley End Bearing Type	Roller
Pulley Face Code	Standard
Service Factor	1.15
Shaft Diameter	3.375 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1790 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None

Nameplate

NP2496L	
MOBIL SHC -220 GREASE	

NP4562L


CAT NO	SPM4410TR-4	SPEC NO.	A44-5000-6731	I.P.	55					
HP	125	AMPS	142	VOLTS	460	DESIGN	A			
FRAME SIZE	444T	RPM	1790	MAX RPM	2700	HZ	60	AMB	40	°C
D.E. BRG.	110RU02M30X	PH.3	3	DUTY	CONT	INSUL.CLASS	F			
O.D.E. BRG.	90BC03J30X	TYPE P	P	ENCL	TEFC	SF	1.15	CODE	H	
POWER FACTOR	86	MAX CORR KVAR	25.8	NEMA NOM EFFICIENCY	96.2	MOTOR WEIGHT		LBS		
CL.I,DIV 2,GRP:	A,B,C,D	T.CODE	T3C	CL.1,ZONE 2,GRP:	IIA,IIB,IIC	T=	160	°C	INVERTER T.CODE	T3
CL.II,DIV 2,GRP:	F,G	T.CODE	T3C	CL II ZONE 22 GRPS IIIB	T=	160	°C	INVERTER T.CODE	T3	
ID LOGO	INV TYPE:	VPWM	CT	30	TO	60	VT	3	TO	60
ID LOGO	1.0 SF VPWM	WK2	52.8	LBFT2	SL HZ	0.3	MAG CUR	48		
SER.NO.				MEETS INTENT OF IEEE-45	FOR WEATHER PROTECTION					


Parts list

Part number	Description	Quantity
SA420270	SA A44-5000-6731	1.000 ea
RA412229	RA A44-5000-6731	1.000 ea
421948051	LABEL, MYLAR	1.000 ea
NP2496L	MOTOR LUBE NAMEPLATE	1.000 ea
000692000VD	LABEL WARNING	1.000 ea
NP4562L	SS,SUPER PREM,CL.II DIV 2,MAIN,NEMA PREM	1.000 ea
HW4506A02	BREATHER/DRAIN-EXP PROOF-.125-27 NPTF AI	2.000 ea
089490099AA	G28 BRKT 089490098WCA	1.000 ea
415072001B	CLAMP	1.000 ea
083199082A	G28 FAN COVER MACHINING SHORT VERSION	1.000 ea
034180014DA	KEY 1/4X1/4X1-3/4 L	1.000 ea
078550001H	FAN KB 120/60 360	1.000 ea
004824015AP	GREASE MOBILITH SHC 220	1.160 lb
032018020FK	HHCS 3/4-10X2-1/2 PLTD.	4.000 ea
032018008CK	HHCS 3/8-16X1L PLATED	4.000 ea
032018030DK	HHCS 1/2-13X3-3/4 PLTD.	3.000 ea
415044053AX	SLINGER,DE 6318 G440	1.000 ea
418151014G	RETAIN RING	1.000 ea
034017014AB	LCKW 3/8 STD. PLATED	4.000 ea
034530064AB	P/NIP 1/8 X 8" L Pipe Nipple	1.000 ea
415096002A	CPLG 1/8 HEX TYPE	1.000 ea
034690005AB	PPLG 3/4 PLATED	1.000 ea
032620016KB	HSRSS; 1/4X1/2	2.000 ea
034530064BB	P/NIP 1/4X8 PLATED	1.000 ea
034631002AB	BUSH 1/4 TO 1/8 PLTD.	1.000 ea
035000001G	GREASE RELIEF FITTING, ALEMITE 317400	1.000 ea
032620016LA	SOCKET SET SCREW-449	3.000 ea
418151014H	RETAIN RING	1.000 ea
034631002AB	BUSH 1/4 TO 1/8 PLTD.	1.000 ea
034530036BB	P/NIP 1/4X4-1/2 GALV.	1.000 ea
035000001G	GREASE RELIEF FITTING, ALEMITE 317400	1.000 ea

702623013A	THERMAL BARRIER -- G28 -- BRACKET MTD	1.000 ea
032018004BK	HHCS 5/16-18X1/2 PLATED	1.000 ea
034017013AB	LCKW 5/16 STD. PLATED	1.000 ea
089490101M	G28 BRKT 089490100WCA	1.000 ea
032018020FK	HHCS 3/4-10X2-1/2 PLTD.	4.000 ea
032018030DK	HHCS 1/2-13X3-3/4 PLTD.	3.000 ea
415044054AX	SLINGER,DE NU222 G440	1.000 ea
034530036AB	P/NIP 1/8 X4-1/2 Yellow Zinc46114-BM	1.000 ea
415096002A	CPLG 1/8 HEX TYPE	1.000 ea
415030009AX	BUSH	1.000 ea
415915007G	GASK, LAC	1.000 ft
076863000C	+CBCST BLKT - 440	1.000 ea
406056007A	GASKET, 440	1.000 ea
076864000A	CBCST BLKT - 440	1.000 ea
067053001C	GASK 440	1.000 ea
418150003A	GREASE FITTING CAP	1.000 ea
MG1050Y01	CELEROL BALDOR GOLD *** NLA IN 5 GALLON	0.440 ga
032018008BK	HHCS 5/16-18X1L PLATED	4.000 ea
032018008DK	HHCS 1/2-13X1 PLATED	4.000 ea
035000001A	ALFTG 1/8" 1610-BL	1.000 ea
415000115H	T/LUG #2AWG-4/0AWG	1.000 ea
406099000A	PLUG - FAN COVER 320-440	1.000 ea
032018005DL	1/2-13 X 5/8 SILICON BRONZE HHCS	1.000 ea
035000001A	ALFTG 1/8" 1610-BL	1.000 ea
418150003A	GREASE FITTING CAP	1.000 ea
033775004EA	DRSCR #6-1/4 304 S.S.	2.000 ea
034180054KA	7/8 SQ X 6.75 KEY	1.000 ea
604797045	STD. 400 FRAME SKID	1.000 ea
032510024D	CARRIAGE BOLT - 444	2.000 ea
034001016AB	WSHR .562ID 1.375OD .109	2.000 ea
034001014AB	FLAT WASHER 3/8"PLATED	2.000 ea
000692000RT	N/P	1.000 ea
LB1636	LABEL, SUPER PREMIUM SP4, 1.75 X 1.75	1.000 ea
033300014AC	HEX NUT, SHIPPING - 400	2.000 ea

604799003C	PLASTIC BAG 42X32X46	1.000 ea
604797001R	440 FR. ROLLER BEARING MOTOR SHAFT	1.000 ea
032018028CK	HHCS 3/8-16X3-1/2 PLTD.	1.000 ea
034001016AB	WSHR .562ID 1.375OD .109	1.000 ea
034001014AB	FLAT WASHER 3/8"PLATED	1.000 ea

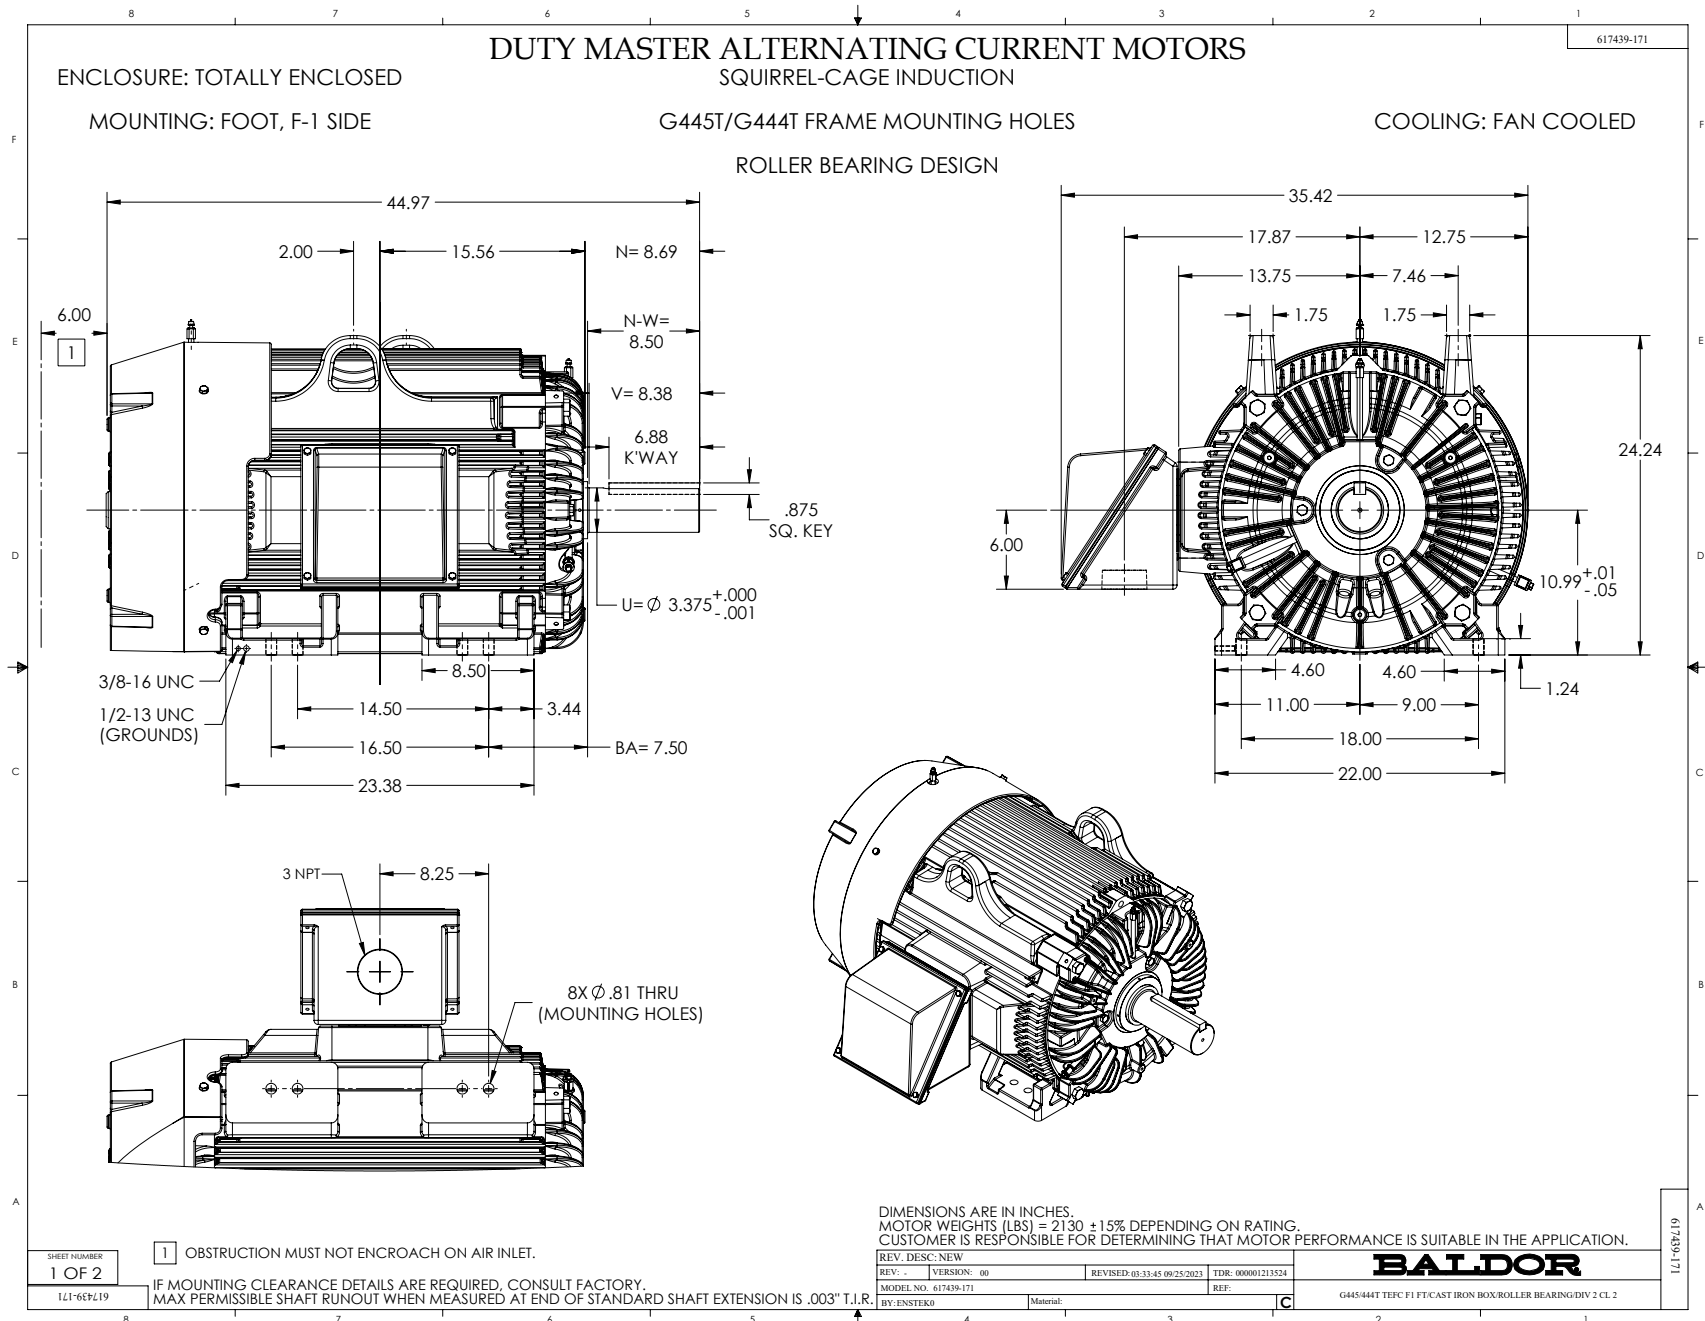

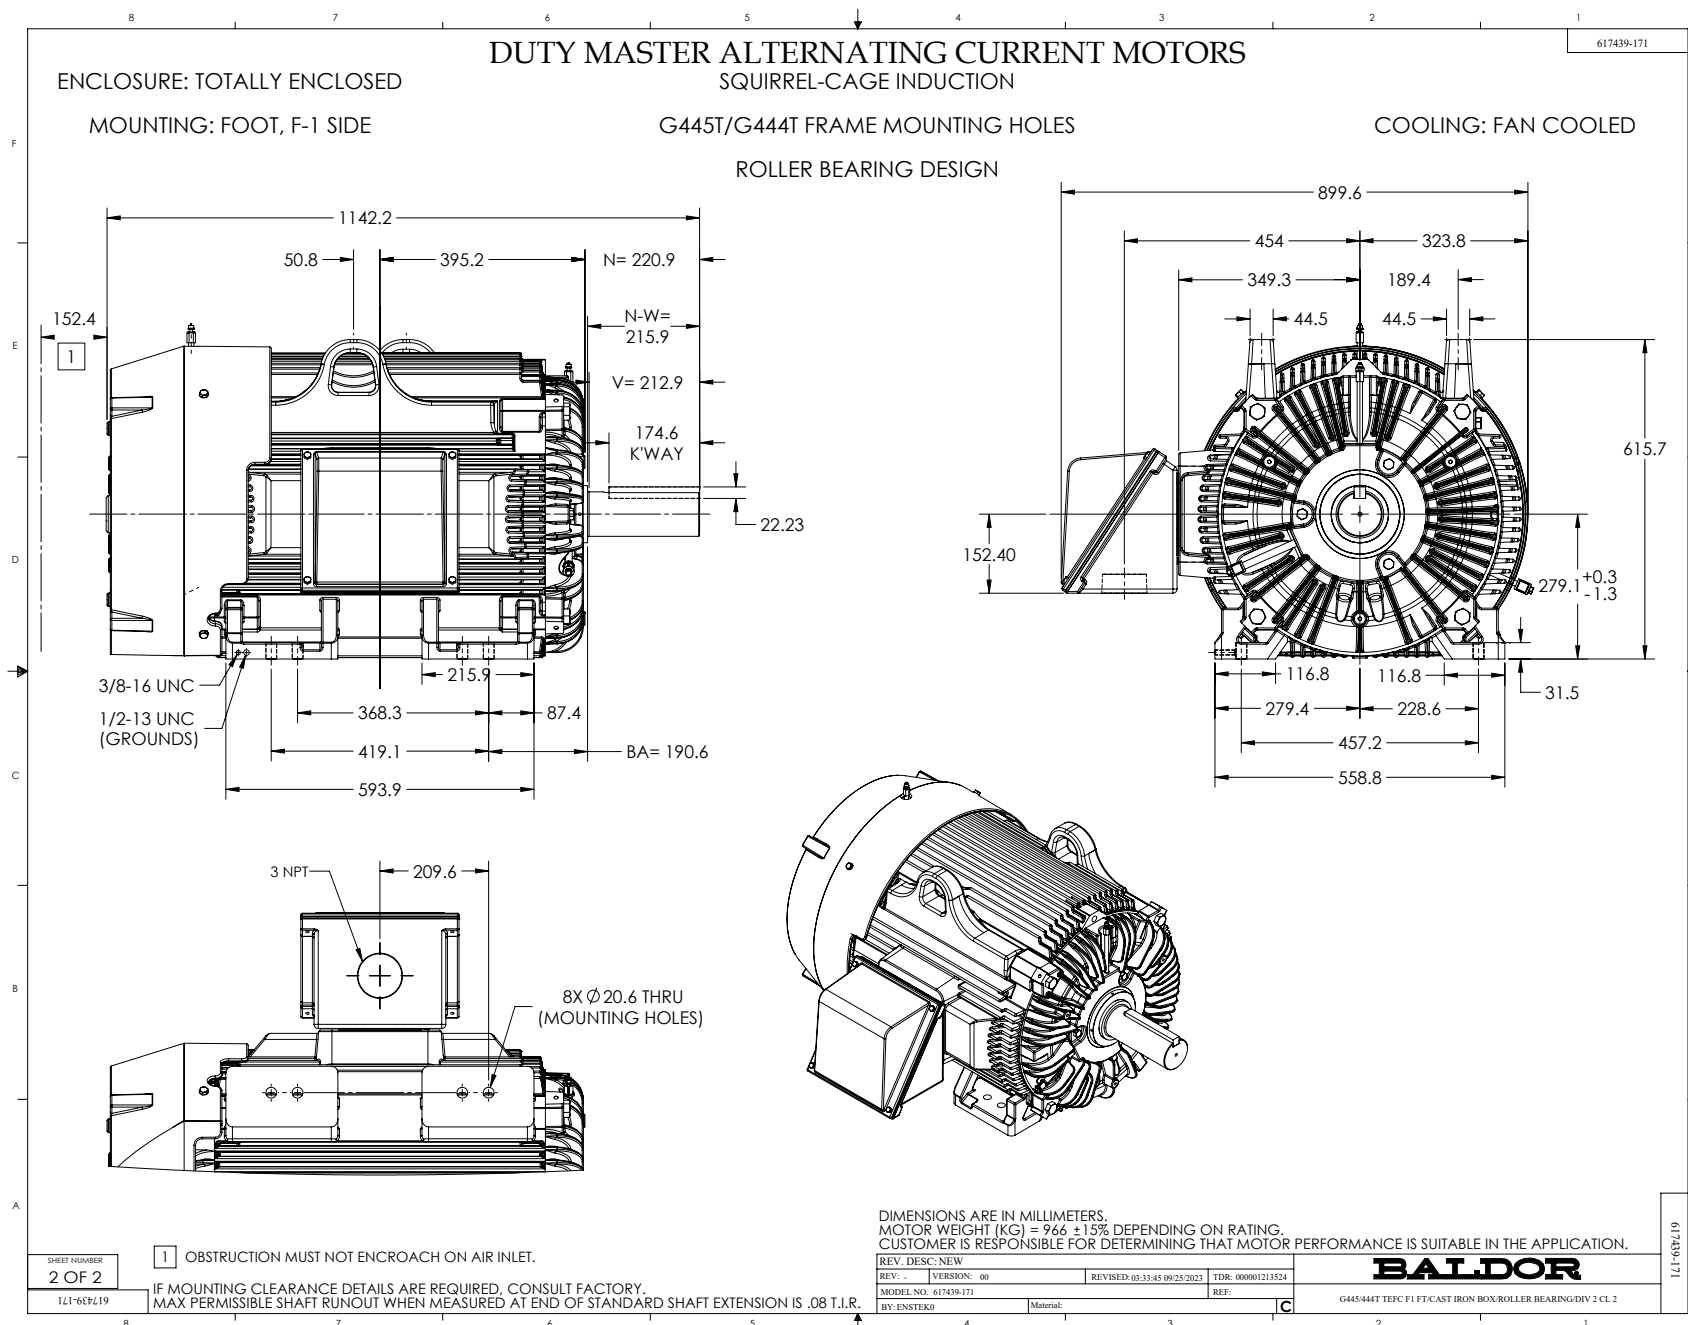

CONNECTION DIAGRAM
ACCESSORIES

MOTOR WINDING THERMOSTATS		
CONTACTS _____ @ _____ °C		
FIGURE NUMBER _____		
CONTACT RATING		
VOLTS	CONTINUOUS AMPERES	INRUSH AMPERES
110-120	3.0	30
220-240	1.5	15
440-480	0.75	7.5
550-600	0.60	6.0

THERMOSTATS	
NORMALLY CLOSED	NORMALLY OPEN
FIGURE 1	FIGURE 4
FIGURE 2	FIGURE 5
FIGURE 3	FIGURE 6
FIGURE 7	FIGURE 8

CUSTOMER _____ S.O. NO. _____
ORDER NO. _____

REV. DESC: LOADED TO BUS		
REV. LTR: A	VERSION: 01	TDR: 000000570390
FILE: \RAG\00013\849	REVISED: 10:16:21 12/07/2010	BY: RAGDRF
MTL: -		

BALDOR

A-C MOTOR CONNECTION ACCESSORIES


SH 1 of 1

418174-006

418174-006

416820-036

A-C MOTOR
CONNECTION DIAGRAM
STANDARD 3 LEAD CONNECTED

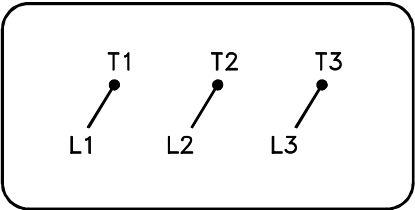

(N.P. 1575-BA)

416820-036

REV. DESC: LOADED TO BUS, C/R 335225		
REV. LTR: -	VERSION: 00	TDR: 000000538207
FILE: \MGA\00000\682	REVISED: 11: 54: 06 04/30/2010	
MTL: -	BY: RAGRA	

BALDOR

CONN DIAG - STANDARD 3 LEAD
SH 1 of 1