## **Submittal Data**

| PROJECT:        | UNIT TAG:        | QUANTITY: |  |
|-----------------|------------------|-----------|--|
|                 | TYPE OF SERVICE: |           |  |
| REPRESENTATIVE: | SUBMITTED BY:    | DATE:     |  |
| ENGINEER:       | APPROVED BY:     | DATE:     |  |
| CONTRACTOR:     | ORDER NO.:       | DATE:     |  |



### Note! Product picture may differ from actual product


## CR 3-6 A-B-A-V-HQQV

Vertical, multistage centrifugal pump with suction and discharge ports on the same level. The pump head and base are in cast iron - all other wetted parts are in stainless steel (EN 1.4301)

| Conditions of Service   |                | Pump Data   |                  |  |
|-------------------------|----------------|---|------------------|--|
| Liquid:<br>Temperature: | Water<br>68 °F | Max pressure at stated temp:<br>Liquid temperature range: | 232 psi / 194 °F |  |
| Specific Gravity:       |                | Shaft seal:   | -4 194 F<br>HQQV |  |
|                         |                | Product number:   | 96083115         |  |


Motor Data


Mains frequency: 60 Hz

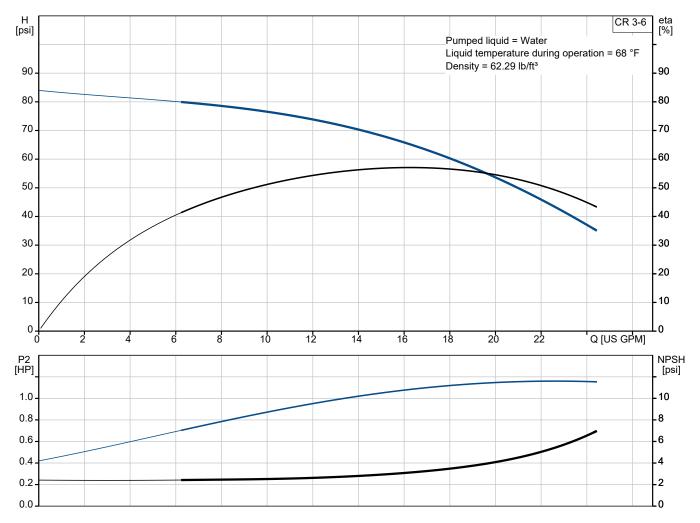

1

## **Submittal Data**

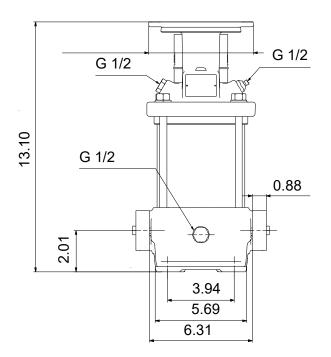

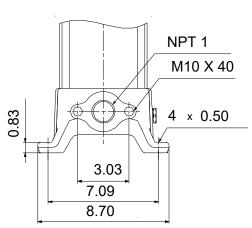

Materials:

Base: Cast iron

EN 1561 EN-GJL-200

**ASTM A48-25B** 

Impeller:

Stainless steel

AISI 304

EN 1.4301

Material code: A Code for rubber: V



**Date:** 08/05/2025

Qty. | Description

1 CR 3-6 A-B-A-V-HQQV



Note! Product picture may differ from actual product

Product No.: 96083115
Pump without motor

Vertical, multistage centrifugal pump with inlet and outlet ports on same the level (inline). The pump head and base are in cast iron – all other wetted parts are in stainless steel. A cartridge shaft seal ensures high reliability, safe handling, and easy access and service. Power transmission is via a rigid split coupling. Pipe connection is via oval flanges with internal NPT threads.

### Further product details

Steel, cast iron and aluminium components have an epoxy-based coating made in a cathodic electro-deposition (CED) process.

CED is a high-quality dip-painting process where an electrical field around the products ensures deposition of paint particles as a thin, well-controlled layer on the surface.

An integral part of the process is a pretreatment.


The entire process consists of these elements:

- 1) Alkaline-based cleaning.
- 2) Zinc phosphating.
- 3) Cathodic electro-deposition.
- 4) Curing to a dry film thickness 18-22 my m.

The colour code for the finished product is NCS 9000/RAL 9005.

### **Pump**

The pump head, pump head cover and flange for motor mounting is made in one piece. The pump head has a combined 1/2" priming plug and vent screw.



The pump is fitted with a balanced O-ring seal unit with a rigid torque-transmission system.

This seal type is assembled in a cartridge unit which makes replacement safe and easy.

Due to the balancing, this seal type is suitable for high-pressure applications.

The cartridge construction also protects the pump shaft from possible wear from a dynamic O-ring between pump shaft and shaft seal.

#### Seal faces:

- Rotating seal ring material: silicon carbide (SiC)
- Stationary seat material: silicon carbide (SiC)

This material pairing is used where higher corrosion resistance is required. The high hardness of this material pairing offers good resistance against abrasive particles.

Secondary seal material: FKM (fluorocarbon rubber)

FKM has excellent resistance to oils and chemicals. Above 90 °C, FKM should only be used in media without water.



**Date:** 08/05/2025

### Qty. | Description


1



The shaft seal is screwed into the pump head.

The chambers and impellers are made of stainless-steel sheet. The chambers are provided with a PTFE neck ring offering improved sealing and high efficiency. The impellers have smooth surfaces, and the shape of the blades ensure a high efficiency.

The base is made of cast iron. The oval flanges are bolted to the base. The outlet side of the base has a combined drain plug and bypass valve. The pump is secured to the foundation by four bolts through the base plate.



#### Motor

The pump is sold without motor.

#### **Technical data**

Liquid:

Pumped liquid: Water
Liquid temperature range: -4 .. 194 °F
Selected liquid temperature: 68 °F
Density: 62.29 lb/ft³

Technical:

Pump speed on which pump data are based: 3484 rpm

Rated flow: 15.4 US GPM
Rated head: 59.49 psi
Pump orientation: Vertical
Shaft seal arrangement: Single
Primary shaft seal: HQQV
Code for shaft seal: HQQV
Approvals: CE

Curve tolerance: ISO9906:2012 3B

Materials:

Base: Cast iron

EN 1561 EN-GJL-200 ASTM A48-25B

Impeller: Stainless steel

EN 1.4301 AISI 304

Bearing: SIC

Installation:

Maximum operating pressure: 232.06 psi
Max pressure at stated temp: 232 psi / 194 °F



**Date:** 08/05/2025

Qty. | Description

1 232 psi / -4 °F

Type of connection: Oval / NPT(F)

Size of inlet connection: 1 inch
Size of outlet connection: 1 inch
Pressure rating for connection: PN 16
Flange size for motor: 56C

Electrical data:

Motor standard: NEMA
Power (P2) required by pump: 1 HP

Controls:

Frequency converter: None

Others:


Net weight: 32.6 lb
Gross weight: 43.6 lb
Shipping volume: 4.94 ft³
Country of origin: US

Custom tariff no.: 8413.70.2040




**Date:** 08/05/2025

## 96083115 CR 3-6 A-B-A-V-HQQV 60 Hz

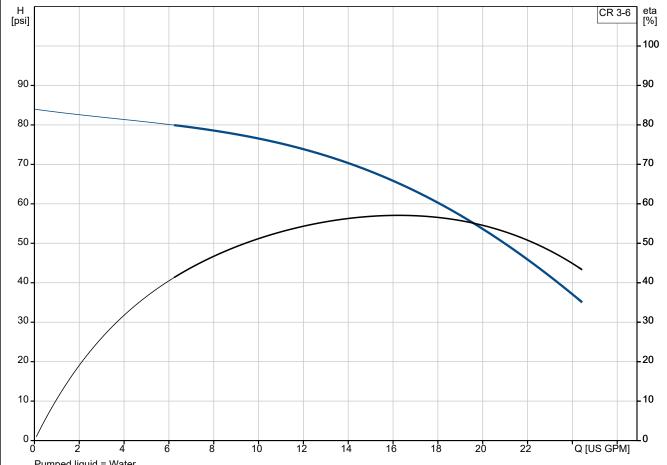


Pumped liquid = Water Liquid temperature during operation = 68 °F

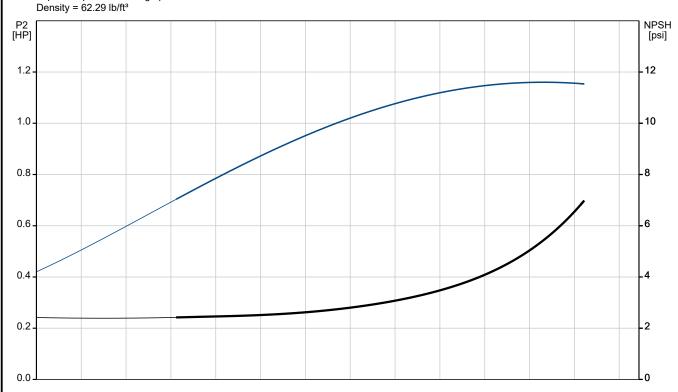





**Date:** 08/05/2025

| Description                              | Value               |
|--|---------------------|
| General information:                     |                     |
| Product name:                            | CR 3-6 A-B-A-V-HQQV |
| Product No:                              | 96083115            |
| EAN number:                              | 5700395182835       |
| Technical:                               |                     |
| Pump speed on which pump data are based: | 3484 rpm            |
| Rated flow:                              | 15.4 US GPM         |
| Rated head:                              | 59.49 psi           |
| Maximum head:                            | 80.93 psi           |
| Stages:                                  | 6                   |
| Impellers:                               | 6                   |
| Number of reduced-diameter impellers:    | 0                   |
| Low NPSH:                                | N                   |
| Pump orientation:                        | Vertical            |
| Shaft seal arrangement:                  | Single              |
| Primary shaft seal:                      | HQQV                |
| Code for shaft seal:                     | HQQV                |
| Approvals:                               | CE                  |
| Curve tolerance:                         | ISO9906:2012 3B     |
| Pump version:                            | A                   |
| Model:                                   | A                   |
| Materials:                               | <u> </u>            |
| Base:                                    | Cast iron           |
| base.                                    | EN 1561 EN-GJL-200  |
|  |                     |
|  | ASTM A48-25B        |
| Impeller:                                | Stainless steel     |
|  | EN 1.4301           |
|  | AISI 304            |
| Material code:                           | Α                   |
| Code for rubber:                         | V                   |
| Bearing:                                 | SIC                 |
| Installation:                            |                     |
| Maximum operating pressure:              | 232.06 psi          |
| Max pressure at stated temp:             | 232 psi / 194 °F    |
|  | 232 psi / -4 °F     |
| Type of connection:                      | Oval / NPT(F)       |
| Size of inlet connection:                | 1 inch              |
| Size of outlet connection:               | 1 inch              |
| Pressure rating for connection:          | PN 16               |
| Flange size for motor:                   | 56C                 |
| Connect code:                            | В                   |
| Liquid:                                  |                     |
| Pumped liquid:                           | Water               |
| Liquid temperature range:                | -4 194 °F           |
| Selected liquid temperature:             | 68 °F               |
| Density:                                 | 62.29 lb/ft³        |
| Electrical data:                         | 02.29 ID/IL         |
|  | NITNAA              |
| Motor standard:                          | NEMA                |
| Power (P2) required by pump:             | 1 HP                |
| Controls:                                |                     |
| Frequency converter:                     | None                |
| Others:                                  |                     |
| Net weight:                              | 32.6 lb             |
| Gross weight:                            | 43.6 lb             |
| Shipping volume:                         | 4.94 ft³            |
|  | US                  |

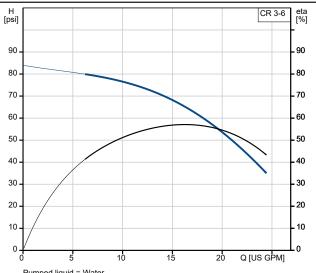

Pumped liquid = Water Liquid temperature during operation = 68 °F Density = 62.29 lb/ft³

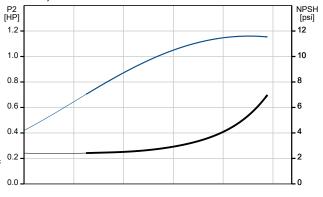

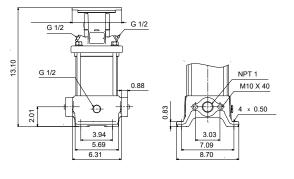





|                    |              | Date: | 08/05/2025 |
|--------------------|--------------|-------|------------|
| Description        | Value        |       |            |
| Custom tariff no.: | 8413.70.2040 |       |            |
|                    | 0.1011012010 |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |
|                    |              |       |            |



08/05/2025 Date:

# 96083115 CR 3-6 A-B-A-V-HQQV 60 Hz

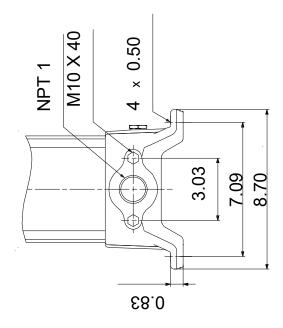

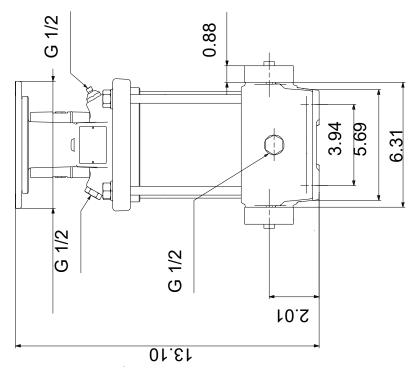

Note! All units are in [in] unless others are stated. Disclaimer: This simplified dimensional drawing does not show all details.