Submittal Data

PROJECT:	UNIT TAG:	QUANTITY:	
	TYPE OF SERVICE:		
REPRESENTATIVE:	SUBMITTED BY:	DATE:	
ENGINEER:	APPROVED BY:	DATE:	
CONTRACTOR:	ORDER NO.:	DATE:	



Note! Product picture may differ from actual product


CR 3-11 A-FGJ-A-V-HQQV

Vertical, multistage centrifugal pump with suction and discharge ports on the same level. The pump head and base are in cast iron - all other wetted parts are in stainless steel (EN 1.4301)

Conditions of Service		Pump Data	
Liquid:	Water	Max pressure at stated temp:	363 psi / 194 °F
Temperature:	68 °F	Liquid temperature range:	-4 194 °F
Specific Gravity:	1.000	Shaft seal:	HQQV
		Product number:	96083280


Motor Data

Mains frequency: 60 Hz

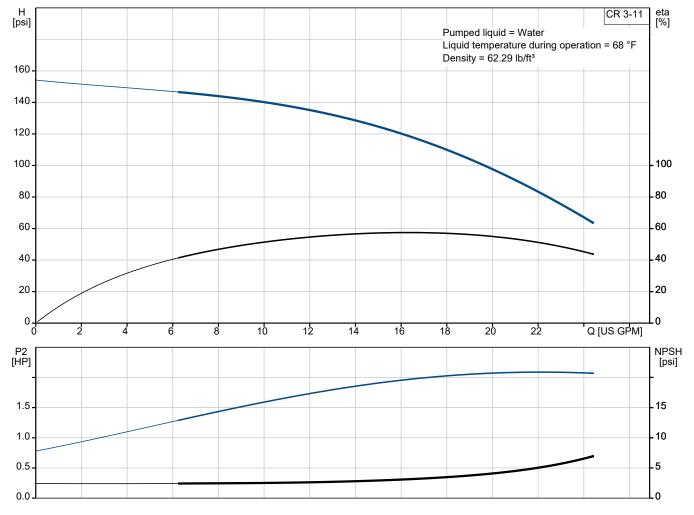

1

Submittal Data

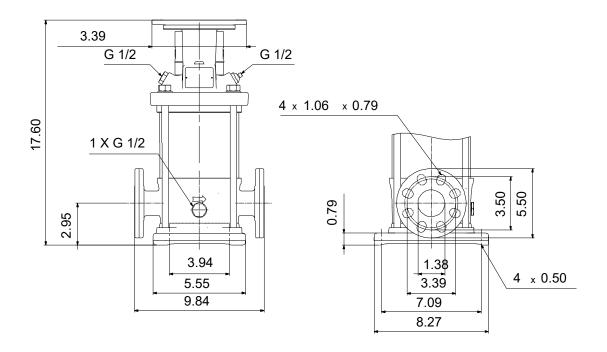

Materials:

Base: Cast iron

EN 1561 EN-GJL-200

ASTM A48-25B

Impeller: Stainless steel

AISI 304

EN 1.4301

Material code: A Code for rubber: V



Date: 22/05/2025

Qty. | Description

1 | CR 3-11 A-FGJ-A-V-HQQV



Note! Product picture may differ from actual product

Product No.: 96083280 Pump without motor

Vertical, multistage centrifugal pump with inlet and outlet ports on same the level (inline). The pump head and base are in cast iron – all other wetted parts are in stainless steel. A cartridge shaft seal ensures high reliability, safe handling, and easy access and service. Power transmission is via a rigid split coupling. Pipe connection is via combined DIN-ANSI-JIS flanges.

Further product details

Steel, cast iron and aluminium components have an epoxy-based coating made in a cathodic electro-deposition (CED) process.

CED is a high-quality dip-painting process where an electrical field around the products ensures deposition of paint particles as a thin, well-controlled layer on the surface.

An integral part of the process is a pretreatment.


The entire process consists of these elements:

- 1) Alkaline-based cleaning.
- 2) Zinc phosphating.
- 3) Cathodic electro-deposition.
- 4) Curing to a dry film thickness 18-22 my m.

The colour code for the finished product is NCS 9000/RAL 9005.

Pump

The pump head, pump head cover and flange for motor mounting is made in one piece. The pump head has a combined 1/2" priming plug and vent screw.



The pump is fitted with a balanced O-ring seal unit with a rigid torque-transmission system.

This seal type is assembled in a cartridge unit which makes replacement safe and easy.

Due to the balancing, this seal type is suitable for high-pressure applications.

The cartridge construction also protects the pump shaft from possible wear from a dynamic O-ring between pump shaft and shaft seal.

Seal faces:

- Rotating seal ring material: silicon carbide (SiC)
- Stationary seat material: silicon carbide (SiC)

This material pairing is used where higher corrosion resistance is required. The high hardness of this material pairing offers good resistance against abrasive particles.

Secondary seal material: FKM (fluorocarbon rubber)

FKM has excellent resistance to oils and chemicals. Above 90 °C, FKM should only be used in media without water.



Date: 22/05/2025

Qty. | Description


1



The shaft seal is screwed into the pump head.

The chambers and impellers are made of stainless-steel sheet. The chambers are provided with a PTFE neck ring offering improved sealing and high efficiency. The impellers have smooth surfaces, and the shape of the blades ensure a high efficiency.

The base is made of cast iron. The flanges and base are cast in one piece. The outlet side of the base has a combined drain plug and bypass valve. The pump is secured to the foundation by four bolts through the base plate.



Motor

The pump is sold without motor.

Technical data

Liquid:

Pumped liquid: Water
Liquid temperature range: -4 .. 194 °F
Selected liquid temperature: 68 °F
Density: 62.29 lb/ft³

Technical:

Pump speed on which pump data are based: 3452 rpm

Rated flow: 15.4 US GPM
Rated head: 108.9 psi
Pump orientation: Vertical
Shaft seal arrangement: Single
Primary shaft seal: HQQV
Code for shaft seal: HQQV
Approvals: CE

Curve tolerance: ISO9906:2012 3B

Materials:

Base: Cast iron

EN 1561 EN-GJL-200

ASTM A48-25B Stainless steel

Impeller: Stainless stee

EN 1.4301 AISI 304

Bearing: SIC

Installation:

Maximum operating pressure: 362.59 psi
Max pressure at stated temp: 363 psi / 194 °F



Date: 22/05/2025

Qty. | Description

1 363 psi / -4 °F

Type of connection: DIN / ANSI / JIS

DN 25/32 1 1/4 inch

Size of outlet connection: DN 25/32

1 1/4 inch

Pressure rating for connection: PN 25
Flange rating inlet: 250 lb
Flange size for motor: 56C

Electrical data:

Size of inlet connection:

Motor standard: NEMA
Power (P2) required by pump: 2 HP

Controls:

Frequency converter: None

Others:


Net weight: 47.1 lb Gross weight: 61.6 lb Shipping volume: 4.94 ft³ Country of origin: US

Custom tariff no.: 8413.70.2040



22/05/2025 Date:


96083280 CR 3-11 A-FGJ-A-V-HQQV 60 Hz

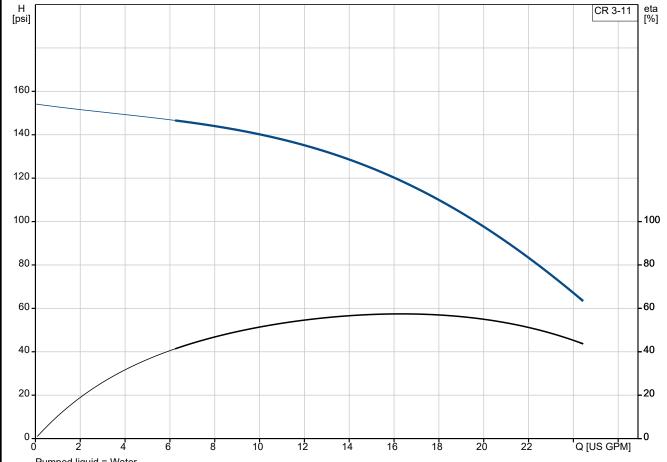

Pumped liquid = Water

Liquid temperature during operation = 68 °F


Density = 62.29 lb/ft³

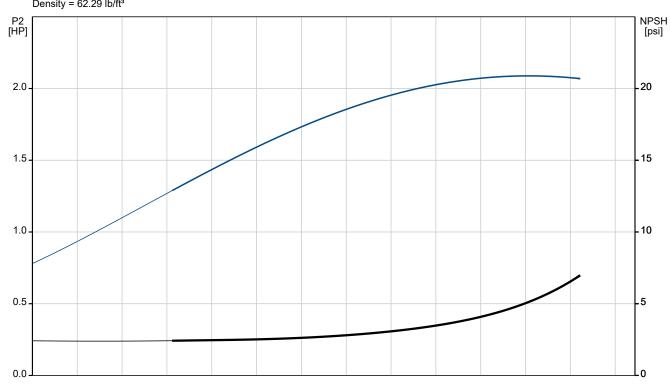





Date:	22/05/2025

Description	Value
General information:	
Product name:	CR 3-11
	A-FGJ-A-V-HQQV
Product No:	96083280
EAN number:	5700395184488
Technical:	
Pump speed on which pump data are based:	3452 rpm
Rated flow:	15.4 US GPM
Rated head:	108.9 psi
Maximum head:	148.4 psi
Stages:	11
Impellers:	11
Number of reduced-diameter impellers:	0
Low NPSH:	N
Pump orientation:	Vertical
Shaft seal arrangement:	Single
Primary shaft seal:	HQQV
Code for shaft seal:	HQQV
Approvals:	CE
Curve tolerance:	ISO9906:2012 3B
Pump version:	Α
Model:	A
Materials:	
Base:	Cast iron
	EN 1561 EN-GJL-200
	ASTM A48-25B
Impeller:	Stainless steel
<u>'</u>	EN 1.4301
	AISI 304
Material code:	A
Code for rubber:	V
Bearing:	SIC
Installation:	
Maximum operating pressure:	362.59 psi
Max pressure at stated temp:	363 psi / 194 °F
	363 psi / -4 °F
Type of connection:	DIN / ANSI / JIS
Size of inlet connection:	DN 25/32
	1 1/4 inch
Size of outlet connection:	DN 25/32
E.E. Or Guide Goriffodion.	1 1/4 inch
Pressure rating for connection:	PN 25
Flange rating inlet:	250 lb
Flange size for motor:	56C
Connect code:	FGJ
Liquid:	1 00
Pumped liquid:	Water
	vvater -4 194 °F
Liquid temperature range:	
Selected liquid temperature:	68 °F
Density:	62.29 lb/ft³
Electrical data:	NENA
Motor standard:	NEMA
Power (P2) required by pump:	2 HP
Controls:	
Frequency converter:	None
Others:	
Net weight:	47.1 lb



Pumped liquid = Water Liquid temperature during operation = 68 °F Density = 62.29 lb/ft³








Date: 22/05/2025

Description	Value
Gross weight:	61.6 lb
Shipping volume:	4.94 ft³
Country of origin:	US
Custom tariff no.:	8413.70.2040



22/05/2025 Date:

96083280 CR 3-11 A-FGJ-A-V-HQQV 60 Hz

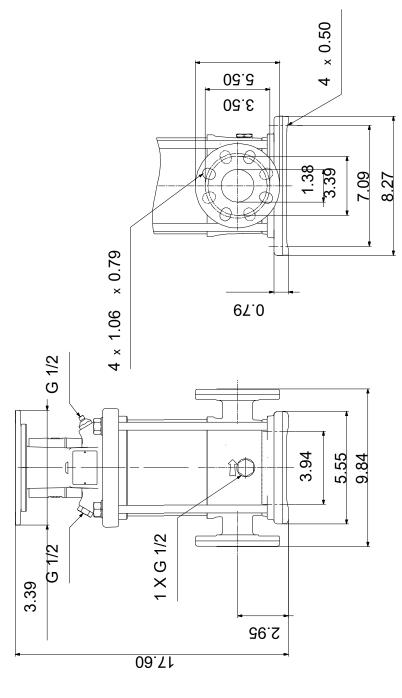

Note! All units are in [in] unless others are stated. Disclaimer: This simplified dimensional drawing does not show all details.