




HVX3D4L-15SVX4GJAXX0-G

Created On: 8/4/25

HVX3D4L-15SVX4GJAXX0-G | Configuration Summary



Designed to transfer and increase the pressure of clean water, e-HVX & e-HVXR Packaged Booster Systems integrate decades of expertise and know-how in pump technology to bring the right combination of motors, variable speed drive and hydraulic pumps in one comprehensive, highly efficient boosting solution.

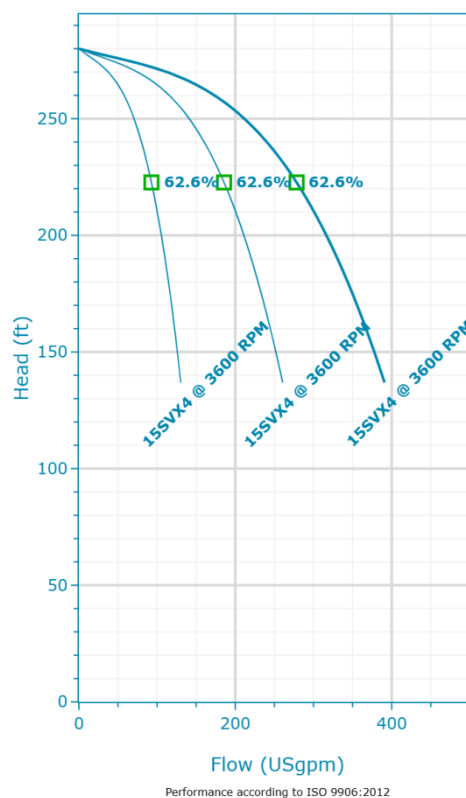

PUMP

Model
15SVX4 3600rpm

Installation
Complete Pump

PACKAGED SYSTEM

Number Of Units	Suction Type
Triplex	Pressurized
Header Size	
4 in	

SEAL

Type of Seal	Rotating Face
Type 21	Carbon
	Stationary Face
	Silicon Carbide
	Elastomers
	FKM

STANDARD OPTIONS

Panel Orientation
Left

MOTOR

Frequency (Hz)	Power
60	10 hp
Poles	Phase (~)
4	3
Enclosure	Voltage
TEFC	380-480 V

HVX3D4L-15SVX4GJAXX0-G | Product Details


Construction Materials

Pump Body (1) Cast Iron (ASTM Class 35/40B)	Shaft (5) Stainless Steel (AISI 316)	Seal Plate (9) Stainless Steel (AISI 316L)	Tie Rods (13) Carbon Steel / Zinc Plated (A29 Gr. 1045)
Impeller (2) Stainless Steel (AISI 304)	Adapter (6) Cast Iron (ASTM Class 35/40B)	Coupling Guard (10) Stainless Steel (AISI 304)	Wear Ring (14) PPS
Diffuser (3) Stainless Steel (AISI 304)	Base (7) Powder Coated Steel (HRPO)	Shaft Sleeve and Bushing (11) Tungsten Carbide	Seal Gland (15) Stainless Steel (AISI 316)
Casing (4) Stainless Steel (AISI 316L)	Coupling (8) Aluminum (A384.0-F)	Fill/Drain Plugs (12) Stainless Steel (AISI 316)	Panel Stand (16) Powder Coated Steel (ASTM A500)

Motor

Enclosure TEFC	Rated Power 10 hp	Phase 3	MCA 79.25
Speed 3,600 rpm	Rated Voltage 380-480 V	FLA 73	

HVX3D4L-15SVX4GJAXX0-G | Hydraulic Data & Performance Curve

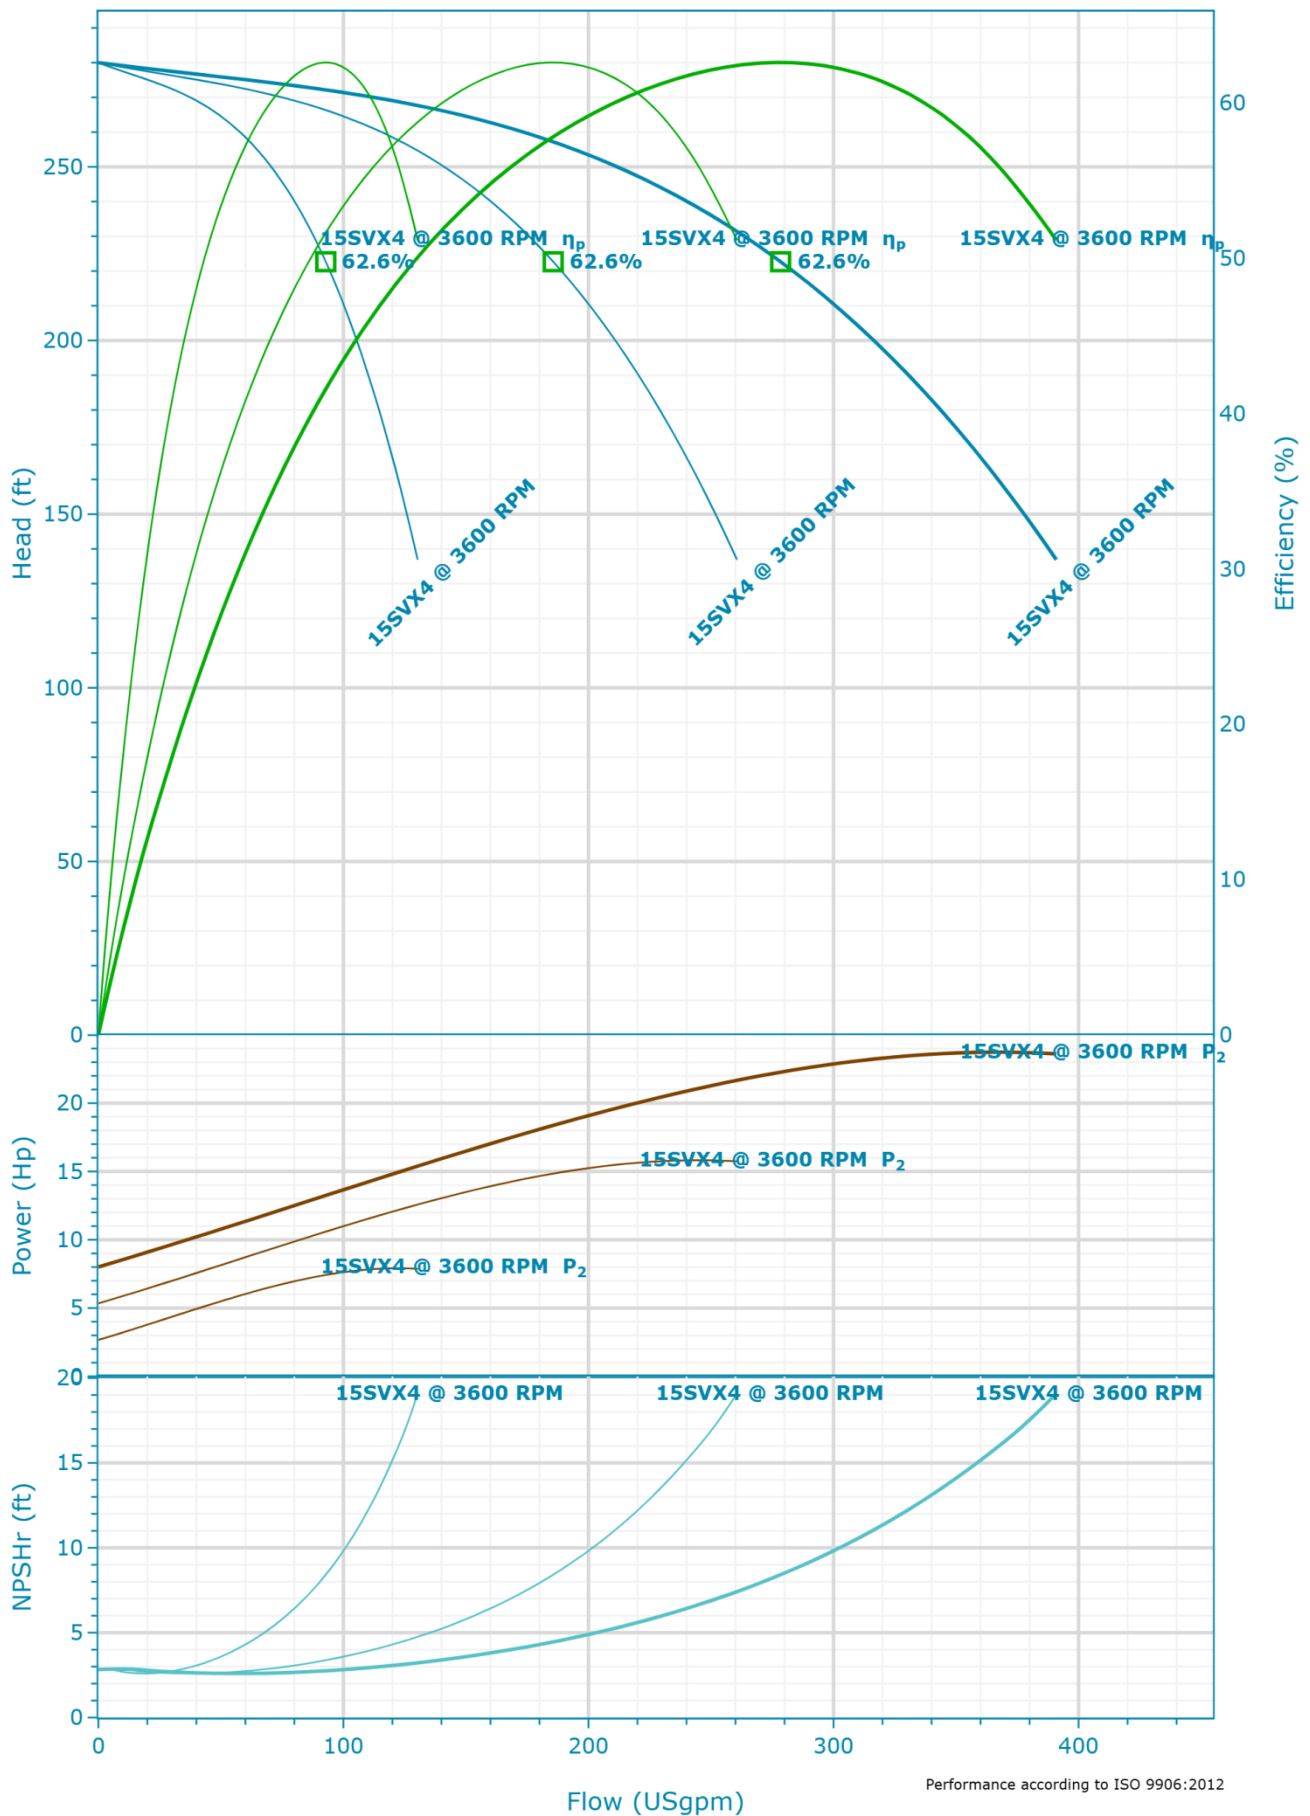

Selection

Series	System Type
AQUAFORCE e-HVX	Multi Pump
Name	Operating Pumps
HVX3 15SVX4	3
Stages	Standby Pumps
4	No Standby Pump
Frequency	
60 Hz	
Suction Type	
Pressurized	
Station Losses	
5.00 psi	
Acceptance Grade	
Manufacturer's Standard	

Fluid

Fluid Type	Density
Water	62.428 lb/ft ³
Fluid Temperature	Dynamic Viscosity
39.2 °F	1.567212 cP
Specific Gravity	Fluid Vapor Pressure
1	0.118 psi

Design Curve - Single Pump




Rated Speed	BEP Flow (1x)
3,600 RPM	92.81 USgpm
Max Flow (1x)	BEP Head (1x)
130.3 USgpm	222.68 ft
H@QMin (1x)	Max Operating Pressure (1x)
280 ft	121.21 psi
H@QMax (1x)	Max P2 (1x)
136.9 ft	7.91 Hp
BEP (1x)	
62.6 %	

Design Curve - System


Rated Speed	BEP Flow
3,600 RPM	278.42 USgpm
Max Flow	BEP Head
390.9 USgpm	222.68 ft
H@QMin	Max Operating Pressure
280 ft	121.21 psi
H@QMax	Max P2
136.9 ft	23.73 Hp
BEP	
62.6 %	

HVX3D4L-15SVX4GJAXX0-G | Dimensional Data & Drawing

e-HVX Dimensions
15SVX Triplex Pump
LEFT ORIENTATION

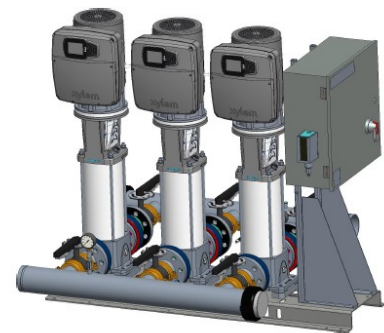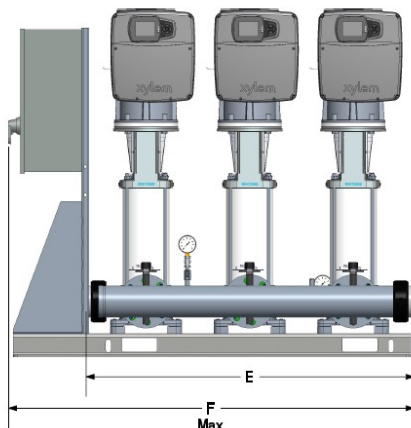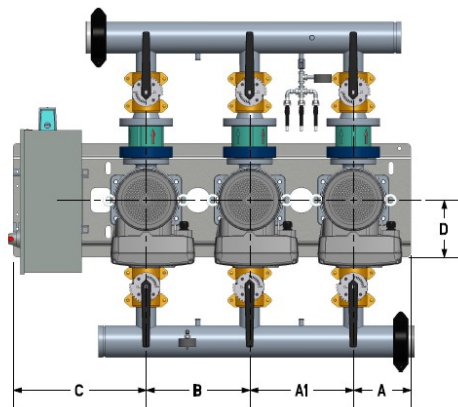

RIGHT ORIENTATION

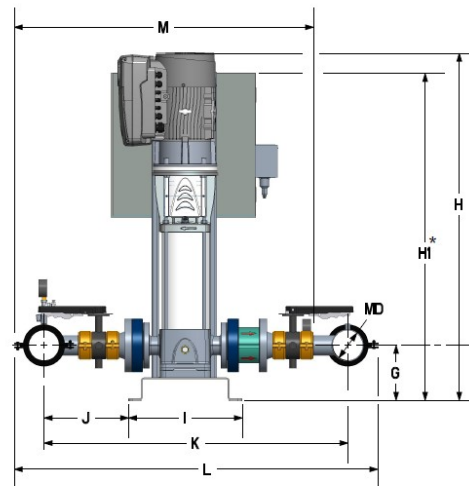

* Note: If Antenna is put on top of electric panel, Height H1 will be increased by 1.75" [45mm]

Dimensions

A	D	H	K
8.125 in	8 in	46.15 in	42.75 in
A1	E	H1	L
14.625 in	46.125 in	46.125 in	51.125 in
B	F	I	M
14.625 in	57 in	16 in	42 in
C	G	J	MD
18.75 in	7.75 in	11.875 in	4 in
Weight			
1,117 lb			

Company	PFC Equipment
Contact	Kelly Kresa
Phone No.	7633915856
Email	kkresa@pfcequip.com