

Submittal Data

PROJECT:	UNIT TAG:	QUANTITY:
REPRESENTATIVE: _____	TYPE OF SERVICE:	DATE: _____
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:
	ORDER NO.:	DATE:


Hydro MPC-E 6 CRE 64-1




Advanced and energy efficient pressure boosting system for boosting of clean water. Available with 2-6 parallel connected pumps, Integrated advanced controller and all necessary fittings

Note! Product picture may differ from actual product

Conditions of Service		Pump Data		Motor Data	
Liquid:	Water	Liquid temperature range:	41 .. 179.6 °F	Mains frequency:	60 Hz
Temperature:	68 °F	Maximum ambient temperature:	104 °F	Enclosure class:	IP54
Specific Gravity:	1.000	Product number:	99689306		

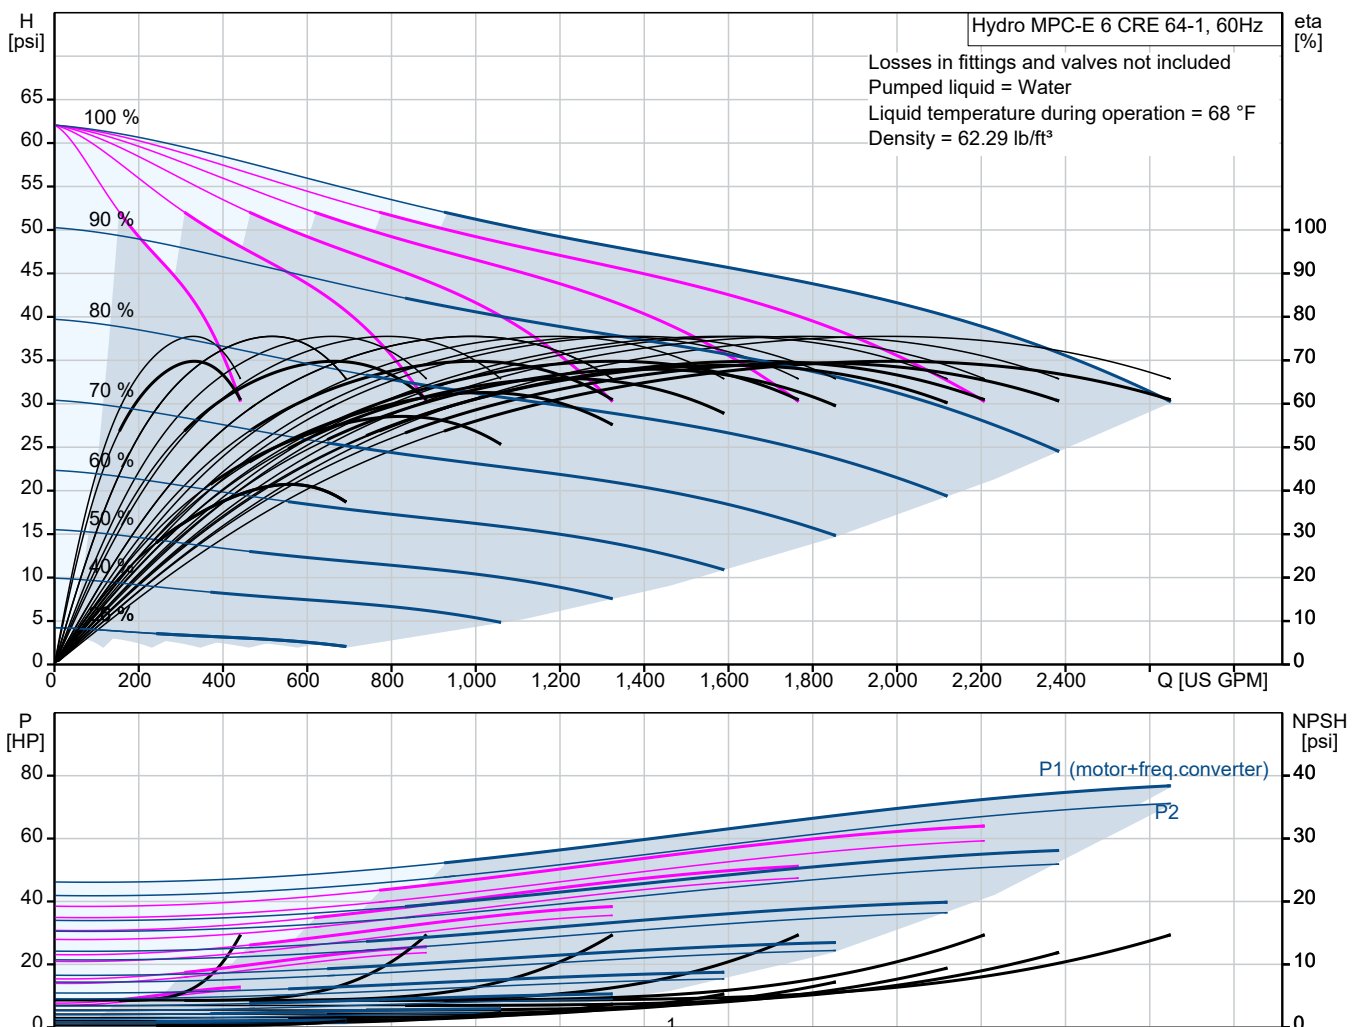

Submittal Data

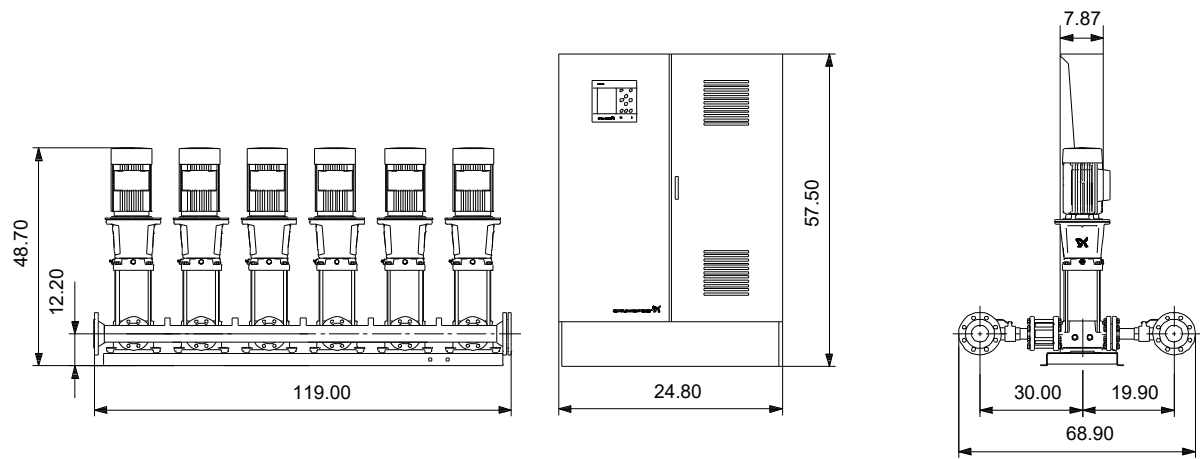

Materials:

Project:

Reference Number:

Client:

Client Number:

Contact:

Qty. Description

1 Hydro MPC-E 6 CRE 64-1



Note! Product picture may differ from actual product

Product No.: [99689306](#)

Pressure booster system supplied as a compact packaged assembly certified and listed by UL (Category QCZJ – Packaged Pumping Systems) for conformance to US and Canadian standards.

The Hydro MPC-E systems with Grundfos MLE motors from 0.5 to 30 hp (0.37 to 22 kW) have a total efficiency which exceeds the Super Premium Efficiency EuP IE5 level according to IEC 60034-30-1.

Approvals:

NSF61/NSF372 – Drinking Water and Low Lead approval. OSHPD Seismic certification available on MPC E CR(CUE) systems.

All pumps are variable-speed pumps.

Each pump is equipped with an integrated variable-frequency drive motor (MLE motor).

- Hydro MPC-E maintains constant pressure through continuous speed adjustment of the pumps.
- The system performance is adjusted to the demand by starting and stopping the required number of pumps and through parallel control of the pumps in operation.
- Pump changeover is automatic and depends on load, operating hours and fault.
- All pumps in operation will run at equal speed.

The system consists of these parts:

- vertical multistage centrifugal pumps, type CRE 45-3
- rotating pump parts in contact with the pumped liquid are made of ANSI 304 stainless steel as standard and available as ANSI 316 stainless steel as an option.

Pump bases and pump heads are made of cast iron (Class 30) as standard and ANSI 316 stainless steel as an option.

The pumps are equipped with the service-friendly cartridge-type mechanical-shaft seal HQQE (SiC/SiC/EPDM).

- Inlet and outlet manifolds are made of 316 stainless steel.
- Base frame is made of 304 stainless steel.
- One non-return valve (check valve) and two isolating valves for each pump.
- Adapter with isolating valve for connection of diaphragm tank.
- Pressure gauge and pressure transducer on each inlet and outlet manifold.

Dry-running protection is standard with use of pressure transducer on inlet manifold.

- Steel operating panel with UL Type 3R (MPC E CRE) or Type 12 MPC E CR(CUE) enclosure rating, including main disconnect switch, all required fuses, motor protection, switching equipment and microprocessor-controlled CU 352.



Company name:

Created by:

Phone:

Date:

17/09/2025

Project:

Reference Number:

Client:

Client Number:

Contact:

Qty.	Description								
1	<p>Diaphragm tank is available as an accessory.</p> <p>Pump operation is controlled by CU352 controller, specifically designed to control parallel operation of multiple pumps with the following features and functions:</p> <ul style="list-style-type: none">- PID controller with adjustable PI parameters ($K_p + T_i$)- constant pressure at setpoint, independent of inlet pressure- stop function (no flow shutdown)- automatic cascade control of pumps for optimum efficiency- selection of min. time between start and stop, automatic pump changeover and pump priority- automatic pump test function to prevent idle pumps from seizing- standby pump allocation capability- redundant primary sensor capability- manual operation- proportional pressure control- multisensor zone control with up to six zones- differential pressure and temperature control using two separate sensors (that is outlet-inlet subtraction)- secondary fallback sensor will revert to secondary (local) sensor upon primary (remote) sensor failure- digital pulse water meter reading (log accumulated flow)- forced pump changeover- clock program- soft pressure build-up- external setpoint influence (via analogue input)- emergency run (via digital input)- password protection- possibility of digital remote-control functions (via digital inputs):- system on and off- max., min. or user-defined duty range- up to 6 alternative setpoints- digital inputs and outputs can be configured individually. <p>Pump and system monitoring functions:</p> <ul style="list-style-type: none">- minimum and maximum limits of measured values (flow, level, temp., etc.)- built-in data-logging capability- non-return valve (check valve) failure detection- high system pressure protection- low system pressure protection- pump curve data loaded into controller to provide end-of-curve protection- alarm log with the previous 24 warnings and alarms- potential-free changeover switches for operation and fault- Grundfos bus communication with optional gateway connections for all popular communication protocols- Ethernet connection (built-in web server). <p>Pre-fabricated and tested packaged pump system including pumps, pipes and wiring complete with control MPC.</p> <p>There are options to upgrade the pressure boosting system.</p> <table><tr><td>Flow media:</td><td>Water</td></tr><tr><td>Flow (Plant):</td><td>2690 US GPM</td></tr><tr><td>Nom. current of plant:</td><td>108 A</td></tr><tr><td>Nominal power:</td><td>14.8 HP</td></tr></table>	Flow media:	Water	Flow (Plant):	2690 US GPM	Nom. current of plant:	108 A	Nominal power:	14.8 HP
Flow media:	Water								
Flow (Plant):	2690 US GPM								
Nom. current of plant:	108 A								
Nominal power:	14.8 HP								



Company name:

Created by:

Phone:

Date:

17/09/2025

Project:



Reference Number:

Client:

Client Number:

Contact:

99689306 Hydro MPC-E 6 CRE 64-1 60 Hz

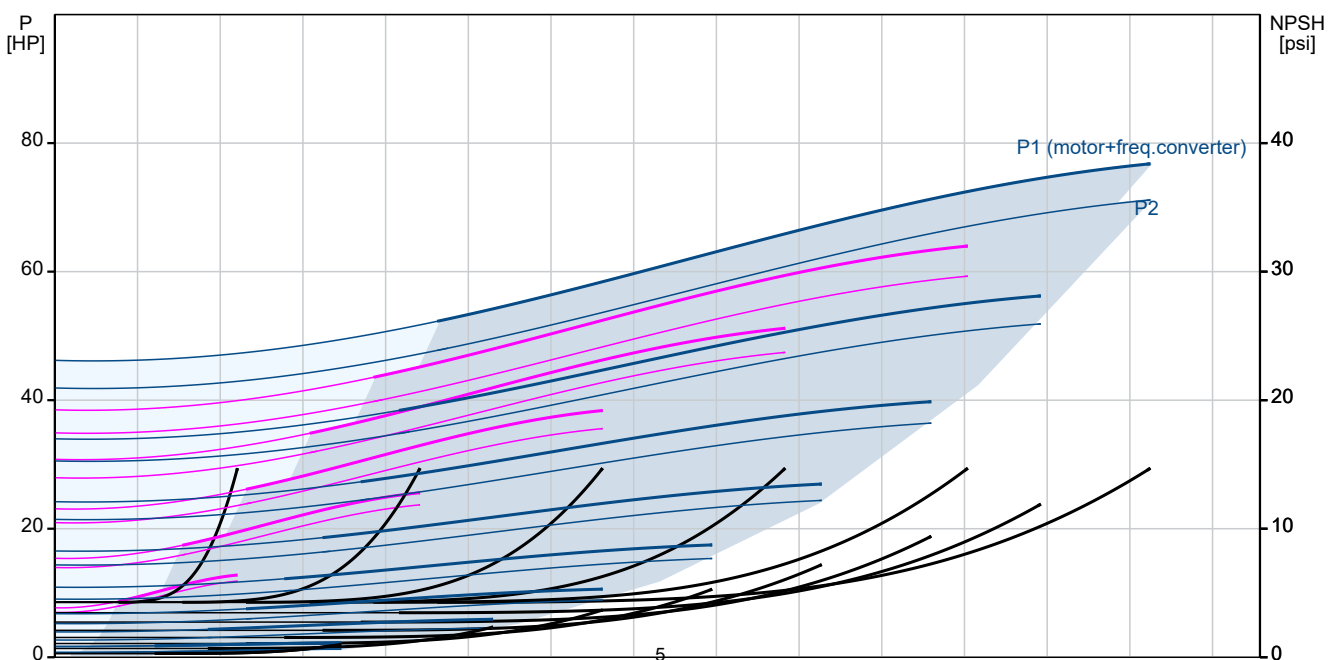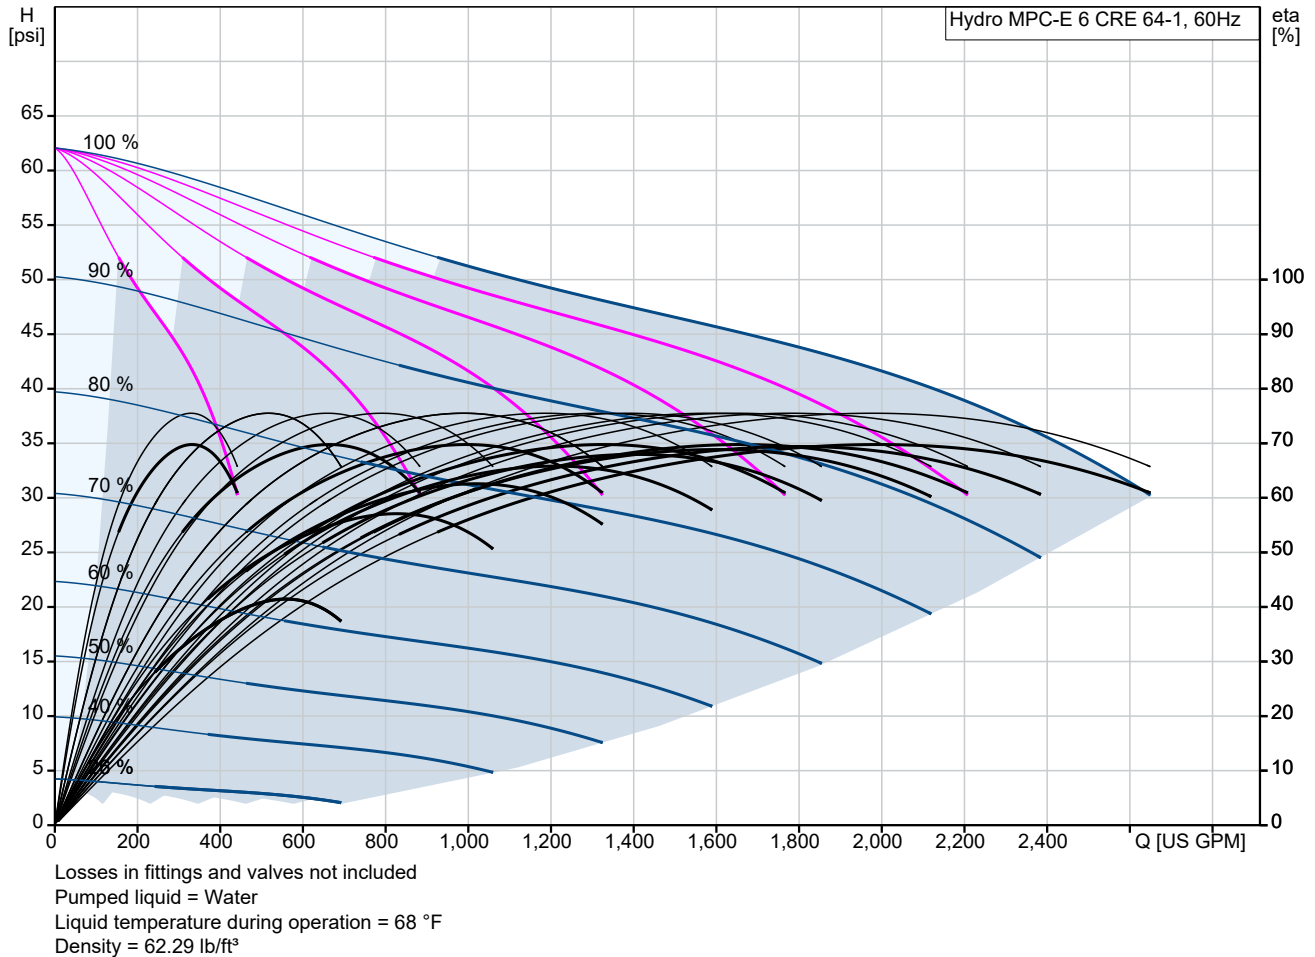

Project:


Reference Number:

Client:




Client Number:

Contact:

Description	Value
General information:	
Product name:	Hydro MPC-E 6 CRE 64-1
Product No:	99689306
EAN number:	5713832932559
Technical:	
Rated flow:	2030 US GPM
Max. flow:	2690 US GPM
Rated head:	44.72 psi
Maximum head:	66.59 psi
Approvals:	CULUS, PROP65
Main pump name:	CRE 64-1
Main pump No:	99426771
Non-return valve position:	Outlet
Number of pumps:	6
Materials:	
Manifold:	Stainless steel
	EN 1.4571
	AISI 316 TI
Base:	Stainless steel
	EN 1.4301
	ASTM 304
Installation:	
Range of ambient temperature:	41 .. 104 °F
Maximum operating pressure:	232.06 psi
Manifold inlet:	ANSI 12"
Manifold outlet:	ANSI 12"
Pressure rating for connection:	PN 16
Earth connection:	PE
System design:	D
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	41 .. 179.6 °F
Selected liquid temperature:	68 °F
Density:	62.29 lb/ft³
Electrical data:	
Power (P2) main pump:	14.8 HP
Rated power - P2:	15 HP
Mains frequency:	60 Hz
Rated voltage:	3 x 460-480 V
Rated current:	17.3 A
Rated current of system:	108 A
Method of start:	Variable frequency drives
Enclosure class (IEC 34-5):	IP54
Radio interference suppression:	EMC DIRECTIVE(2014/30/EU)
Number of phases of main pump:	3
Controls:	
Control type:	E
Dry running protection, mechanical:	PRESSURE SENSOR 0-10 BAR
Controller:	CU 352
Tank:	
Diaphragm tank:	No
Others:	
Net weight:	3890 lb
Gross weight:	4530 lb

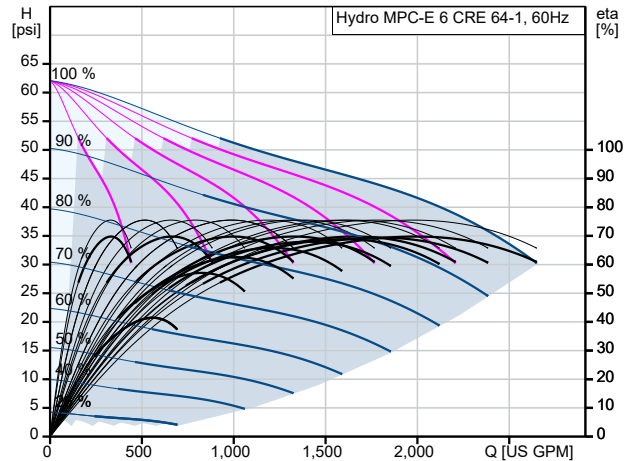

Losses in fittings and valves not included
Pumped liquid = Water
Liquid temperature during operation = 68 °F
Density = 62.29 lb/ft³

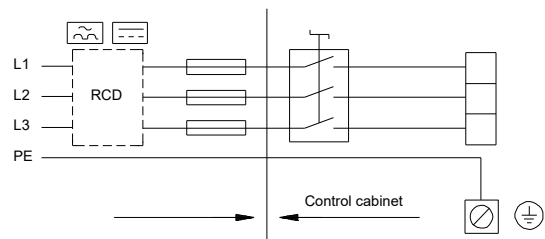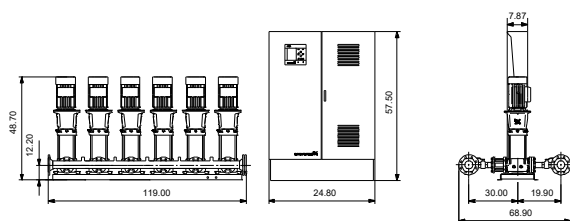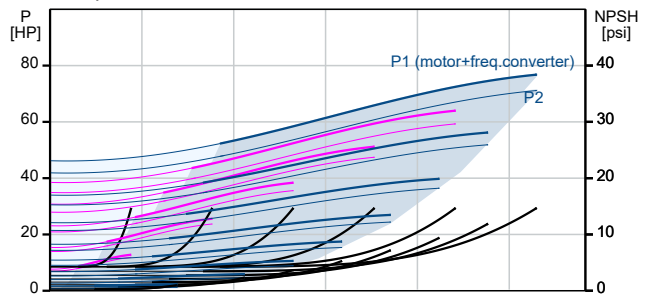



Company name:

Created by:

Phone:

Date:

17/09/2025

Project:

Reference Number:

Client:

Client Number:

Contact:

Description	Value
Shipping volume:	389 ft³
Sales region:	Namreg
Config. file no. pump:	98272461
Config. file no. Control MPC:	98271950
Config. file no. Hydro MPC:	98272054
Country of origin:	US
Custom tariff no.:	8413.70.2040

Project:


Reference Number:

Client:

Client Number:

Contact:

99689306 Hydro MPC-E 6 CRE 64-1 60 Hz

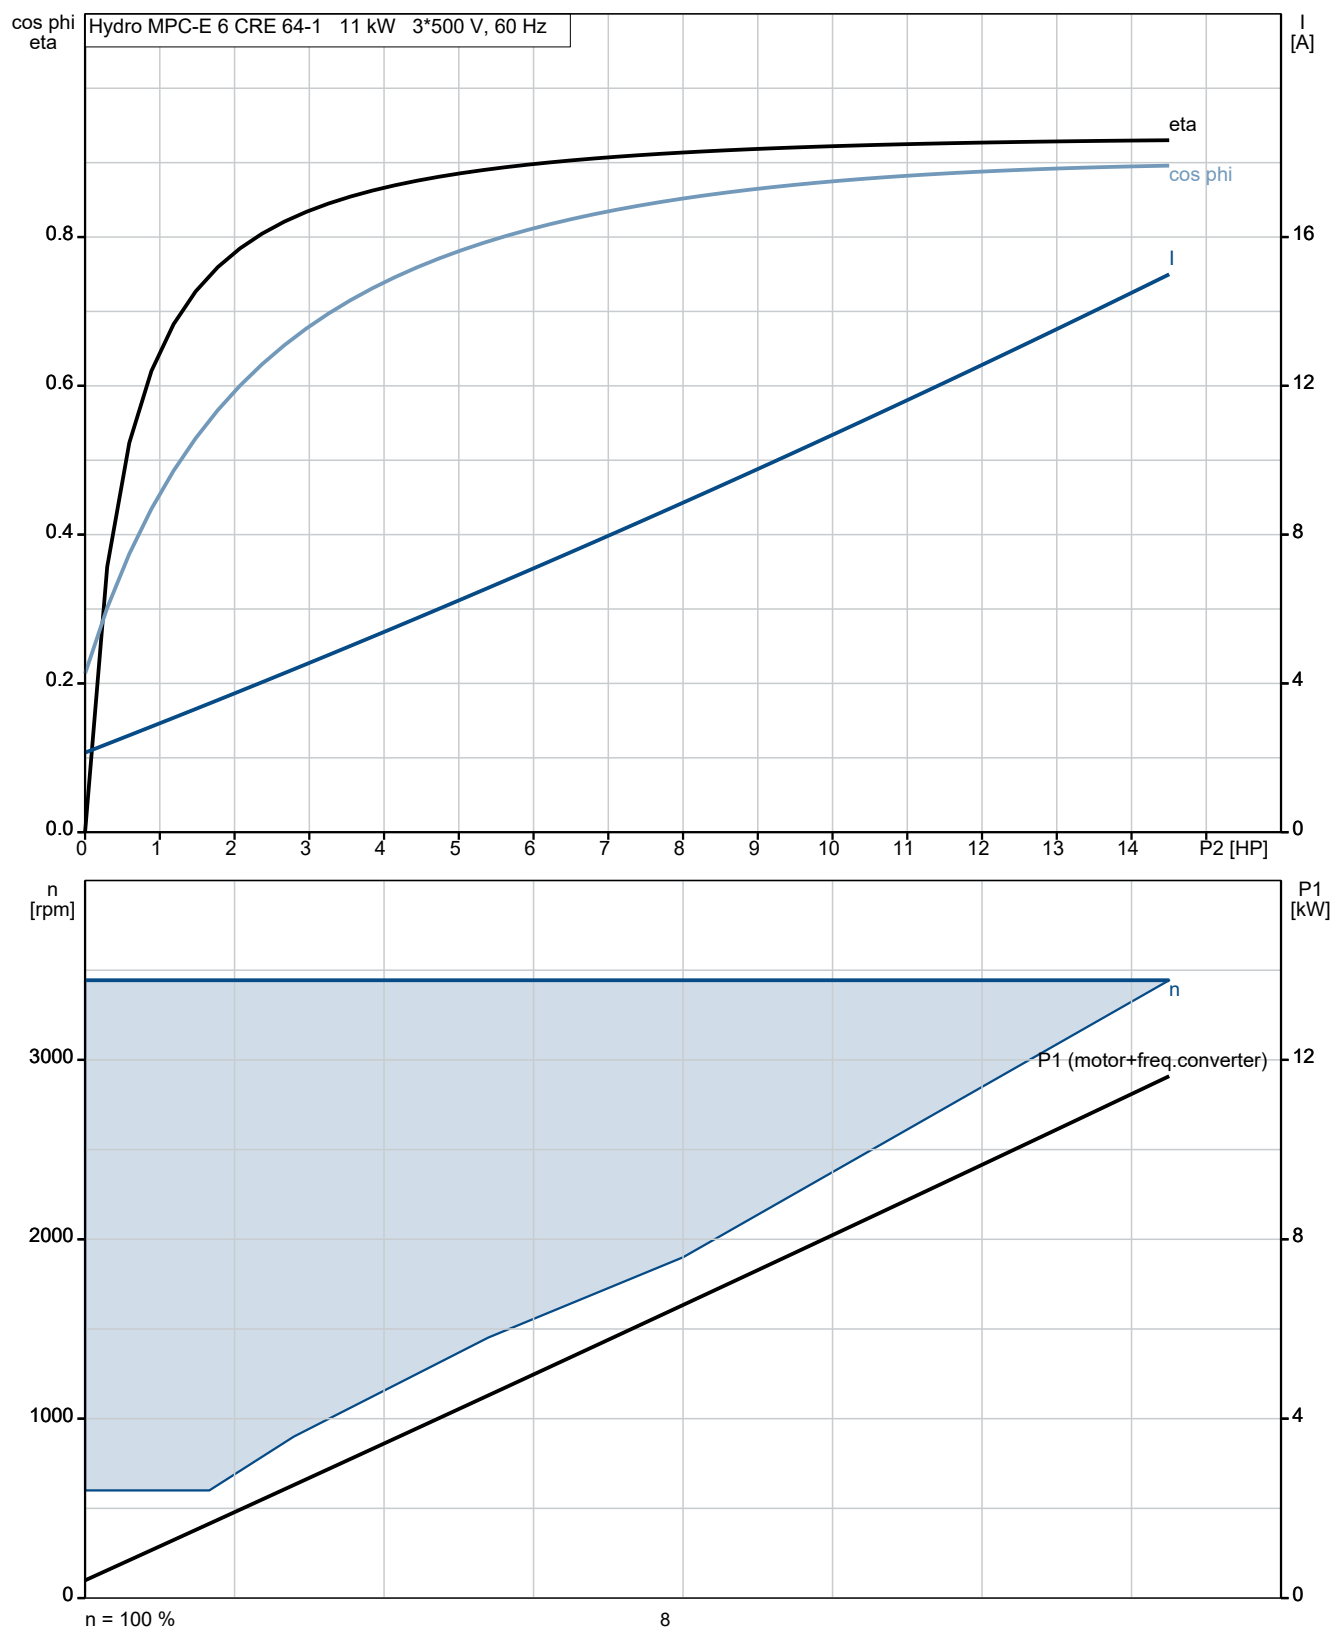



Company name:

Created by:

Phone:

Date:

17/09/2025

Project:




Reference Number:

Client:

Client Number:

Contact:

99689306 Hydro MPC-E 6 CRE 64-1 60 Hz

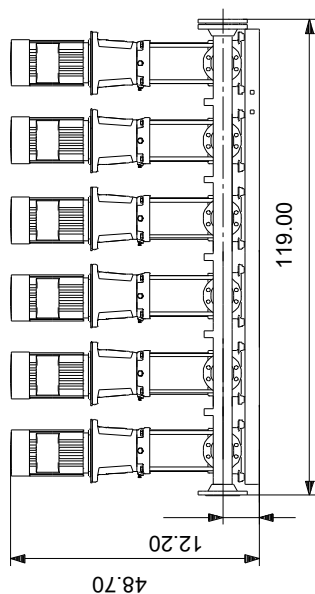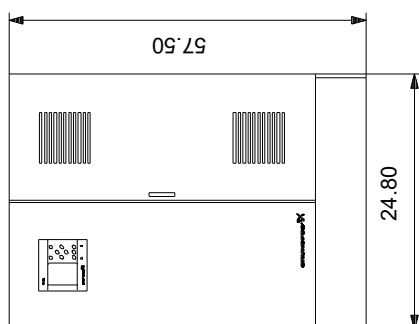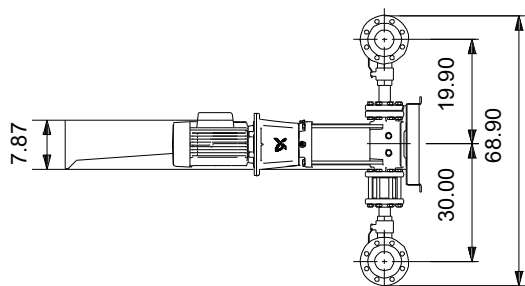

Note! All units are in [in] unless others are stated.

Disclaimer: This simplified dimensional drawing does not show all details.

99689306 Hydro MPC-E 6 CRE 64-1 60 Hz

