


www.pfcstore.com - 763-425-7890 / 800-328-2350



## GRUNDFOS - PACO LF CENTRIFUGAL PUMP 15955 40 HP

CAST IRON/STAINLESS IMPELLER |  
BUNA MECH SEAL | 30HP TEFC PRE  
EFF, 3600RPM, 3/60/208/230-460  
VOLTS | 2 X 1.50 - IMPELLER 9.60"  
| CONNECTIONS- NPS | BEP 214  
GPM @ 345 FTH

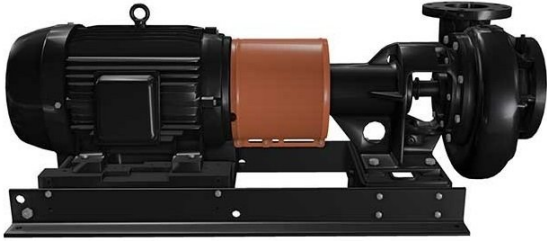

---

**SKU:** 99865389

**Stock:** Out of stock contact us for  
lead time

**Categories:** [Paco LF Pumps](#)

**Model Number**

11-15955-146P08-2891P  
BPRNC2S101AA

**Part Number** 99865389

## PRODUCT DESCRIPTION

### LF Frame mounted centrifugal Pump

- Machined Mounting Surfaces and Fabricated Base Plate – aid in alignment

[www.pfcstore.com](http://www.pfcstore.com) - 763-425-7890 / 800-328-2350

- Choice of Motor Enclosures – increases flexibility of design
- Large Seal Chamber – allows various seal configurations and customization
- Integrally Cast Diffuser Vane – reduces turbulence and need for suction guides
- Francis Vane Impeller Design – increases efficiency and reduces NPSH required
- Bronze Case Wear Rings – extend pump life and increase efficiency
- Trimmed and Balanced Impellers – customization, reduced noise and vibration, & prolonged seal and bearing life

## Applications

- HVAC
- Plumbing
- Pressure Boosting
  - Industrial
  - Water Utility
  - Wastewater
  - Agriculture

**Estimated delivery is 3 to 4 weeks**

[SPEC & CURVES](#)

[PARTS GUIDE](#)

[LF Manual](#)

## ADDITIONAL INFORMATION

|                    |                                |
|--------------------|--------------------------------|
| <b>Weight</b>      | 817 lbs                        |
| <b>Dimensions</b>  | 42 × 24 × 24 in                |
| <b>Connections</b> | <a href="#"><u>2 X 1.5</u></a> |

[www.pfcstore.com](http://www.pfcstore.com) - 763-425-7890 / 800-328-2350

|                              |                          |
|------------------------------|--------------------------|
| <b>Best Efficiency Point</b> | <u>214 GPM @ 345 FTH</u> |
| <b>Hertz</b>                 | <u>60</u>                |
| <b>Horse Power</b>           | <u>40</u>                |
| <b>Motor Type</b>            | <u>TEFC</u>              |
| <b>Phase</b>                 | <u>3</u>                 |
| <b>RPM</b>                   | <u>3600</u>              |
| <b>Voltage</b>               | <u>230-460</u>           |
| <b>Wetted Material</b>       | <u>CAST IRON-BUNA</u>    |