


www.pfcstore.com - 763-425-7890 / 800-328-2350

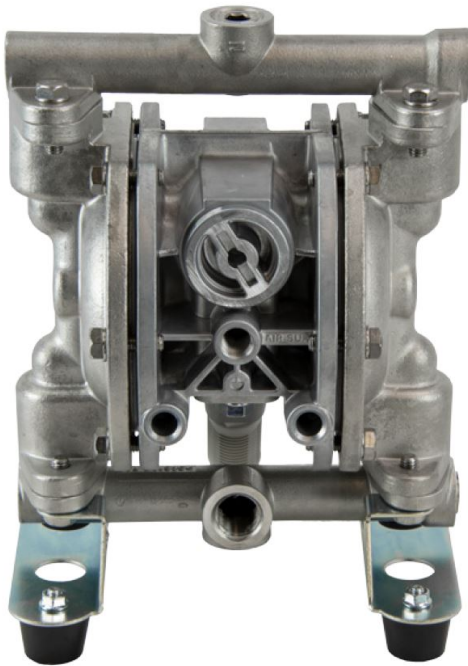

YAMADA AOD PUMP GLOBAL SERIES IN 316SS SANTOPRENE & EPDM G15

316SS-Santoprene /EPDM Gasket

10 GPM @ 200 FTH / MAX 16.6
GPM

1/2 NPT Female

Max Temp 212°F

Maximum Dry Suction Lift: Rubber
fitted pump capability: 13.5' - PTFE
fitted pump capability: 11'

Replaces the ARO AODD Pump
660Sj



SKU: 854737

Stock: 1 in stock (can be
backordered)

Categories: [AOD Pumps](#)

Tags: [Yamada Pumps](#)

Model Number 854737

Part Number G15SS11

www.pfcstore.com - 763-425-7890 / 800-328-2350

PRODUCT DESCRIPTION

Yamada AOD Pump

G15 Global Series 1/2" AODD pumps provide a maximum flow rate of 16.6 GPM and are available in Aluminum, Stainless Steel (316), Pure Polypropylene and Kynar. We offer a wide selection of diaphragm materials that cover a variety of applications.

Yamada pumps utilize a Step Spool (S-Spool).

Yamada Global Series pumps do not have an independent pilot valve system (less parts) and consume less air versus the competition. Available with multiport options, these AODD pumps perform extremely well in continuous stop/start operations and provide exceptional suction lift.

Estimated delivery 2 weeks

[Curves & Specs](#)

ADDITIONAL INFORMATION

Weight	22 lbs
Dimensions	15 × 15 × 16 in
Connections	<u>1/2"FNPT</u>
Max GPM	<u>16.6 GPM</u>
Wetted Material	<u>316SS-SANTOPRENE-EPDM</u>