


www.pfcstore.com - 763-425-7890 / 800-328-2350



## YAMADA AOD PUMP NDP-5FST 316SS & PTFE

Max GPM 3.1 | 316SS & PTFE | 1/4  
NPT

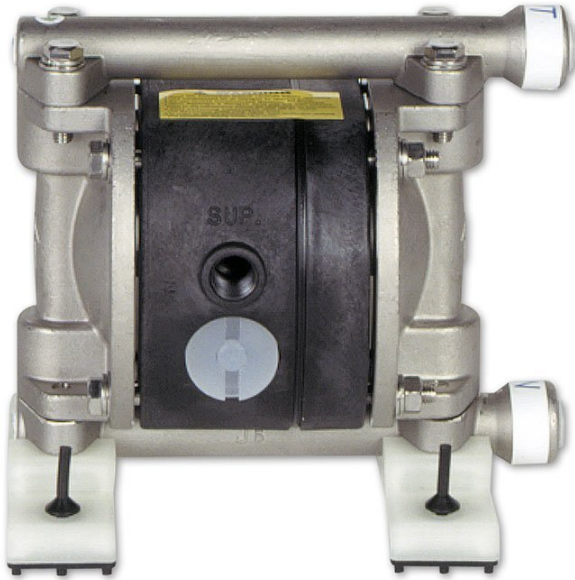

**SKU:** 851565

**Stock:** 15 in stock (can be  
backordered)

**Categories:** [AOD Pumps](#)

**Tags:** [Yamada Pumps](#)

**Model Number** NDP-5FST

**Part Number** 851565

## PRODUCT DESCRIPTION

3.4 Gallons/Minute Max.

1/4" NPT Fluid Port

Intake & Discharge Connection 1/4" Female NPT

Air Inlet 1/4" Female NPT (includes ball valve)

Air Exhaust 3/8" Female NPT (includes silencer)

Air Supply Pressure (All Models) 20 to 100 PSI (1.4 to 7 kgf/cm<sup>2</sup>)

Discharge Volume Per Cycle 0.0085 gallons (35 cc)

Maximum Cycles Per Minute All diaphragms: 400

Maximum Dry Suction Lift 5-feet

Air Motor Standard: Ryton® Air Motor

www.pfcestore.com - 763-425-7890 / 800-328-2350

Muffler Internal

MAXIMUM LIQUID TEMPERATURE FITTED WITH PTFE DIAPHRAGM

- Groundable Acetal 180F (82C)
- Polypropylene (PPG) 180F (82C)
- Kynar® (PVDF) 212F (100C)
- Aluminum (ADC-12) 212F (100C)
- Stainless Steel (316) 212F (100C)

Estimated delivery 1 to 4 days

Contact us for actual lead time

Product photo could vary from the actual product

[Curves & Specs](#)

ADDITIONAL INFORMATION

|                 |                            |
|-----------------|----------------------------|
| Weight          | 7 lbs                      |
| Dimensions      | 14 × 12 × 12 in            |
| Connections     | <a href="#">1/4"NPT</a>    |
| Max GPM         | <a href="#">3.1</a>        |
| Wetted Material | <a href="#">316SS-PTFE</a> |