

| | | |
|-----------------------|------------------------|-----------------|
| PROJECT: _____ | UNIT TAG: _____ | QUANTITY: _____ |
| REPRESENTATIVE: _____ | TYPE OF SERVICE: _____ | DATE: _____ |
| ENGINEER: _____ | SUBMITTED BY: _____ | DATE: _____ |
| CONTRACTOR: _____ | APPROVED BY: _____ | DATE: _____ |
| | ORDER NO.: _____ | DATE: _____ |


CM 3-4 A-S-I-V-AQQV E-A-A-N





CM are reliable, quiet and compact horizontal end-suction pumps. The modular pump design makes it easy to make customised solutions. The CM pumps are available in cast iron and stainless steel

Note! Product picture may differ from actual product


| Conditions of Service | Pump Data | Motor Data |
|-------------------------|-----------------------------------------------|------------------------|
| Flow: 14.1 US GPM | Max pressure at stated temp: 232 psi / 194 °F | Mains frequency: 60 Hz |
| Head: 131.1 ft | Liquid temperature range: -4 .. 248 °F | Enclosure class: IP55 |
| Efficiency: 38.6 % | Maximum ambient temperature: 131 °F | |
| Liquid: Water | Shaft seal: AQQV | |
| Temperature: 68 °F | Product number: 97568357 | |
| NPSH required: 6.95 ft | | |
| Viscosity: _____ | | |
| Specific Gravity: 1.000 | | |

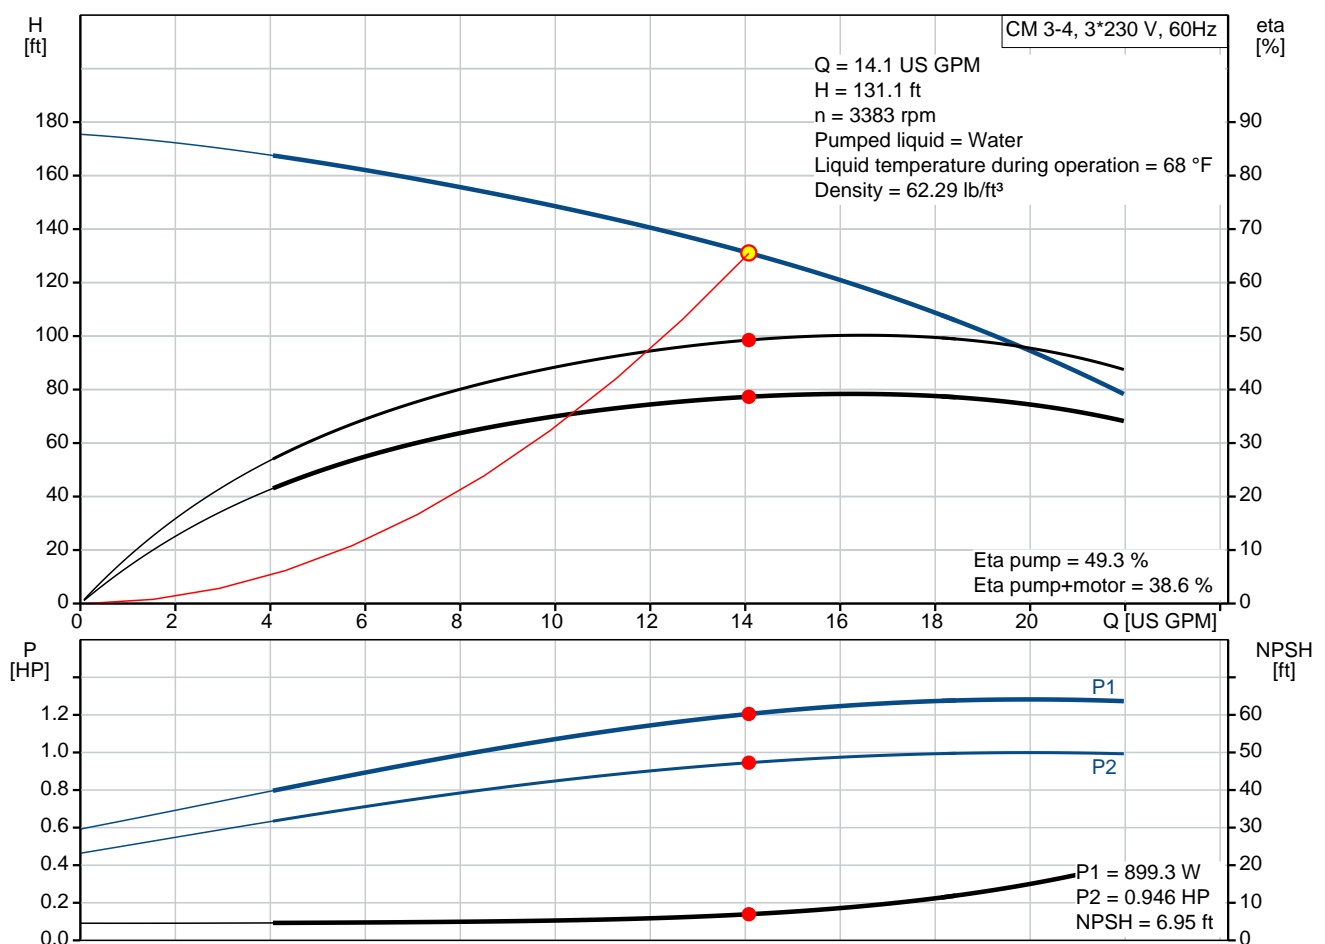

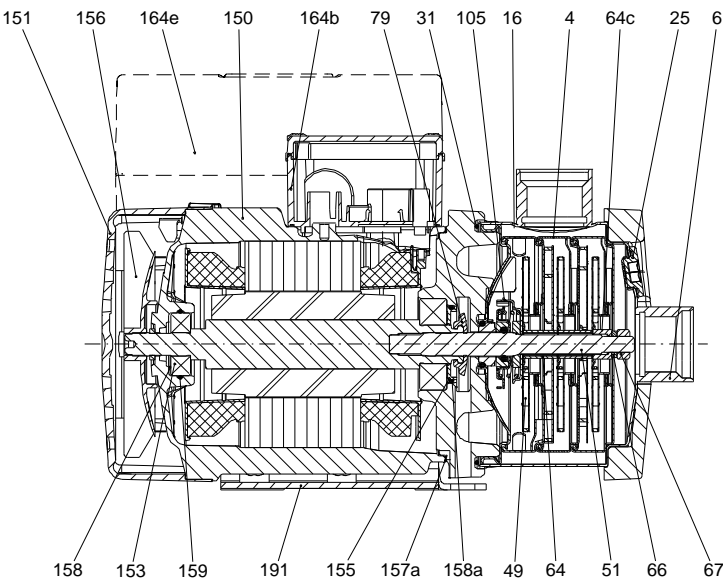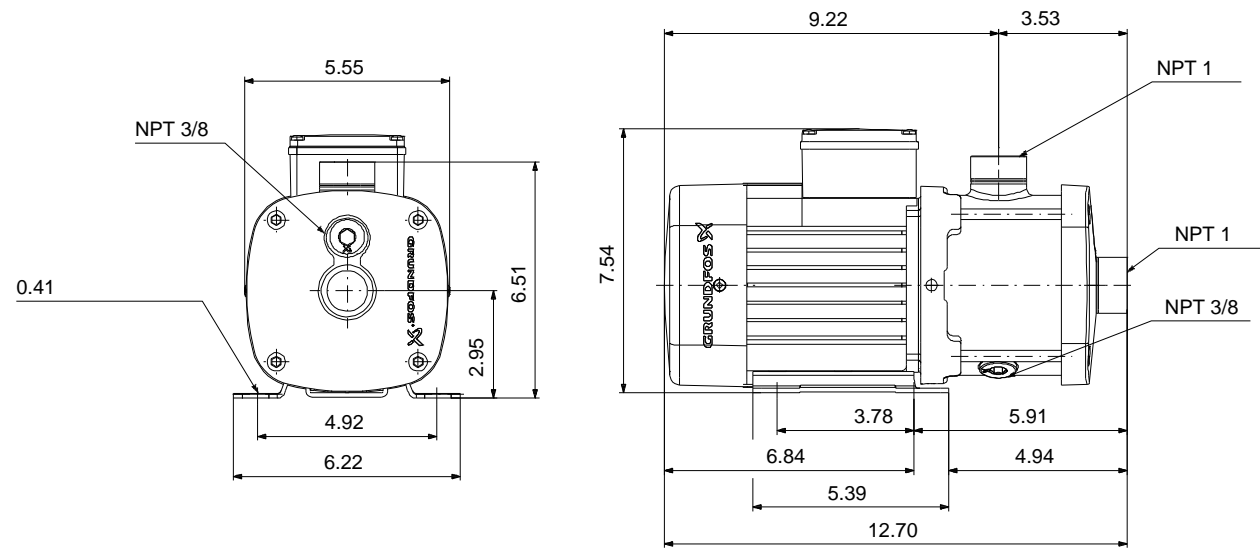

Materials:
Pump housing: Stainless steel
AISI 304
Impeller: Stainless steel
AISI 304
EN 1.4301
Material code: I
Code for rubber: V

165x100
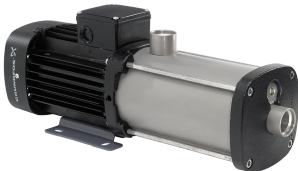
| Qty. | Description |
|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | <p>CM 3-4 A-S-I-V-AQQV E-A-A-N</p>  <p>Note! Product picture may differ from actual product</p> <p>Product No.: 97568357</p> <p>Compact, reliable, horizontal, multistage, end-suction centrifugal pump with axial suction port and radial discharge port. Pump materials in contact with the liquid are in stainless steel. The mechanical shaft seal is a special designed, unbalanced O-ring seal. Pipework connection is via internal NPT pipe threads.</p> <p>The pump is fitted with a 3-phase, foot-mounted, fan-cooled asynchronous motor.</p> <p>Controls: Frequency converter: NONE</p> <p>Liquid: Pumped liquid: Water Liquid temperature range: -4 .. 248 °F Selected liquid temperature: 68 °F Density: 62.29 lb/ft³</p> <p>Technical: Pump speed on which pump data are based: 3480 rpm Actual calculated flow: 14.1 US GPM Rated flow: 16.4 US GPM Resulting head of the pump: 131.1 ft Rated head: 129.4 ft Code for shaft seal: AQQV Curve tolerance: ISO9906:2012 3B</p> <p>Materials: Pump housing: Stainless steel EN 1.4301 AISI 304 Impeller: Stainless steel EN 1.4301 AISI 304</p> <p>Installation: Range of ambient temperature: -4 .. 131 °F Maximum operating pressure: 232.06 psi Max pressure at stated temp: 232 psi / 194 °F 145 psi / 250 °F Type of connection: NPT(F) Size of inlet connection: 1 inch Size of outlet connection: 1 inch Outlet position: 12</p> <p>Electrical data: Motor standard: NEMA Frame size: 71B</p> |



Company name:

Created by:


Phone:

Date:


26/03/2020

| Qty. | Description |
|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | <p>Rated power - P2: 0.992 HP Mains frequency: 60 Hz Suitable for 50/60 Hz: N Phases: 3 Rated voltage: 208-230YY/440-480Y V Service factor: 1.00 Rated current: 3,4-3,6/1,7-1,8 A Rated speed: 3220-3370 rpm Enclosure class (IEC 34-5): IP55 Insulation class (IEC 85): F Built-in motor protection: NONE</p> <p>Others: Terminal box position: 12 Minimum efficiency index, MEI $\eta_{\%}$: 0.7 Net weight: 28.1 lb Gross weight: 33.6 lb Approvals: CE,CULUS,WRAS,ACS,TR,EAC,CURUS Country of origin: US Custom tariff no.: 8413.70.2040</p> |

97568357 CM 3-4 A-S-I-V-AQQV E-A-A-N 60 Hz

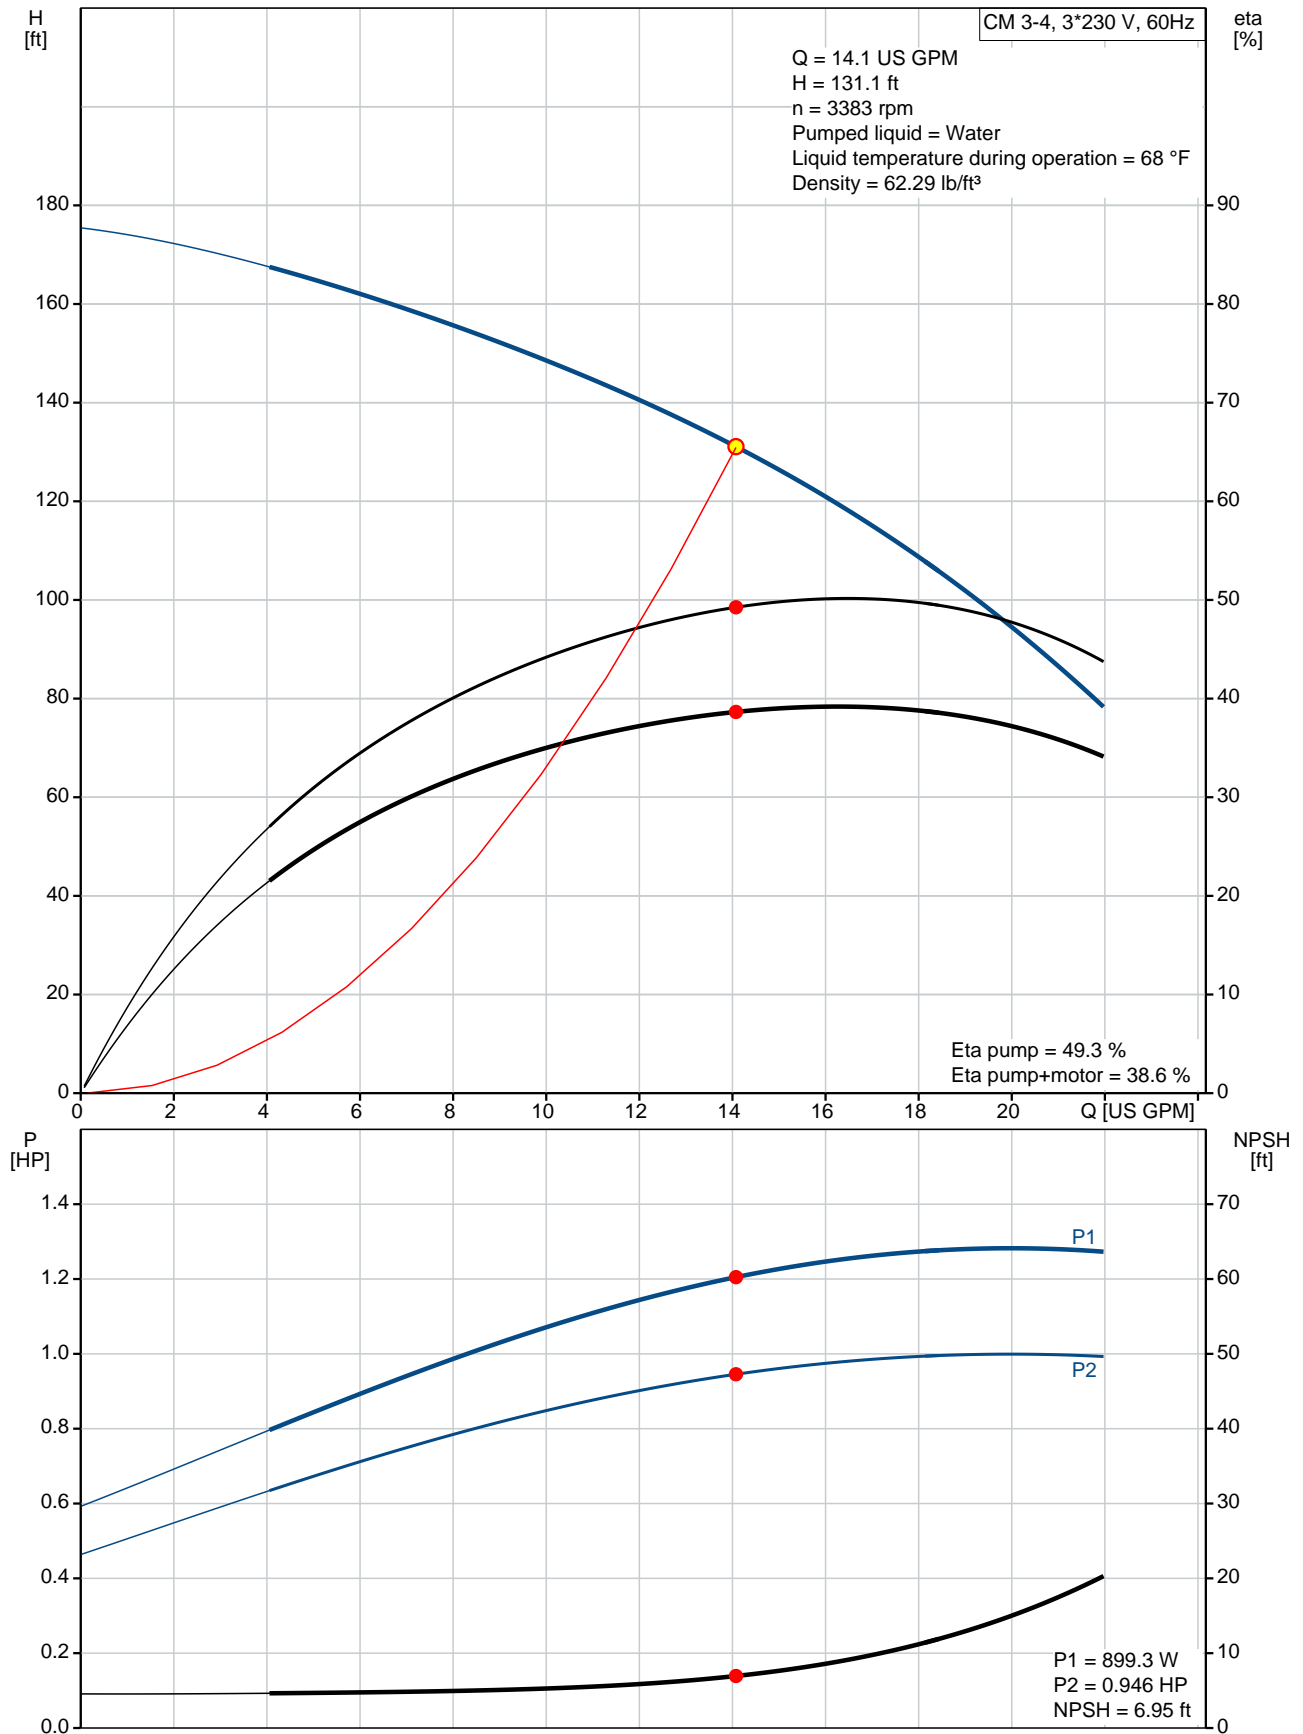

| Description | Value |
|------------------------------------------|-----------------------------|
| General information: | |
| Product name: | CM 3-4 A-S-I-V-AQQV E-A-A-N |
| Product No: | 97568357 |
| EAN number: | 5700318669184 |
| | 5700318669184 |
| Technical: | |
| Pump speed on which pump data are based: | 3480 rpm |
| Actual calculated flow: | 14.1 US GPM |
| Rated flow: | 16.4 US GPM |
| Resulting head of the pump: | 131.1 ft |
| Rated head: | 129.4 ft |
| Impellers: | 4 |
| Code for shaft seal: | AQQV |
| Curve tolerance: | ISO9906:2012 3B |
| Pump version: | A |
| Model: | A |
| Materials: | |
| Pump housing: | Stainless steel |
| | EN 1.4301 |
| | AISI 304 |
| Impeller: | Stainless steel |
| | EN 1.4301 |
| | AISI 304 |
| Material code: | I |
| Code for rubber: | V |
| Installation: | |
| Range of ambient temperature: | -4 .. 131 °F |
| Maximum operating pressure: | 232.06 psi |
| Max pressure at stated temp: | 232 psi / 194 °F |
| | 145 psi / 250 °F |
| Type of connection: | NPT(F) |
| Size of inlet connection: | 1 inch |
| Size of outlet connection: | 1 inch |
| Outlet position: | 12 |
| Connect code: | S |
| Liquid: | |
| Pumped liquid: | Water |
| Liquid temperature range: | -4 .. 248 °F |
| Selected liquid temperature: | 68 °F |
| Density: | 62.29 lb/ft³ |
| Electrical data: | |
| Motor standard: | NEMA |
| Frame size: | 71B |
| Rated power - P2: | 0.992 HP |
| Mains frequency: | 60 Hz |
| Suitable for 50/60 Hz: | N |
| Phases: | 3 |
| Rated voltage: | 208-230YY/440-480Y V |
| Service factor: | 1.00 |
| Rated current: | 3,4-3,6/1,7-1,8 A |
| Rated speed: | 3220-3370 rpm |
| Enclosure class (IEC 34-5): | IP55 |
| Insulation class (IEC 85): | F |
| Built-in motor protection: | NONE |
| Controls: | |
| Frequency converter: | NONE |
| Others: | |

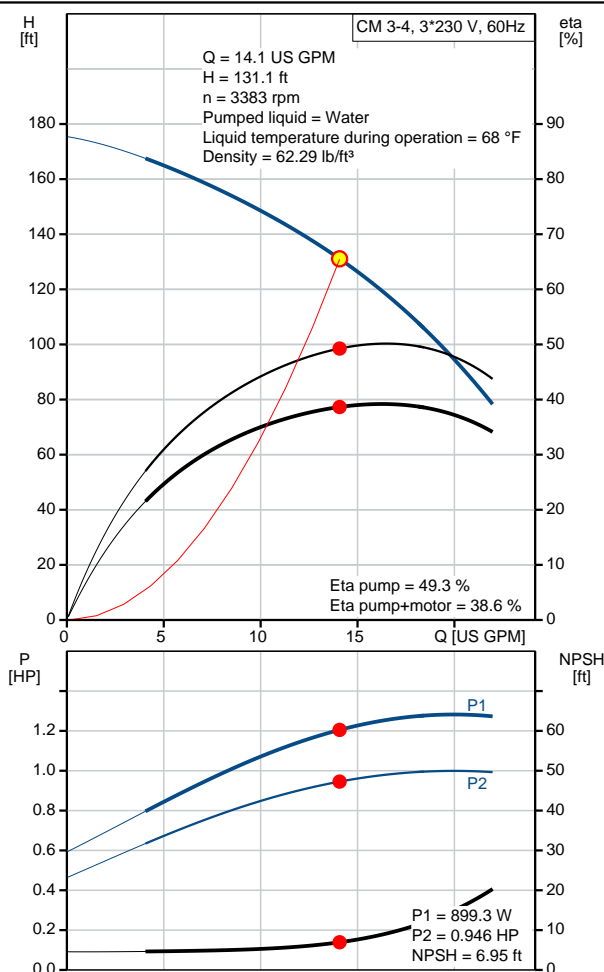



Company name:

Created by:


Phone:

Date:

26/03/2020

| Description | Value |
|---------------------------------------|------------------------------------|
| Terminal box position: | 12 |
| Minimum efficiency index, MEI â‰¥: | 0.7 |
| Net weight: | 28.1 lb |
| Gross weight: | 33.6 lb |
| Approvals: | CE,CULUS,WRAS,ACS,TR,EA C,CURUS |
| Country of origin: | US |
| Custom tariff no.: | 8413.70.2040 |

97568357 CM 3-4 A-S-I-V-AQQV E-A-A-N 60 Hz

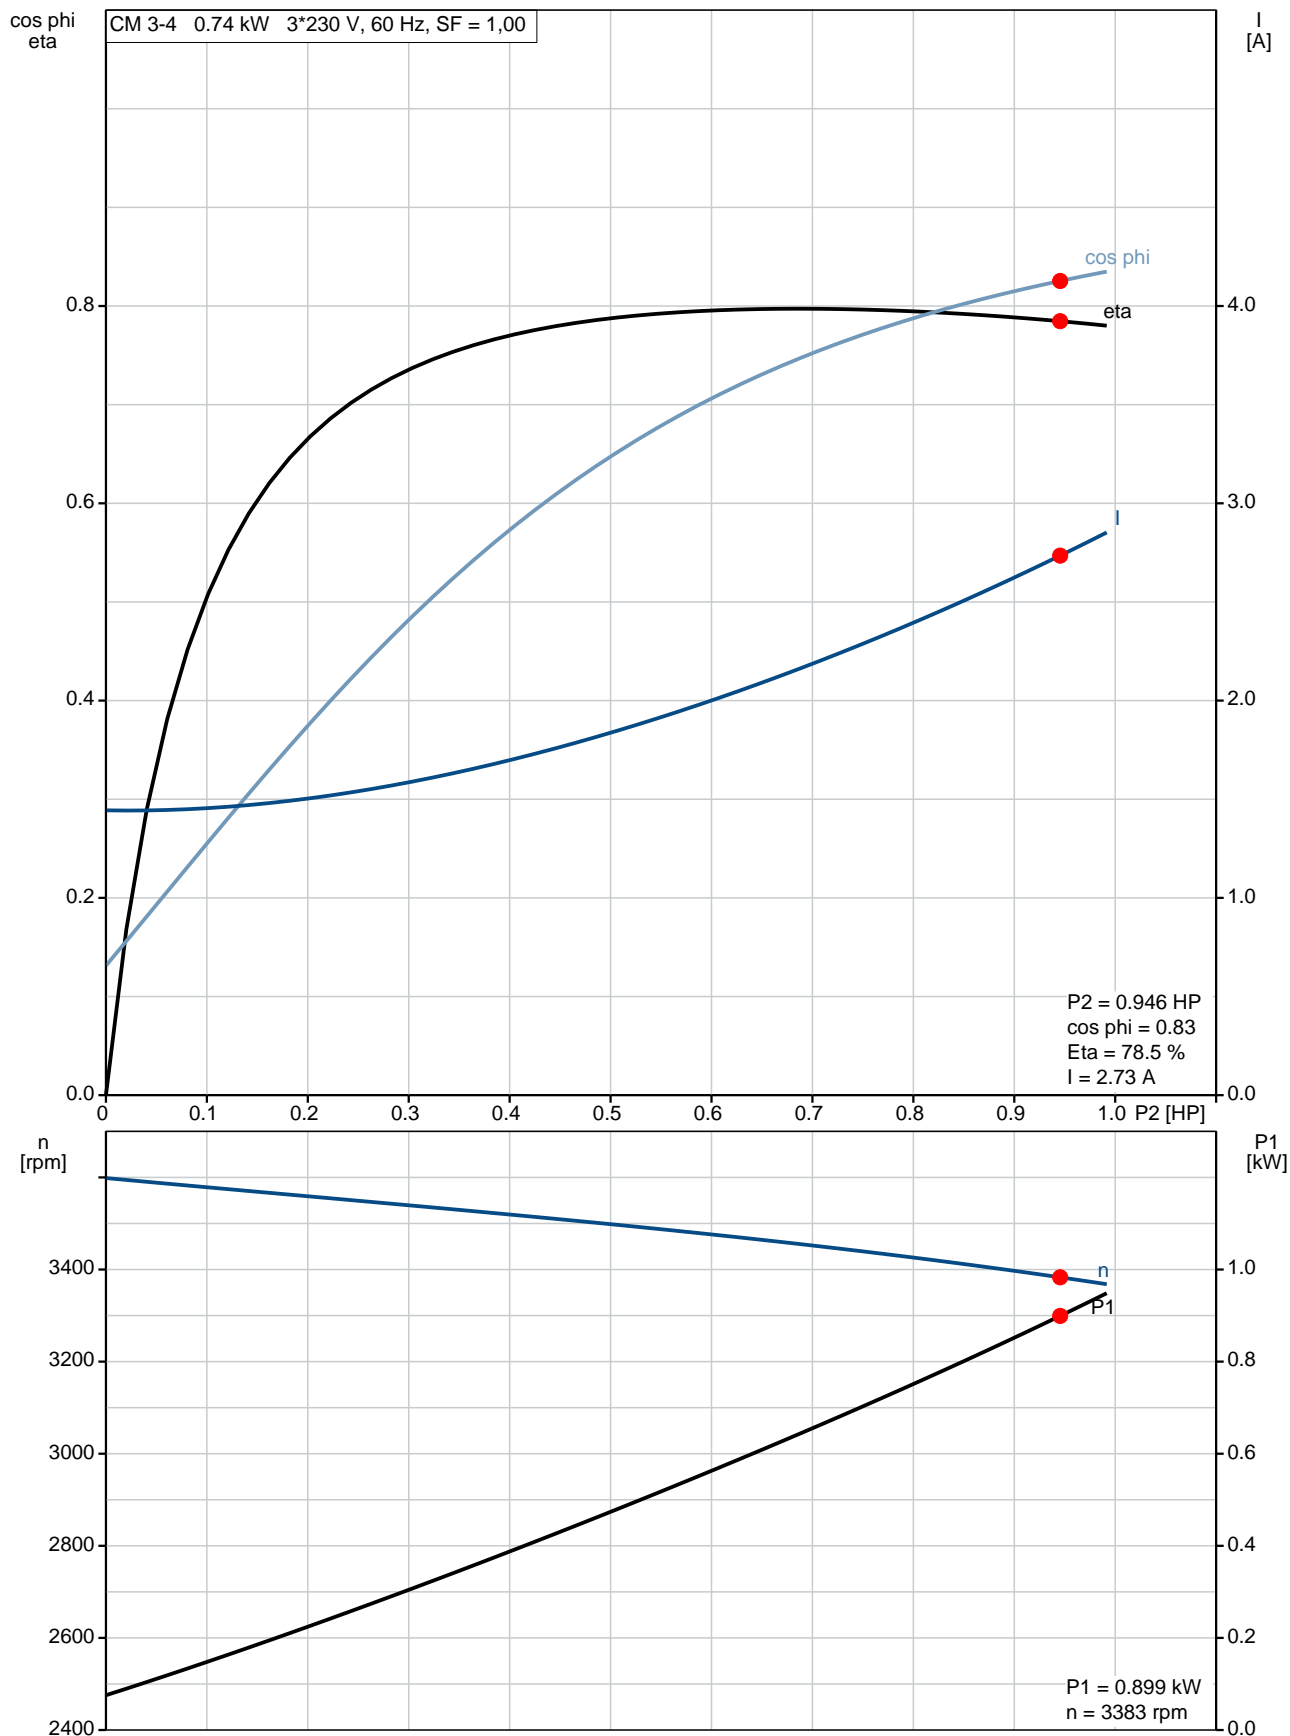

97568357 CM 3-4 A-S-I-V-AQQV E-A-A-N 60 Hz




WARNING

MOTOR MUST BE GROUNDED IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE AND LOCAL CODES BY TRAINED PERSONNEL TO PREVENT SERIOUS ELECTRICAL SHOCKS.

TO SERVICE MOTOR, DISCONNECT POWER SOURCE FROM MOTOR AND ANY ACCESSORY DEVICES AND ALLOW MOTOR TO COME TO A COMPLETE STAND STILL.

LOW VOLTAGE 60Hz. 208-230V



HIGH VOLTAGE 60Hz: 460V 50Hz: 400V



INTERCHANGE ANY TWO LINE
WIRES TO REVERSE ROTATION

THERMOSTAT LEADS
(WHEN PROVIDED)



Note! All units are in [in] unless others are stated.