

PROJECT: _____	UNIT TAG: _____	QUANTITY: _____
REPRESENTATIVE: _____	TYPE OF SERVICE: _____	DATE: _____
ENGINEER: _____	SUBMITTED BY: _____	DATE: _____
CONTRACTOR: _____	APPROVED BY: _____	DATE: _____
	ORDER NO.: _____	DATE: _____





Product photo could vary from the actual product

Hydro Multi-E 2 CRE 3-9

Energy efficient pressure boosting system for boosting of clean water. Available with 2 or 3 parallel connected frequency controlled pumps, integrated advanced controller and all necessary fittings.

Conditions of Service	Pump Data	Motor Data
Efficiency: _____	Maximum operating pressure: 232.06 psi	Rated voltage: 460 V
Liquid: Water	Liquid temperature range: 32 .. 140 °F	Main frequency: 60 Hz
Temperature: 68 °F	Product number: 99334002	
NPSH required: ft		
Specific Gravity: 1.000		

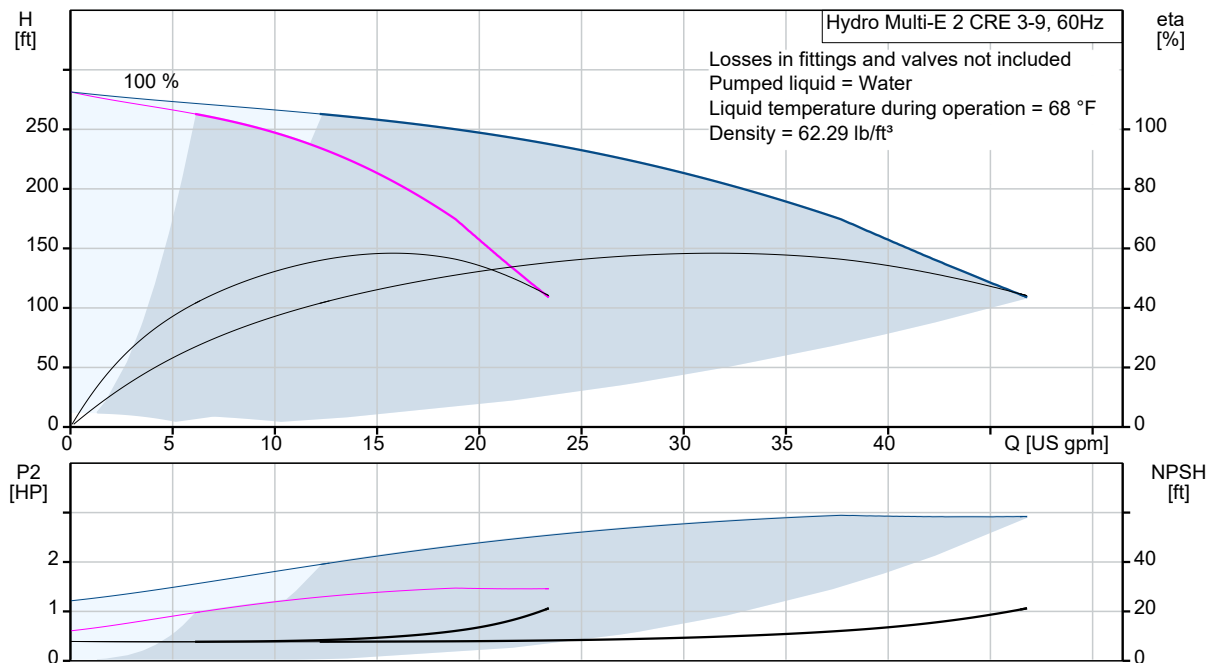

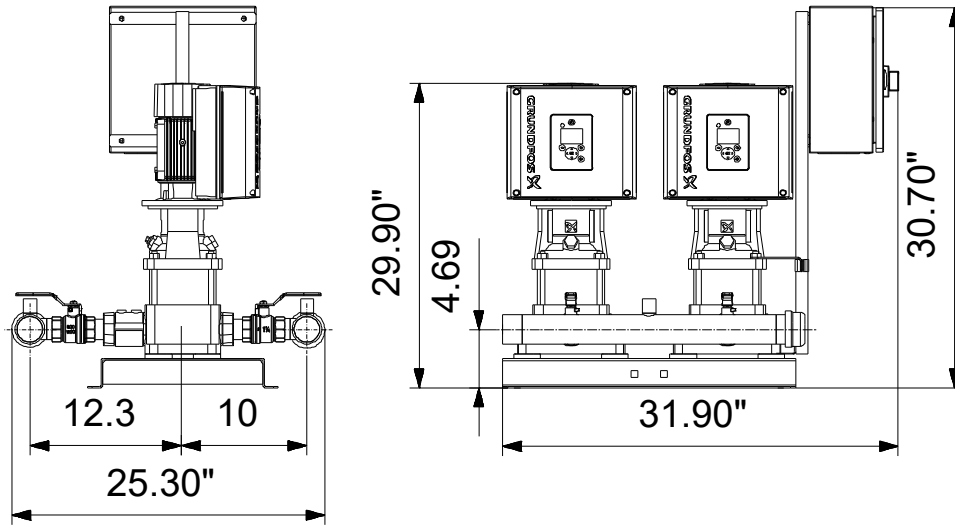


Materials:

Pump housing: Cast iron

Manifolds: Stainless steel

Count	Description
1	<p>Hydro Multi-E 2 CRE 3-9</p>  <p>Product photo could vary from the actual product</p> <p>Product No.: 99334002</p> <p>A GRUNDFOS Hydro Multi-E booster set consists of 2 to 4 speed controlled CR pumps (CRE pumps).</p> <p>Each CRE pump is equipped with an integrated variable frequency drive motor (MLE motor).</p> <ul style="list-style-type: none"> - Hydro Multi-E maintains constant pressure through continuous adjustment of the speed of the pumps. - The system performance is adapted to the demand through cutting in/out the required number of pumps and through parallel control of the pumps in operation. - Pump cascade control is based on first on first off to ensure equal pump wear. - All pumps in operation will run at equal speed. <p>GRUNDFOS Hydro Multi-E booster sets are designed for pressure boosting of clean water in residential/commercial building, municipal, industrial, and irrigation applications.</p> <p>The control of the Hydro Multi-E system is accomplished through Proportional-Integral control via a multi-pump controller card mounted in one of the MLE motors.</p> <p>The Hydro Multi-E system start/stop and set-point adjustment is possible through the use of two push buttons located on the MLE motor or with the R100 remote controller.</p> <p>The system consists of these parts:</p> <ul style="list-style-type: none"> - Suction manifold and discharge manifold made of 316 stainless steel. - Base frame made of 304 stainless steel. - One non-return valve (check valve), and two isolating valves for each pump. - Adapter with isolating valve for connection diaphragm tank. - Pressure gauge on suction and discharge manifolds. - Pressure transducer on discharge manifold. - Dry-running protection is standard with use of differential pressure switch on suction manifold. - A service disconnect switch located in a NEMA 3R enclosure is mounted to each pump for ease of service. - Grundfos bus communication with optional gateway connections for LON, Modbus, Profibus, BACnet, GSM <p>When delivered, the GRUNDFOS Hydro Multi-E booster set is factory tested and ready for operation.</p>



Company name:

Created by:

Phone:

Date:

1/12/2022

Count	Description
	Diaphragm tank is available as an accessory.
	Liquid:
	Pumped liquid: Water
	Liquid temperature range: 32 .. 140 °F
	Selected liquid temperature: 68 °F
	Density: 62.29 lb/ft³
	Materials:
	Pump housing: Cast iron
	Installation:
	Maximum operating pressure: 232.06 psi
	Maximum permissible inlet pressure: 145.04 psi
	Manifold inlet: 2" NPT
	Manifold outlet: 2" NPT
	Electrical data:
	Power (P2) main pump: 1.5 HP
	Main frequency: 60 Hz
	Rated voltage: 3 x 460 V
	Rated voltage main pump: 3 x 460 V
	Rated current: 4.1 A
	Start. method: electronically
	Radio interference suppression: IEC/CISPR 11-1B
	Tank:
	Diaphragm tank: No
	Others:
	Net weight: 219 lb
	Gross weight: 312 lb
	Shipping volume: 0.04 ft³
	Custom tariff no.: 8413.70.2040



Company name:


Created by:

Phone:




Date:

1/12/2022


99334002 Hydro Multi-E 2 CRE 3-9 60 Hz

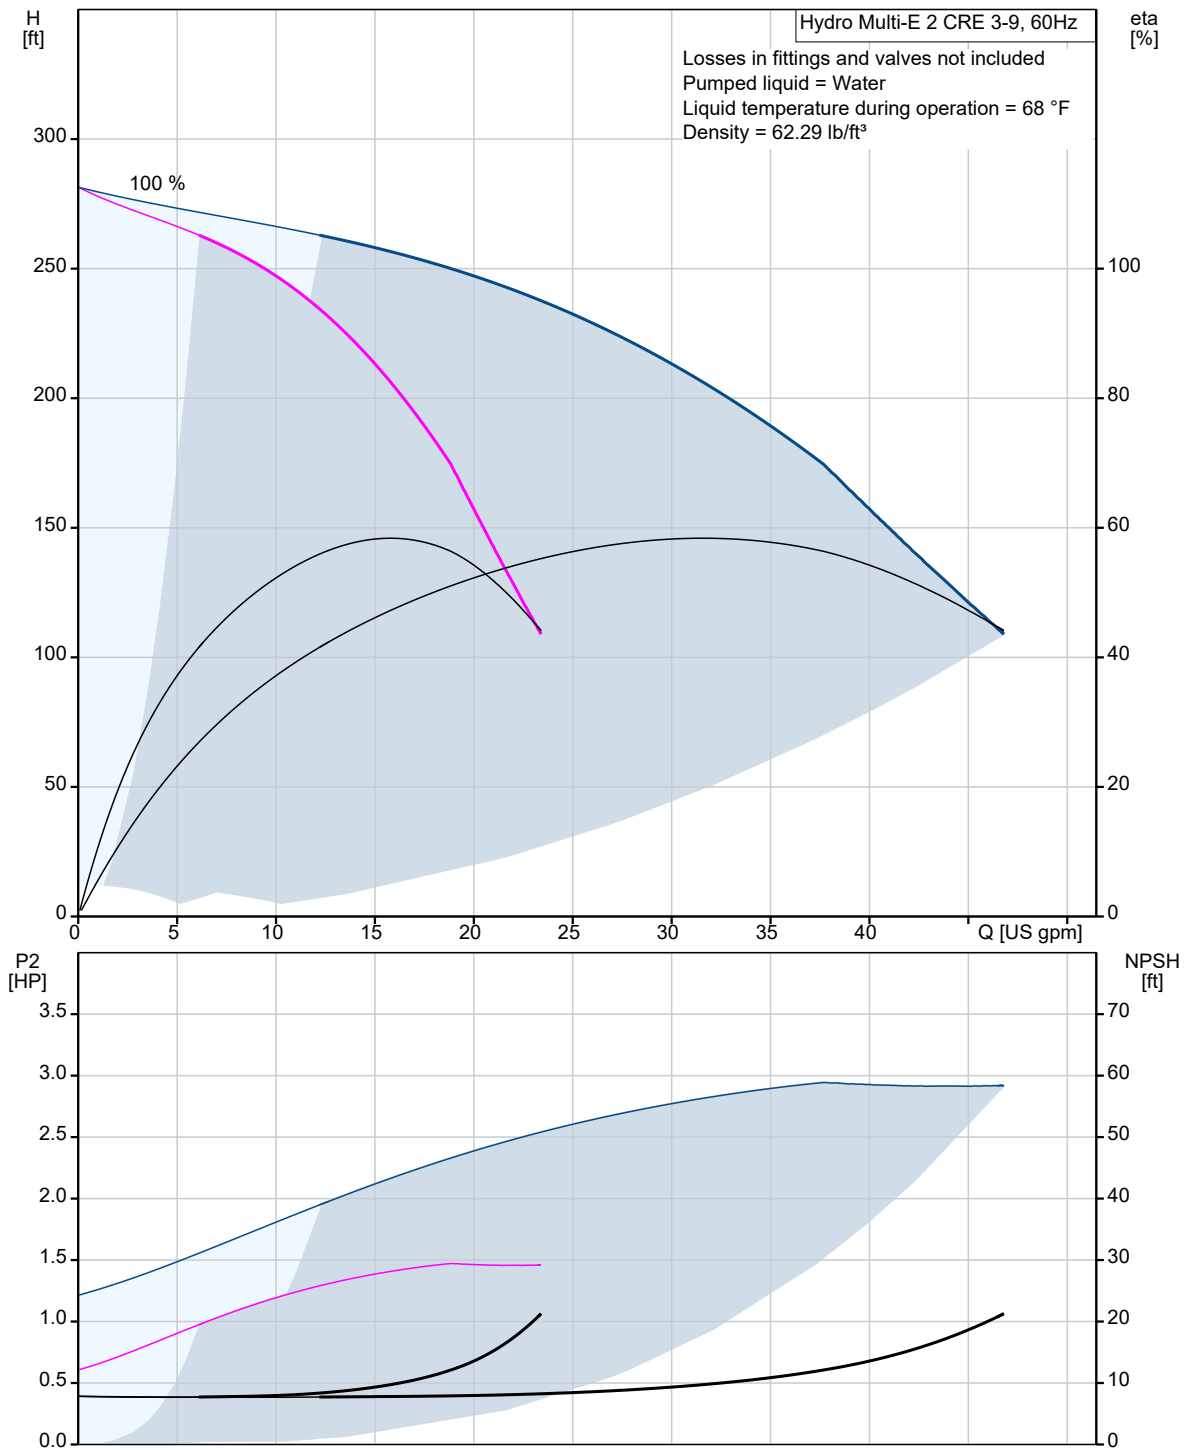

Description	Value
General information:	
Product name:	Hydro Multi-E 2 CRE 3-9
Product No.:	99334002
EAN:	5712609650511
Technical:	
Min flow system:	0 US gpm
Max flow system:	48.4 US gpm
Maximum head:	280.9 ft
Pump name:	CRE3-9
Number of pumps:	2
Materials:	
Pump housing:	Cast iron
Manifolds:	Stainless steel
Installation:	
Maximum operating pressure:	232.06 psi
Maximum permissible inlet pressure:	145.04 psi
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	32 .. 140 °F
Selected liquid temperature:	68 °F
Density:	62.29 lb/ft³
Electrical data:	
Power (P2) main pump:	1.5 HP
Main frequency:	60 Hz
Rated voltage:	3 x 460 V
Rated voltage main pump:	3 x 460 V
Rated current:	4.1 A
Start. method:	electronically
Radio interference suppression:	IEC/CISPR 11-1B
Tank:	
Diaphragm tank:	No
Others:	
Net weight:	219 lb
Gross weight:	312 lb
Shipping volume:	0.04 ft³
Sales region:	Namreg
Product range:	NAMREG
Custom tariff no.:	8413.70.2040

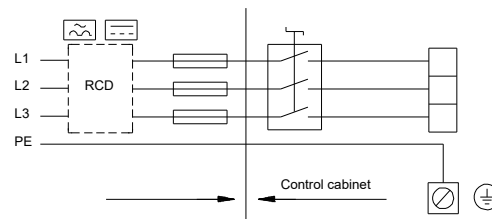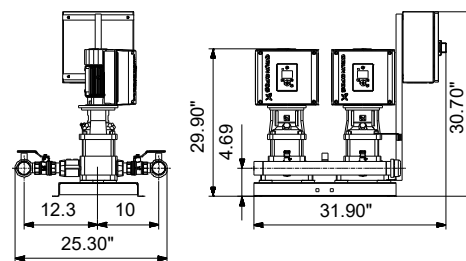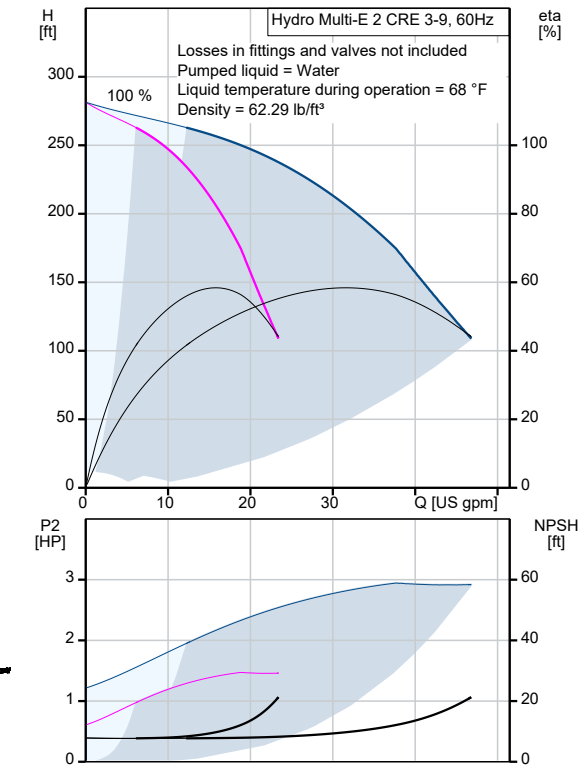

99334002 Hydro Multi-E 2 CRE 3-9 60 Hz

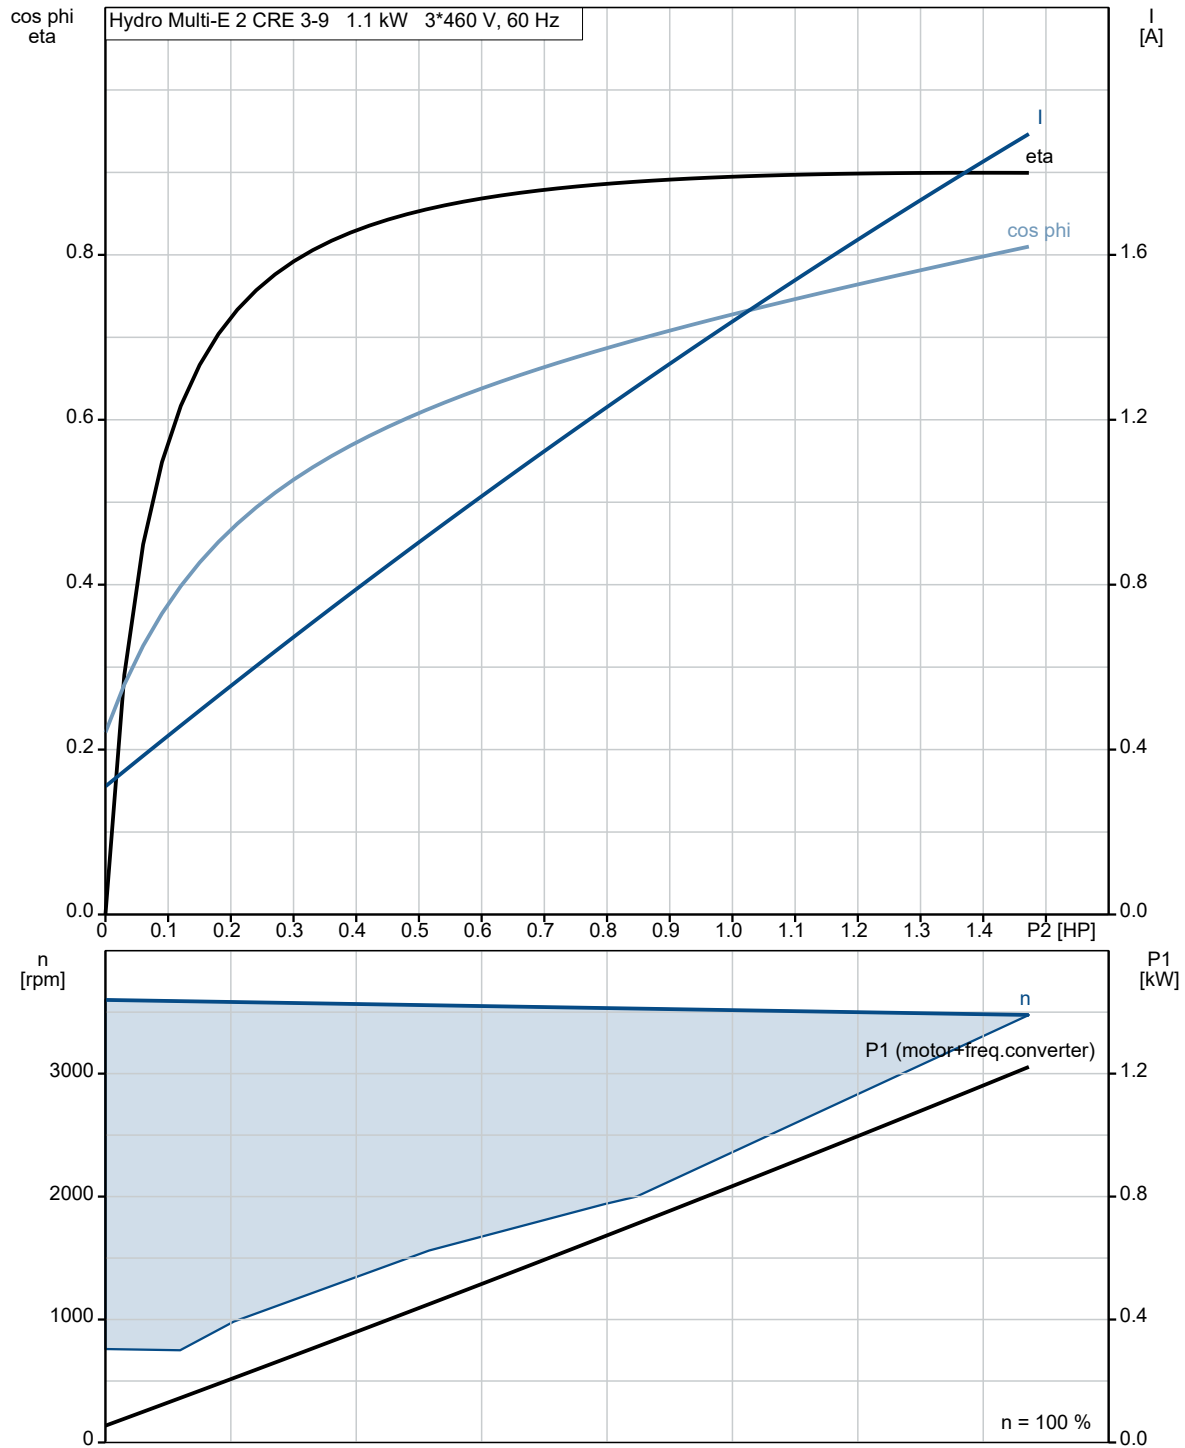



Company name:


Created by:

Phone:

Date:


1/12/2022

99334002 Hydro Multi-E 2 CRE 3-9 60 Hz

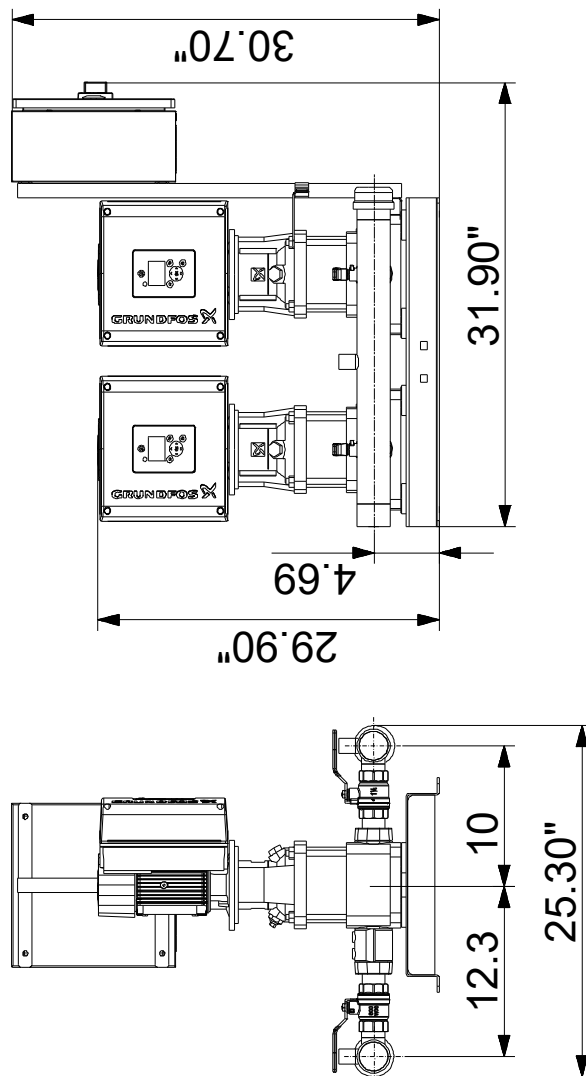

Note! All units are in [in] unless otherwise stated.
Disclaimer: This simplified dimensional drawing does not show all details.

99334002 Hydro Multi-E 2 CRE 3-9 60 Hz

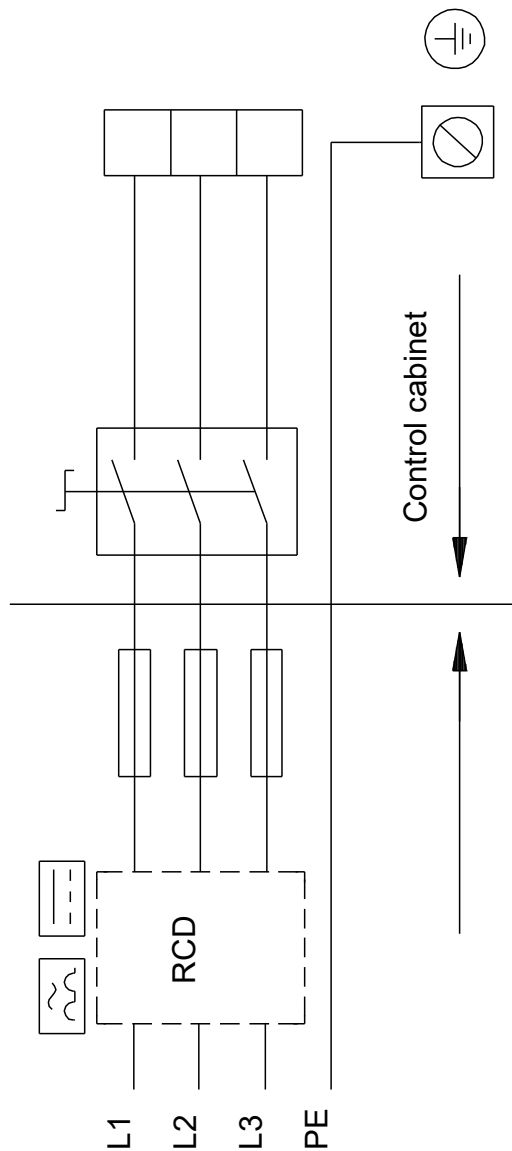

All units are [in] unless otherwise presented.