

Submittal Data

PROJECT:	UNIT TAG:	QUANTITY:
REPRESENTATIVE:	TYPE OF SERVICE:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:
	ORDER NO.:	DATE:




CUE 3X200-240V IP66 0,75KW DC

CUE

Note! Product picture may differ from actual product

Conditions of Service	Pump Data	Motor Data
	<div>Maximum ambient temperature:113 °F</div> <div>Approvals:CE, CULUS, C-TICK</div> <div>Product number:99619018</div>	<div>Mains frequency:50 / 60 Hz</div> <div>Enclosure class:IP66</div> <div>Motor protection:YES</div> <div>Thermal protection:external</div>

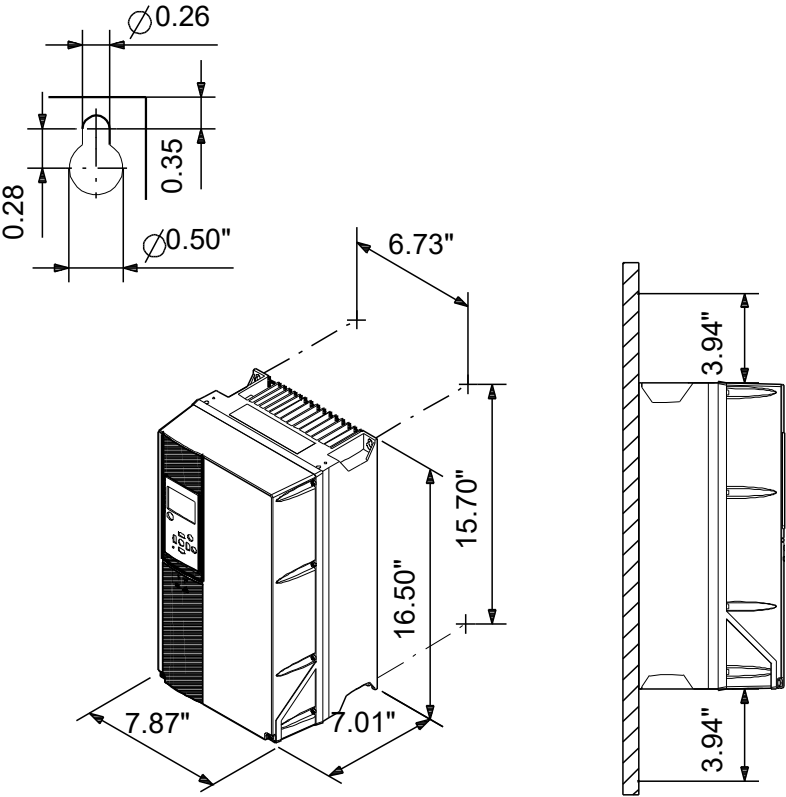

**Materials:**

Qty.	Description
------	-------------

1	CUE 3X200-240V IP66 0,75KW DC
---	-------------------------------



Note! Product picture may differ from actual product

Product No.: [99619018](#)

CUE is a complete range of external frequency converters designed for speed control of a wide range of Grundfos pumps. CUE has a built-in PI controller and offers the same functionality and user-interface as Grundfos E-pumps. CUE solutions can thus be seen as an extension to the E-pump range.

By choosing a CUE-solution, you will get the following benefits:

- Grundfos E-pump functionality and user-interface
- application- and pump-family-related functions
- increased comfort compared to fixed-speed pumps
- very easy installation and commissioning compared to standard frequency converters
- speed control of pumps up to 250 kW
- speed control of pumps installed in potentially explosive environments.

CUE offers the following inputs and output:

- RS-485 GENIbus
- an analog 0-10 V input for external setpoint
- an analog 0/4-20 mA input for sensor
- four digital inputs for various functions, for instance external start/stop
- two signal relays (C/NO/NC).

Accessories:

Input/output add-on board

Provides additional input:

- one 0/4-20 mA analog input for an additional sensor
- one 0-20 mA analog output
- two inputs for Pt100/Pt1000 temperature sensors, for instance for bearing monitoring.

Motor filters:

For reduction of dU/dt and peak voltages to the motor windings and for reduction of the acoustic noise generated in the motor, a number of motor filters are offered:

- dU/dt filters , 11-250 kW
- Sine wave filters, 0.55-250 kW.

Technical:

Approvals: CE, CULUS, C-TICK

Installation:

Range of ambient temperature: 32 .. 113 °F

Relative humidity: 5-95 %

Electrical data:

Rated power - P2: 1 HP

Mains frequency: 50 / 60 Hz

Rated voltage: 3 x 200-240 V

Rated current: 4.6 A

Maximum current consumption: 4.6 A





Efficiency at full load: 96 %

Enclosure class (IEC 34-5): IP66


Others:

Qty.	Description
1	Net weight: 20.3 lb Gross weight: 20.7 lb Country of origin: US Custom tariff no.: 8504.40.4000

Description	Value
<b>General information:</b>	
Product name:	CUE 3X200-240V IP66 0,75KW DC
Product No:	99619018
EAN number:	5713832013180
<b>Technical:</b>	
Approvals:	CE, CULUS, C-TICK
<b>Installation:</b>	
Range of ambient temperature:	32 .. 113 °F
Relative humidity:	5-95 %
Mounted on:	WALL
<b>Electrical data:</b>	
Rated power - P2:	1 HP
Mains frequency:	50 / 60 Hz
Rated voltage:	3 x 200-240 V
Rated current:	4.6 A
Maximum current consumption:	4.6 A
Efficiency at full load:	96 %
Enclosure class (IEC 34-5):	IP66
Built-in motor protection:	YES
Thermal protec:	external
Cable length:	150/300 m
<b>Others:</b>	
Net weight:	20.3 lb
Gross weight:	20.7 lb
Country of origin:	US
Custom tariff no.:	8504.40.4000

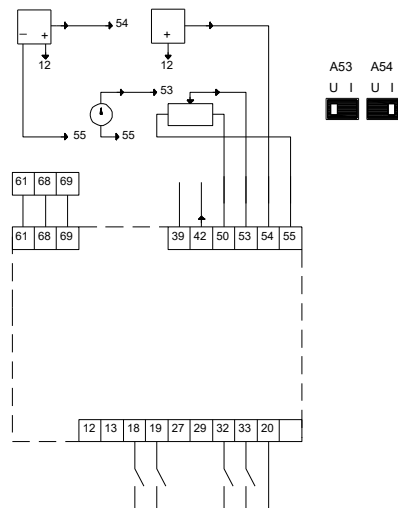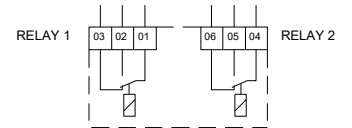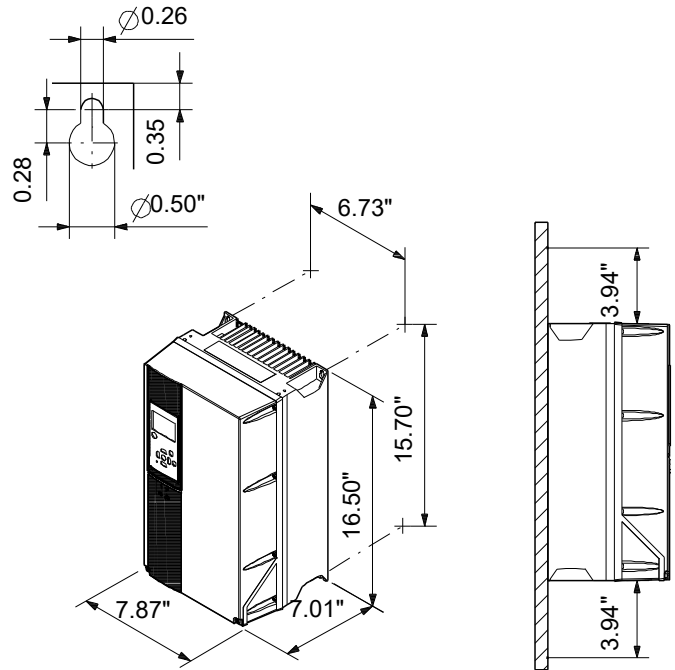

## 99619018 CUE 3X200-240V IP66 0,75KW DC

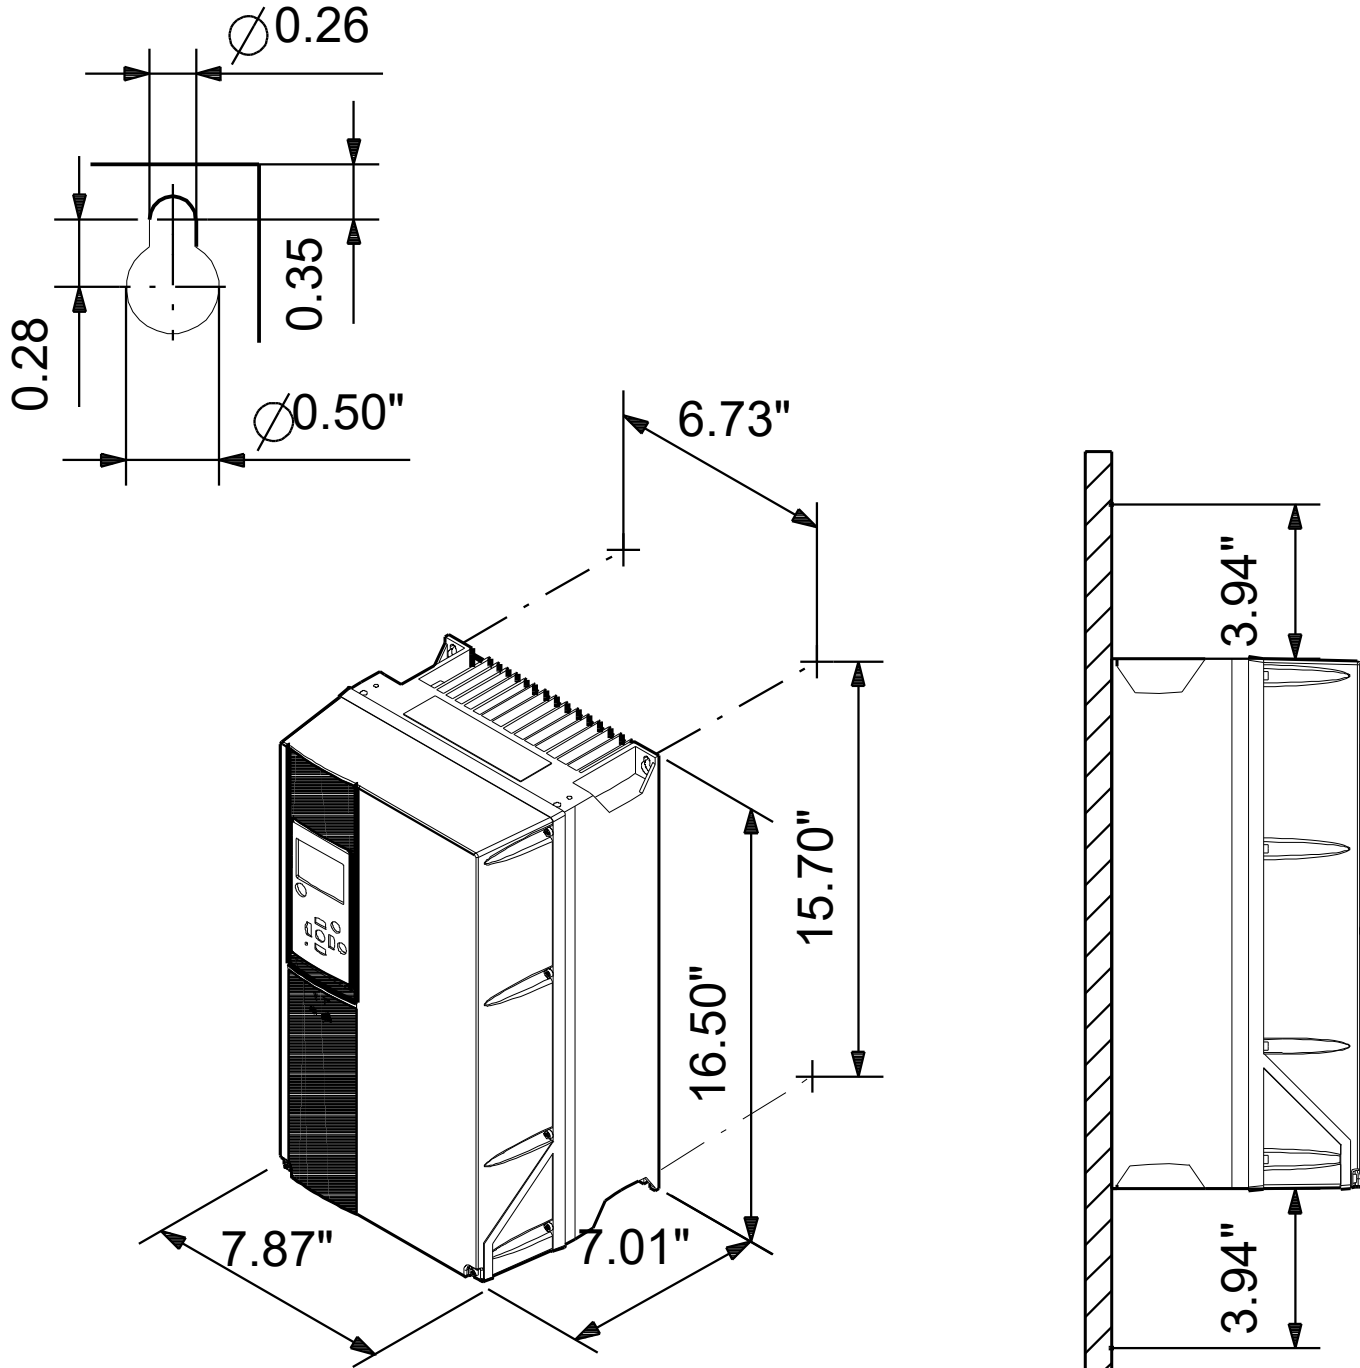

## 99619018 CUE 3X200-240V IP66 0,75KW DC

