




HVX2D6R-46SVX21GKAXX0-G

Created On: 7/24/25

HVX2D6R-46SVX21GKAXX0-G | Configuration Summary



Designed to transfer and increase the pressure of clean water, e-HVX & e-HVXR Packaged Booster Systems integrate decades of expertise and know-how in pump technology to bring the right combination of motors, variable speed drive and hydraulic pumps in one comprehensive, highly efficient boosting solution.

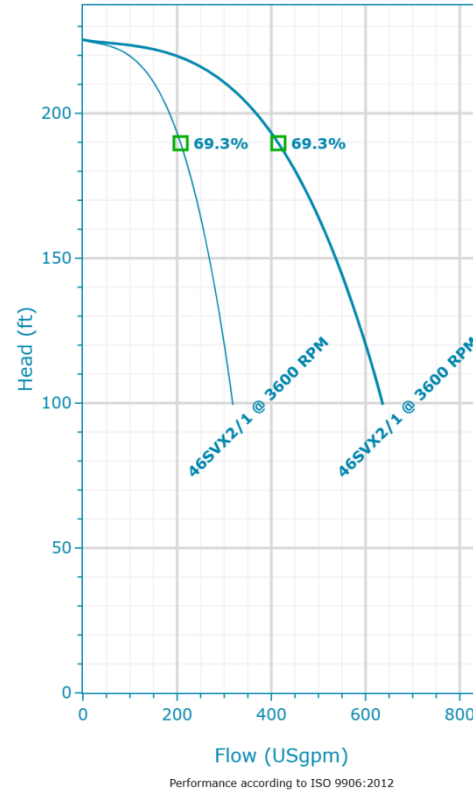

PUMP

Model
46SVX2/1 3600rpm

Installation
Complete Pump

PACKAGED SYSTEM

Number Of Units
Duplex

Suction Type
Pressurized

Header Size
6 in

SEAL

Type of Seal
Type 21

Rotating Face
Carbon

Stationary Face
Silicon Carbide

Elastomers
FKM

STANDARD OPTIONS

Panel Orientation
Right

MOTOR

Frequency (Hz)
60

Power
15 hp

Poles
4

Phase (~)
3

Enclosure
TEFC

Voltage
380-480 V

HVX2D6R-46SVX21GKAXX0-G | Product Details


Construction Materials

Pump Body (1) Cast Iron (ASTM Class 35/40B)	Shaft (5) Stainless Steel (AISI 316)	Seal Plate (9) Stainless Steel (AISI 316L)	Tie Rods (13) Carbon Steel / Zinc Plated (A29 Gr. 1045)
Impeller (2) Stainless Steel (AISI 304)	Adapter (6) Cast Iron (ASTM Class 35/40B)	Coupling Guard (10) Stainless Steel (AISI 304)	Wear Ring (14) PPS
Diffuser (3) Stainless Steel (AISI 304)	Base (7) Powder Coated Steel (HRPO)	Shaft Sleeve and Bushing (11) Tungsten Carbide	Seal Gland (15) Stainless Steel (AISI 316)
Casing (4) Stainless Steel (AISI 316L)	Coupling (8) Aluminum (A384.0-F)	Fill/Drain Plugs (12) Stainless Steel (AISI 316)	Panel Stand (16) Powder Coated Steel (ASTM A500)

Motor

Enclosure TEFC	Rated Power 15 hp	Phase 3	MCA 55.25
Speed 3,600 rpm	Rated Voltage 380-480 V	FLA 49	

HVX2D6R-46SVX21GKAXX0-G | Hydraulic Data & Performance Curve

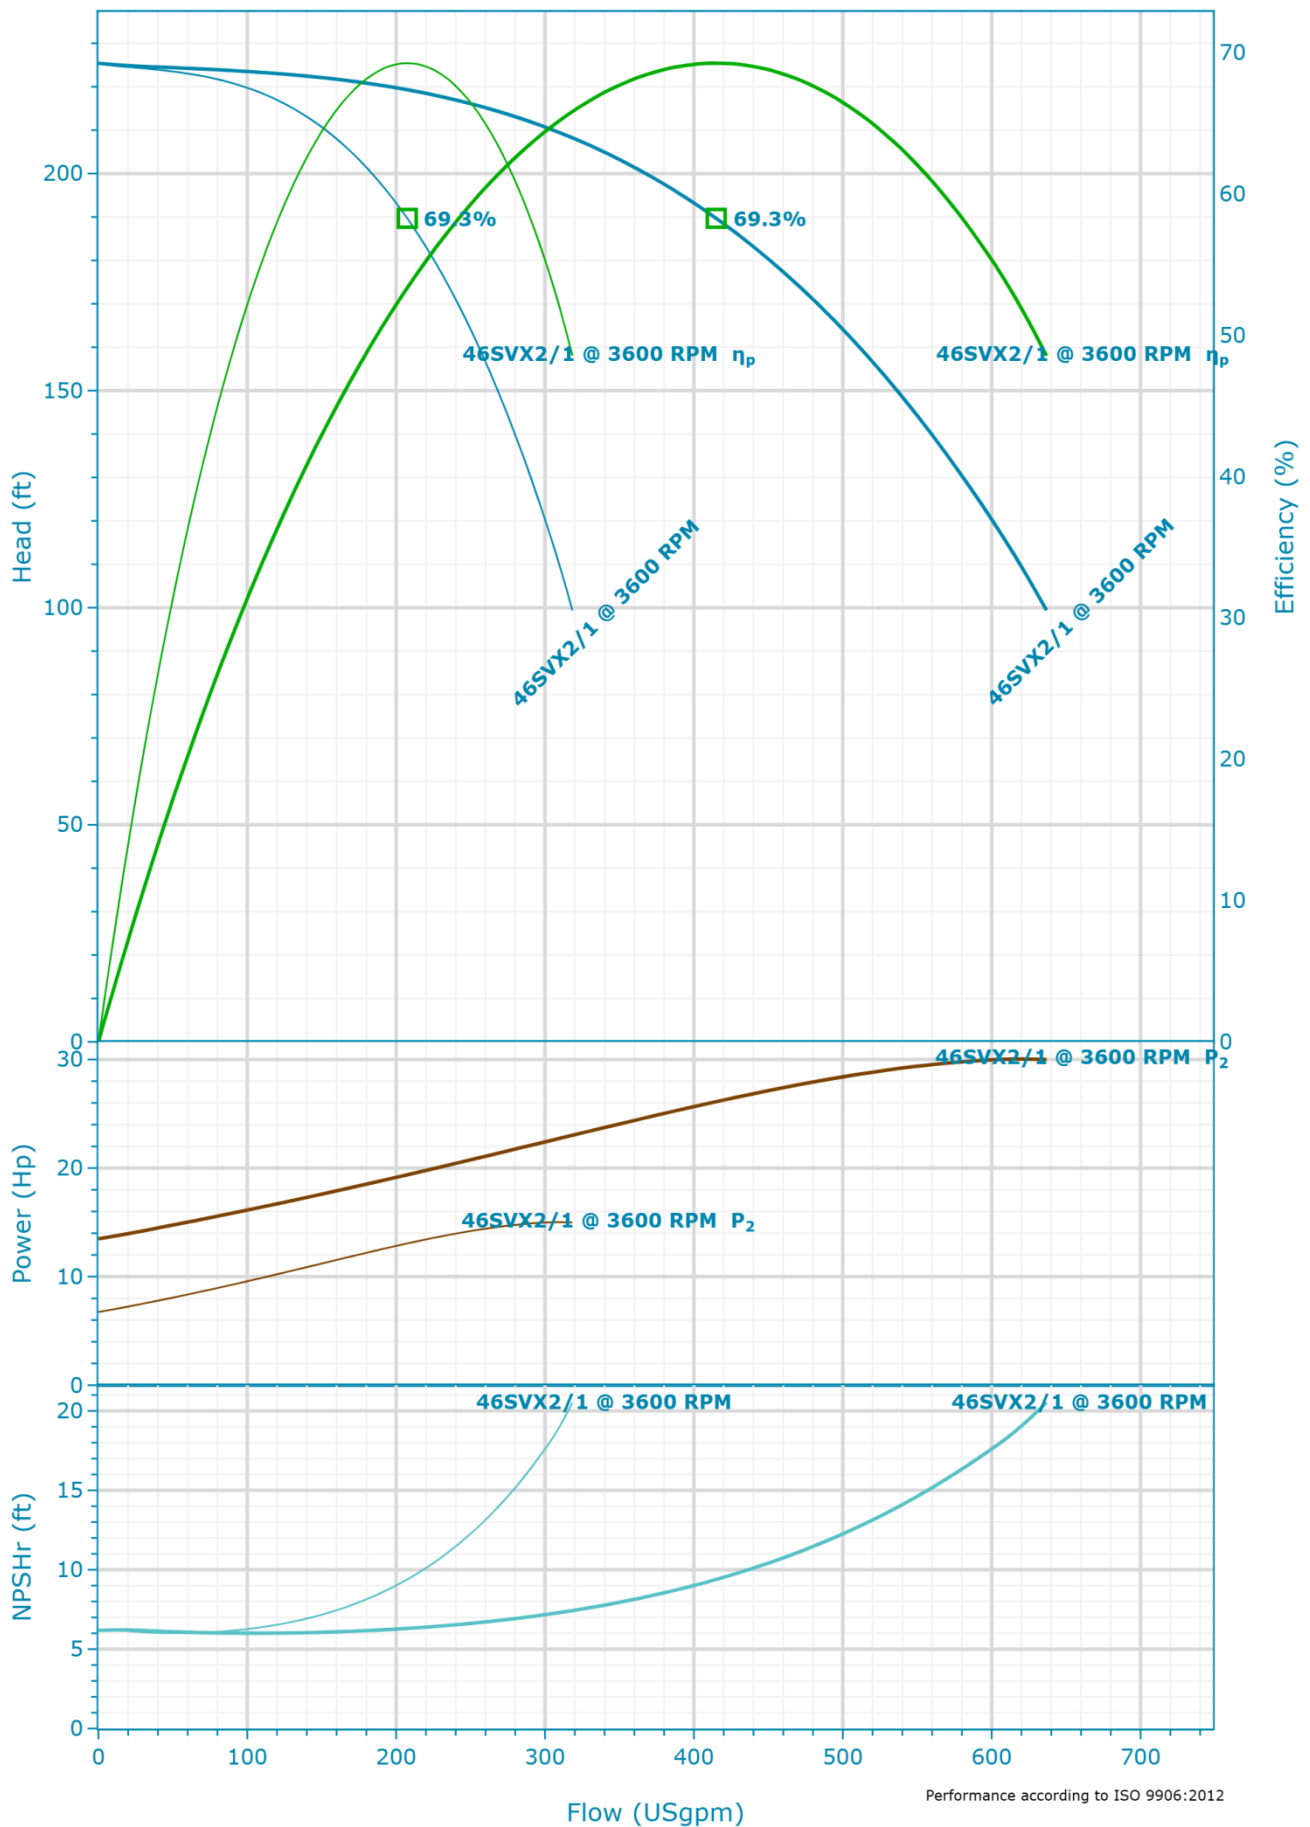

Selection

Series	System Type
AQUAFORCE e-HVX	Multi Pump
Name	Operating Pumps
HVX2 46SVX2/1	2
Stages	Standby Pumps
2	No Standby Pump
Frequency	
60 Hz	
Suction Type	
Pressurized	
Station Losses	
5.00 psi	
Acceptance Grade	
Manufacturer's Standard	

Fluid

Fluid Type	Density
Water	62.428 lb/ft ³
Fluid Temperature	Dynamic Viscosity
39.2 °F	1.567212 cP
Specific Gravity	Fluid Vapor Pressure
1	0.118 psi

Design Curve - Single Pump



Rated Speed	BEP Flow (1x)
3,600 RPM	207.5 USgpm
Max Flow (1x)	BEP Head (1x)
318.4 USgpm	189.69 ft
H@QMin (1x)	Max Operating Pressure (1x)
225.4 ft	97.58 psi
H@QMax (1x)	Max P2 (1x)
99.4 ft	15.02 Hp
BEP (1x)	
69.3 %	

Design Curve - System


Rated Speed	BEP Flow
3,600 RPM	414.99 USgpm
Max Flow	BEP Head
636.8 USgpm	189.69 ft
H@QMin	Max Operating Pressure
225.4 ft	97.58 psi
H@QMax	Max P2
99.4 ft	30.05 Hp
BEP	
69.3 %	

HVX2D6R-46SVX21GKAXX0-G | Dimensional Data & Drawing

e-HVX Dimensions
46SVX Duplex Pump
LEFT ORIENTATION

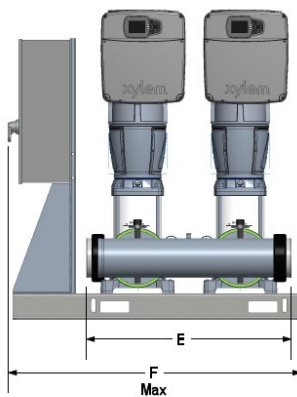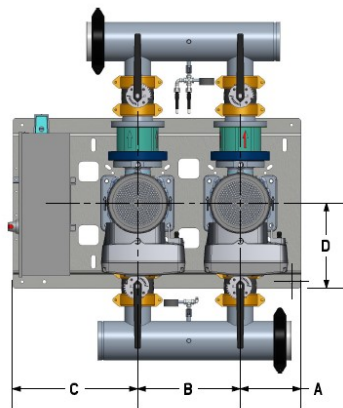

RIGHT ORIENTATION

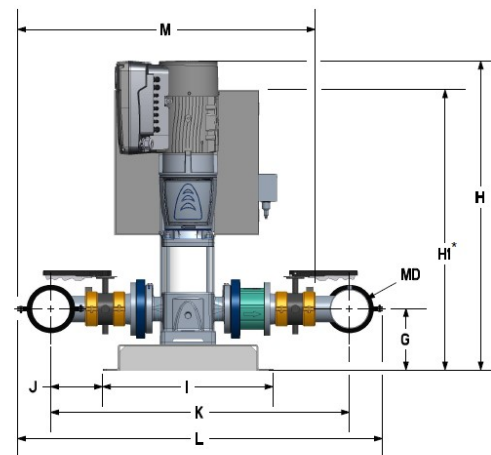

*Note: If Antenna is put on top of electric panel, Height H1 will be increased by 1.75" [45mm]

Dimensions

A	E	H1	L
10.25 in	34.5 in	47.25 in	61.5 in
B	F	I	M
17.375 in	49.25 in	28.75 in	50.125 in
C	G	J	MD
21.125 in	10.375 in	8.75 in	6 in
D	H	K	Weight
14.375 in	47.25 in	50.375 in	1,428 lb

Company	PFC Equipment
Contact	Kelly Kresa
Phone No.	7633915856
Email	kkresa@pfcequip.com